



ASX RELEASE

30 April 2015

About Globe

- Globe Metals & Mining Limited is a Perth based company listed on Australian Stock Exchange (ASX Code: GBE)
- Globe's principal exploration focus is to advance the Kanyika Niobium Project.
- The Kanyika Niobium Project is regarded as the 5th largest undeveloped niobium resource in the world.
- The Kanyika Niobium Project host to a 2004 JORC compliant Mineral Resource Estimate of 68.3M tonnes of Nb₂O₅ using a 1,500 ppm Nb₂O₅ cut-off (refer ASX announcement dated 7 January 2013).

Investment Summary

- 100% interest held on projects in Malawi (Africa) including niobium, graphite and rare earths

Directors and Management

Ms Alice Wong - Non-Executive Chairperson

Mr Alistair Stephens - Managing Director

Mr William Hayden - Non-executive Director

Mr Bo Tan - Non-executive Director

Mr Alex Ko - Non-executive Director

Capital Structure

Shares on Issue: 469,729,062

Options on Issue: 4,000,000 (various)

52 week range: \$0.02 - \$0.07

Last Price (29/4/2015): \$0.029

Market Capitalisation: \$13.622 million

Substantial Shareholders

Apollo Metals : 52.37%

Ao-Zhong International Minerals: 25.15%

Contact

Alistair Stephens

Managing Director

info@globemmm.com

T: +61 (0)8 9327 0700

March Quarter 2015 Review of Operations

Highlights

Kanyika Niobium Project

- Work during the quarter involved the provision of documentation in support of the Company's Mining Lease Application and a consideration of project financing options.

Chiziro Graphite Project

- A further 94 rock chip assay results were received during the March 2015 Quarter with 36 samples reporting assays of greater than 10% TGC, with a highest assay of 20.7% TGC.
- The assay results demonstrate additional high-grade mineralisation within Globe's Chirizo Graphite Project area.
- All assays have now been received from sampling programs completed to date.

Corporate & Finance

- Cash at bank and in term deposits at 31 March 2015 of \$16.451 million.
- 3,800,000 Unlisted Options lapsed as at 31 January 2015.
- Michael Fry was appointed as Company Secretary on 2 February 2015.

Globe Metals & Mining Limited (ASX Code: GBE) (“**Globe**” or “**the Company**”) is pleased to provide its activities report for the quarter ended 31 December 2014.

1. Overview of Exploration Activities

Globe’s focus of operations is in Malawi in southeast Africa of which the Company’s most advanced project is the Kanyika Niobium Project (KNP). The KNP is considered a world class niobium (Nb) and tantalum (Ta) resource. These metals are key additives in steel manufacture, electronics and ceramics.

At Globe’s KNP asset, a resource estimated sufficient to sustain a 20-year mine life has been defined, however, the Company continues to explore its licence for further Nb-Ta resources.

In addition to KNP, Globe has three other exploration projects in Malawi as follows:

- Chiziro Graphite Project - in 2014 Globe completed 6,266 metres of trenching at its Chimutu Prospect and in the process outlined six kilometres strike of high-grade graphite mineralisation. In addition to which mapping and rock chip sampling has located further prospects. Work to date has defined drill targets that there are plans to test in 2015. Favourable preliminary metallurgical test work has been reported on previously by Globe.
- Machinga Rare Earths Project - this is an early stage exploration project, however, soil sampling programmes in 2013 and 2014 field seasons have outlined substantial rare earth element (REE) and Nb-Ta anomalism that will require further follow up in 2015.
- Salimbidwe Rare Earths Project - This is also an early stage exploration project that will have further evaluation completed during 2015.

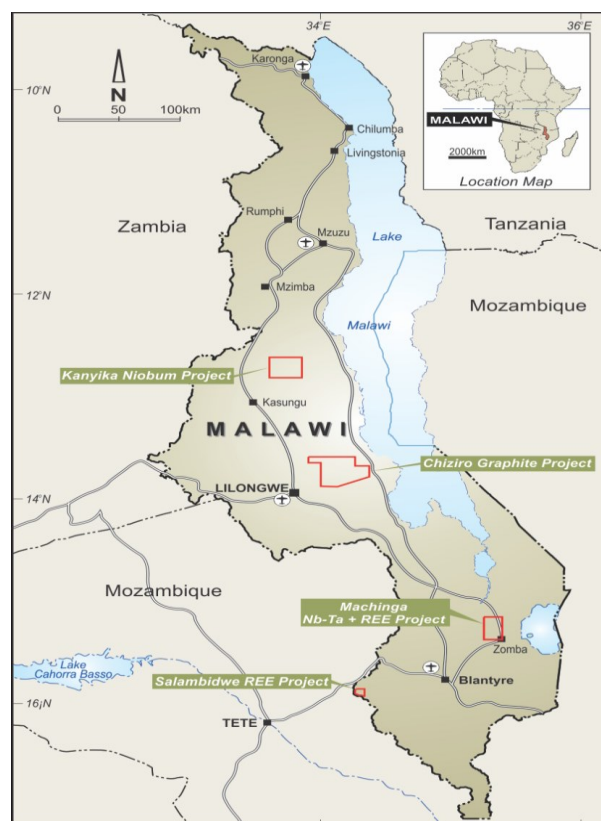


Figure 1- Malawi Projects Location Map.

2. Kanyika Niobium Project

2.1 Overview

Globe has been undertaking exploration and resource development activities at Kanyika since 2007 and in 2011 made the decision to proceed to undertaking a Definitive Feasibility Study (DFS), the technical aspects of which were completed by 31 December 2012.

As part of undertaking the DFS process an updated Mineral Resource was completed and on 7 January 2013 Globe made a release to the ASX stating a mineral resource inventory of 68.3M tonnes (equivalent) of Nb₂O₅ using a 1,500 ppm Nb₂O₅ cut-off (refer Table 1 & 2 below). No additions or changes have been made to this resource statement and it complies with the 2004 JORC guidelines for mineral resource statements as made in that release, (please refer to the “Competent Persons Statement” section on page 17).

Table 1: Mineral Resource Estimate for Kanyika using a 1,500 ppm Nb₂O₅ lower cut

Category	Million Tonnes	Nb ₂ O ₅ ppm	Ta ₂ O ₅ ppm
Measured	5.3	3,790	180
Indicated	47.0	2,860	135
Inferred	16.0	2,430	120
Total	68.3	2,830	135

Table 2: Mineral Resource Estimate for Kanyika using a 3,000 ppm Nb₂O₅ lower cut

Category	Million Tonnes	Nb ₂ O ₅ ppm	Ta ₂ O ₅ ppm
Measured	3.4	4,790	220
Indicated	16.6	4,120	190
Inferred	2.8	4,110	190
Total	22.8	4,220	190

In addition to on-going exploration activities, the Company is completing further Feasibility Optimisation as it awaits Mining Licence approval.

2.2 Development Agreement (DA) Negotiations

Globe held Development Agreement (DA) negotiations with representatives of the Government of Malawi during December 2014.

In May of 2014 there was a change of government in Malawi and the meeting in December 2014 was for the benefit of the new Minister and relevant senior government personnel to be brought up to date with the DA progress as part of the on-going DA negotiation process.

DA negotiations will continue in 2015 and it is anticipated they will be concluded to the benefit of all parties involved.

2.3 Kanyika Definitive Feasibility Study

Globe has progressed discussions with several groups interested in purchasing niobium and tantalum products from Kanyika, with the view to develop long-term product off-take agreements.

The Kanyika Technical Economic Return (TER) model has been revised to include results from the 2014 Kanyika concentrator pilot plant programme. Currently the TER model remains incomplete until costed product off-take agreements are established.

2.4 Mining Licence Application

The Kanyika Exclusive Prospecting Licence (EPL0188) expired at the end of December 2014, consequently Globe has applied for a Mining Licence (ML) to cover the Kanyika Nb-Ta resource, and all areas covering proposed mine infrastructure and prospective exploration areas.

The ML application was submitted to the Ministry of Mines in mid-December and Globe is awaiting Ministerial approval.

2.5 Kanyika Exploration Activities During This Quarter

No field work was completed during the March Quarter at Kanyika.

At the request of the Malawi Department of Mines information was provided in support of the Company's Mining Lease Application.

In addition, the Company gave consideration to various financing options.

3. Chiziro Graphite Project

3.1 Overview

The Chiziro Graphite Project is located to the north-east of the city of Lilongwe in Malawi and comprises Exploration Prospecting Licence (EPL0299).

During 2014, Globe completed trenching at the “Chimutu Prospect” and defined a six kilometre strike of high-grade graphite mineralisation. Subsequent mapping of other areas within the tenement area identified additional areas of interest.

3.2 Mapping & Sampling

During December 2014, reconnaissance rock chip sampling was carried out at Chimutu and two prospective graphite prospects identified from mapping, referred to as “Chimutu East” and “Katengeza”.

A total of 121 rock chip samples were collected, 95 from the Chimutu and Chimutu East Prospects and a further 26 from the Katengeza Prospect.

By the end of the December Quarter, 27 assays had been returned of which 13 assayed greater than 10% TGC, with a highest assay of 21.1% TGC.

During the March 2015 Quarter, the remaining 94 assays were received; 87 samples being from the Chimutu and Chimutu East Prospects and 7 being from the Katengeza Prospect. 36 of these samples assayed greater than 10% TGC, with a highest assay of 20.7% TGC.

These results were released by Globe as part of an ASX announcement dated 12 February 2015 titled “Chiziro Graphite Project Update”.

Table 1 below summarises the assay results received to date for all sampling programs completed to date.

Assay Range (% TGC)	Number of Samples Katengeza	Number of Samples Chimutu & Chimutu East
0-2	1	2
2-5	2	16
5-10	9	74
10-20	14	61
>20	1	7
Total	27	160

Table 1: Summary of rock chip TGC assay results received at Katengeza Project and the Chimutu and Chimutu East Projects.

All assays have now been received for the sampling programs completed to date.

Figures 2 and 3 below summarise the rock chip sample locations and TGC assays.

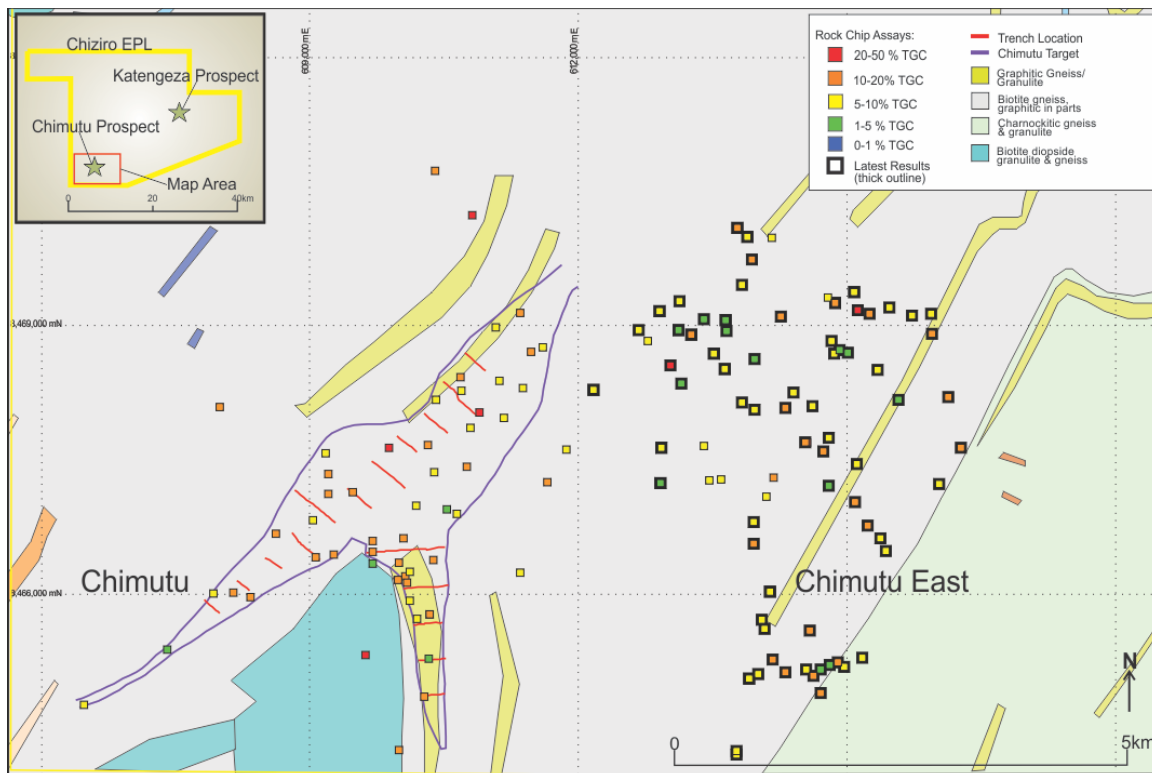


Figure 2: Chimutu and Chimutu East Prospect rock chip results. Assays received during the March Quarter are highlighted with a thick black outline.

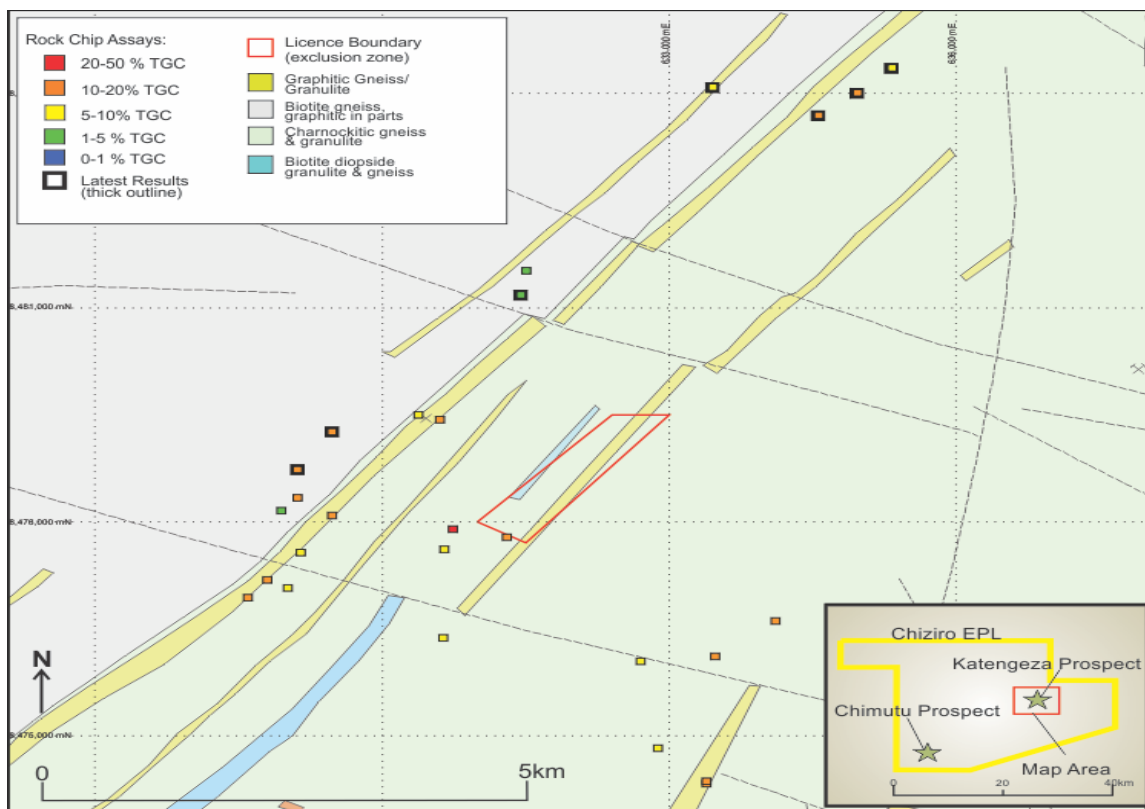


Figure 3: Katengeza Prospect rock chip results. Assays received during the March Quarter are highlighted with a thick black outline.

3.3 Chiziro Exploration Activities During This Quarter

No field work was completed during the March Quarter at Chiziro.

4. Machinga Rare Earths Project

4.1 Overview

Located just north of Zomba in southern Malawi, Machinga is host to rare earth, niobium and tantalum mineralisation. Globe's soil sampling programmes in 2013 and 2014 have outlined a substantial rare earth element (REE) and niobium anomaly that will require further follow up.

4.2 Activities During this Quarter

No exploration activities were completed at Machinga during the March Quarter.

5. Salimbidwe Rare Earths Project

5.1 Overview

The Salambidwe ring complex is located in southern Malawi, within the Chilwa Alkaline Province, and is host to rare earth mineralisation. Globe has carried out geological mapping, soil and rock chip sampling and ground radiometric surveys with promising results.

5.2 Activities During this Quarter

No exploration activities were completed at Salimbidwe during the March Quarter.

6. Memba Iron Ore Project

6.1 Overview

The Memba licence is located in north-east Mozambique, the area is prospective for Ti-Fe mineralisation. This project is the only one Globe has in Mozambique, and outside of Malawi.

6.2 Activities During this Quarter

No exploration activities were completed at Memba during the March Quarter.

7. Corporate

7.1 Cash at Bank

Cash at bank for the Company remains robust with A\$16.451M at bank on call or in term deposit.

7.2 Options

During the March 2015 Quarter, 3,800,000 option lapsed.

As a consequence the options remaining on issue are as follows:

Grant Date	Number	Exercise Price	Expiry Date
2 July 2013	1,000,000	\$0.10	30 June 2017
2 July 2013	1,000,000	\$0.15	30 June 2018
2 July 2013	1,000,000	\$0.20	30 June 2019
2 July 2013	1,000,000	\$0.25	30 June 2020
Total	4,000,000		

8. Schedule of Mineral Tenements as at 31 March 2015

Table 2: Summary of Globe's Exploration Tenements

	Project	Status	Tenement	Interest held by Globe
Malawi	Kanyika	Granted	EPL0188-2005R3	100%
	Salambidwe	Granted	EPL0289/10R	100%
	Machinga	Granted	EPL0230/07R2	100%
	Chiziro	Granted	EPL0299/10R	100%
Mozambique	Memba	Granted	4832L, 4831L	100%

NB:

- EPL – Exclusive Prospecting Licence (Malawi)
- L – Exclusive Prospecting Licence (Mozambique)

Contact:

Alistair Stephens

Managing Director

Globe Metals & Mining Ltd

Tel: +61 (0) 8 9327 0700

Competent person: The contents of this report relating to the Mineral resource Estimate are based on information compiled by Mr Michael Job, Fellow of the Australasian Institute of Mining and Metallurgy, and a consultant employed by Quantitative Group at the time the Mineral Resource Estimate was completed. Mr Job had sufficient experience related to the activity undertaken to qualify as a “Competent person”, as defined in the 2004 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves and consented to the inclusion in reports of matters compiled by him in the form and context which they appear. The Mineral Resource Estimate was first reported to the ASX on 7 January 2013 and has not been updated since.

Competent person: The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Fergus Jockel, a competent person who is a Member of The Australasian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists. Fergus Jockel is a full-time employee of the company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’. Fergus Jockel consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

JORC TABLE 1

Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	- Ground radiometric surveys were conducted using a handheld ThermoScientific RadEye brand scintillometer integrated with a GPS (GARMIN GPSMAP 78s). Soil sampling was carried out in a grid pattern with approximately 2 kg samples collected at each point. Rock chip samples were collected where outcropping rock occurs. Trenches were dug to the depth of bedrock, or 1.5m and 2kg samples were taken over a 1m length. - Careful bagging of samples in individual plastic bags and accurate numbering and labelling of samples was carried out in the field. QAQC procedures such as the use of field duplicates, were carried out to ensure sample representivity. Re-sampling was carried out where necessary. Hand held GPS units (GARMIN GPSMAP 78s) were used to locate sampling locations, which undergo regular checks. Hand held ThermoScientific RadEye brand scintillometer is regularly calibrated. - For graphite analysis at the Chiziro project, trenching was carried out to obtain 1m samples of 2kg each, soil sampling was carried out to obtain 2kg samples over a grid pattern, and rock chip sampling of outcrops was carried out. Samples were pulverised, acidified and roasted for total combustion analysis of total graphitic carbon. For all analysis at Kanyika, Machinga and Salambidwe projects, soil sampling was carried out to obtain 2kg samples over a grid pattern, and rock chip sampling of outcrops was carried out. The samples were pulverised and 120-150g was analysed by the ICP-MS technique.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	No drilling was carried out in this quarter

Criteria	Explanation	Commentary
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• No drilling was carried out in this quarter
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• No drilling was carried out in this quarter. Trenching was geologically logged over 1m length intervals to an appropriate level of detail. • Geological logging of trenching was qualitative in nature. • The entire length of all trenches was logged.
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• No drill core • Samples greater than 3kg were riffle split in to two 50/50 samples by the laboratory to create a sub-sample that can be milled in one operation. Samples were dried at 121 °C for 8 hours, until devoid of moisture, by the laboratory. • Samples from Kanyika, Salambidwe, and Machinga were submitted at the ISO 17025 accredited Genalysis Laboratory Services in South Africa for sample preparation. Samples from Chiziro were submitted at the SANAS accredited laboratory, Inspectorate Metals and Minerals, a Bureau Veritas Group company in Rustenburg, South Africa, for sample preparation. – At Genalysis Laboratories, samples were received by the laboratory and allocated a unique job number, then sorted. The samples were dried, and then crushed if required to either 2mm or 10mm as appropriate. Large samples were riffle split and the excess stored. Samples were pulverised in a closed pulveriser to 85% 75µm. 120-150g analytical split was taken for export to Australia and the pulp residue was retained and stored. – At Bureau Veritas Laboratory, samples were received, sorted and dried.

Criteria	Explanation	Commentary
		Primary preparation was by crushing the whole sample, which was then pulverised in a vibrating disc pulveriser. The samples were acidified and roasted to remove carbonate and organic carbon. • Appropriate industry standard quality control procedures were adopted at each stage of sub-sampling to maximise representivity of samples, such as laboratory repeat assays. • Field duplicates were used at a rate of 5% and analysed to ensure representivity of in situ material. • The field sample size of approximately 2kg greater is appropriate to the grain size of the material sampled.
Quality of assay data and laboratory tests	• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	• Samples from Kanyika, Salambidwe, and Machinga were submitted at the ISO 17025 accredited Genalysis Laboratory Services in South Africa for sample preparation and chemical analysis, applying the ICP-MS technique. Samples from Chiziro were submitted at the SANAS accredited laboratory, Inspectorate Metals and Minerals, a Bureau Veritas Group company in Rustenburg, South Africa, for sample preparation and chemical analysis using a total combustion analyser. • A Thermo Scientific RadEye brand scintillometer was used to measure ground radiation levels and conduct surveys. The unit is regularly checked and calibrated. A calibration factor was not applied to the radiation counts per second data. • A comprehensive quality control and quality assurance programme undertaken included the use of certified reference materials (CRMs), blanks (silica sand) and field duplicates at a 5% rate. The quality assurance data was analysed on an on-going basis. Re-assaying or umpire checks were undertaken as necessary. From the QAQC data review, it is reasonable to accept the levels of accuracy and precision were attained during the exploration program and laboratory testing.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i>	• No drilling was carried out in this quarter therefore there were no significant intersections. • No drilling was carried out in this quarter,

Criteria	Explanation	Commentary
	- Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	therefore no twinned holes. - The collected field data was entered by the Exploration geologists into Excel spread sheets and emailed to the GIS and Database Geologist based at Globe Metals head office in Perth. All data was verified by the GIS and Database Geologist in Perth, and automatically verified by database software. Data entry errors were identified and returned to the Exploration Geologists for correction. The data was loaded into a Century Systems Fusion Database. - Assay results were received by the Perth Office, directly from Genalysis Laboratories by email. The assay files were loaded into the database by the GIS and Database Geologist. A spread sheet containing assay data was sent to the Exploration Geologists on site for their evaluation.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- Hand held GPS units (GARMIN GPSMAP 78s) are used to define field location of soil, rock chip samples, trenches and boreholes. These locations are considered accurate to 5m. - The grid system used is UTM Zone 36S, WGS 84. - The GPS has sufficient topographic control warranted for geochemical sampling. GPS data is downloaded via Map Source into MS Excel.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- No drilling was carried out in this quarter. Soil sampling was carried out on a grid pattern, where terrain allows, at a line spacing of 200m and station spacing of 50m. Rock chip samples were taken only where outcrops occur. Trenches were sampled over 1m length intervals. - The data spacing and distribution of surface sampling is sufficient to delineate a mineralised target for further investigation. - No sample compositing was applied.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if	No drilling was carried out in this quarter

Criteria	Explanation	Commentary
	<i>material.</i>	
Sample security	<i>The measures taken to ensure sample security.</i>	Samples were collected from the Lilongwe office in Malawi by MANICA (freight company in Malawi) transport, who provide a secure service. Samples were delivered to Genalysis Laboratory in Johannesburg South Africa and securely stored. Chain of custody was overseen by the Geology Manager.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Sampling techniques undergo regular review and improvements are made where necessary. No problematic sampling issues have been highlighted. Data undergoes regular review and auditing, along with QAQC checks. No problematic data issues have been highlighted.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	- Exploration was conducted within several licences in Malawi, there are: - Kanyika EPL0188/07R3 which is 100% held by Globe Metals and Mining Ltd, and covers an area of 607 km². - Chiziro EPL0299/10 which is 100% held by Globe Metals and Mining Ltd, and covers an area of 2052.76 km², with a small government exclusion zone of 1.14 km². - Machinga EPL0230/07R2 which is 100% held by Globe Metals and Mining Ltd, and covers an area 367.37 km². - Salambidwe EPL0289/10R which is 100% held by Globe Metals and Mining Ltd, and covers an area 678.5 km². - All licences are in good standing and no known impediments exist.

Criteria	Explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Kanyika: Regional geological mapping was carried out by the Geological Survey Department of Malawi from 1967. An airborne magnetic and radiometric survey was carried out in 1984-85 by Hunting Geology and Geophysics Limited and interpreted by Paterson, Grant & Watson Limited ('PGW') for a United Nations sponsored Development Program. The Kanyika target was identified. In 1986 the Malawi Geological Survey conducted brief follow-up ground reconnaissance programs. However, in 1987 it was concluded in an internal Geological Survey Department report that the results were not encouraging. Machinga: The American Smelting and Refining Company and the Atomic Energy Division of the Geological Survey of Britain carried out preliminary geological work in 1955 (scintillometer survey, mapping, trenching, drilling). Radiometric anomalies were found but none of the generated data was made available to Globe Metals. Detailed geological mapping over the Malosa-Zomba mountains were completed by Bloomfield et al in 1965. In 1986, an airborne magnetic and radiometric survey was carried out by Hunting Geology and Geophysics Limited and interpreted by Paterson, Grant & Watson Limited ('PGW') in 1987 for a United Nations sponsored Development Program. It located Uranium channel radiometric anomalies in the region. In November 2009 Resource Star Limited completed an orientation soil sampling program over Machinga Main Anomaly, 136 samples were collected. Chiziro: The Geological Survey Department of Malawi conducted geological mapping and Cooper et al. identified the Chimutu and Katengeza targets in a 1949 Annual report. Trenching and pitting was carried out by the Geological Survey Department in 1963, and indicated 15200 short tonnes of graphite to a depth of 6 feet, averaging 5.1% Graphite in weathered gneiss, in a zone 200 yards wide by 2300 feet in length. This trenching is within the exclusion

Criteria	Explanation	Commentary
		zone of the Chiziro licence and not currently available for exploration by Globe. Salambidwe: In 1963 The Geological Survey Department of Malawi mapped the "Geology of the Salambidwe Ring Structure". This mapping was digitised for use by Globe. In 1986, an airborne magnetic and radiometric survey was carried out by Hunting Geology and Geophysics Limited and interpreted by Paterson, Grant & Watson Limited ('PGW') in 1987 for a United Nations sponsored Development Program. It located radiometric anomalies in the region.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Kanyika: The licence lies within the Malawi Province of the Mozambique Orogenic Belt. It is almost entirely underlain by Precambrian and Lower Palaeozoic Basement Complex, predominantly gneissic metamorphic rocks. Most of the rocks in the region are paragneisses originating from variable protoliths including pelites, sandstones and limestones. Several granitoid bodies of variable size have intruded the gneissic basement and may have originated wholly or in part by anatexis. A few small concordant bodies of alkaline syenitic rocks carrying nepheline are also present, including the strike-extensive body which hosts the Kanyika Nb-Ta-U-Zr deposit. Machinga: The licence area is dominated by rocks of the Mesozoic Chilwa Alkaline Province (granite, syenite and nepheline-syenite plutons and have associated volcanic vents characterised by carbonatite and agglomerate). The Malosa Pluton consists of a heterogeneous mixture of syenitic and granitic rocks. The REE-Nb-Ta mineralisation at Machinga is associated with the eastern margin of the Malosa Pluton of Chilwa Alkaline Province age. Uranium and thorium anomalies are also associated with the REE-Nb-Ta mineralisation. Chiziro: The licence area is underlain by gneisses, schists and granulites which belong to the Basement Complex, and forming part of the Malawi Province of

Criteria	Explanation	Commentary
		the Mozambique belt. Graphitic granulites and graphitic schists have been mapped throughout the licence area. This basement package was intruded by pegmatite bodies (dykes and sills). Metamorphosed mafic and ultramafic rocks have been observed in very few areas. Field evidence has supported that the basement rocks were subjected to upper amphibolite metamorphism as well as granulite facies conditions in several locations. In some areas the rocks are well exposed but for the most part they are covered by thick surficial deposits including residual soils, alluvium and colluvium. The basement rocks are complexly deformed but the pegmatite bodies are massive and undeformed. Salambidwe: The Salambidwe ring complex is dominated by Karoo-aged sedimentary units (carbonaceous shale, arkose, sandstone and mudstone). Carbonatite and associated alkaline rocks (syenite, pyroclastics, nephelinite and phonolite plugs, alkaline dykes, dolerite and granophyre dykes) form part of the Chilwa Alkaline Province. The Mount Salambidwe complex is a 6 km ring structure, emplaced along faults related to the East African Rift valley during the Cretaceous. Altered metasediments surround the ring and the structure is characterised by an outer ring of nepheline syenite with an inner core of agglomerate.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this</i>	No drilling was carried out in this quarter

Criteria	Explanation	Commentary
	<i>exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• No drilling was carried out in this quarter
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• No drilling was carried out in this quarter
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Appropriate maps and diagrams are included in the preceding report.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• Reporting of results in this report is considered balanced. • All results have been reported
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating	• All meaningful and material exploration data has been reported.

Criteria	Explanation	Commentary
	<i>substances.</i>	
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Planned further work includes follow up or reported results.