

Aircore Scout Drilling Opens Elizabeth Hill Near Mine and Regional Silver Opportunities

Highlights

- Assay results from 76 scout aircore (AC) drill holes for 1,060m completed in December 2025 returned significant results extending silver mineralisation away from historic Elizabeth Hill mine workings and previous drilling (table below).
- Mineralization was **extended up to 150m along strike** pof Elizabeth Hill *(Elizabeth Hill North)* and confirmed well to the south along the Munni Munni fault *(Elizabeth Hill South)*.
- Scout AC drilling is to shallow depths only (depth of refusal) with **positive results near surface having potential to be indicative of deeper significant silver mineralization**.
- **24m @ 28g/t Ag from surface (25WCAC001)** at *Elizabeth Hill North*.
  - The hole is located 10m west of diamond hole 25WCDD019 reporting 22.0m @ 578g/t Ag from 6m down hole.
- **2□5m @ 80g/t Ag from 1m of surface** (**25WCAC003** at *Elizabeth Hill North*, including
  - ***1m @ 124g/t Ag*** *from 1m of surface.*
- **3m @ 787g/t Ag from 1m of surface** (**25WCAC005)** at *Elizabeth Hill North*, including
  - ***1m @ 2,340g/t Ag*** *from 1m of surface.*
- **4m @ 88g/t Ag from surface** (**25WCAC026)** at *Elizabeth Hill North*, including
  - ***1m @ 148g/t Ag*** *from surface.*
- **2m @ 39g/t Ag from 12m (25WCAC071)** *at Elizabeth Hill South,* on the ultramafic/granite contact, confirming mineralization well south of Elizabeth Hill.
- Mineralisation **considered to be mainly associated with ultramafic rocks is found hosted within granite to the north of Elizabeth Hill**, opening new areas for exploration.
- AC scout drilling at *Natalie Hill South,* on a separate mineralized trend to *Elizabeth Hill,* intersected disseminated base metal sulphides (nickel, copper, cobalt) confirming and expanding historical drilling in the area and opening up a **new area for exploration**.
- Silver mineralisation has now been confirmed to extend beyond the known mine area.
- **A reverse circulation (RC) drill rig will in Q1 be mobilized to test the extent, grade and depth of shallow near mine AC drilling results at Elizabeth Hill North, with results to be included in an open pit resource and scoping study**.

Hole ID	From (m)	Length (m)	Ag (g/t)
25WCAC001	**2**	**24**	**28**
25WCAC002	2	3	14
25WCAC002	12	12	21
25WCAC003	**1**	**2.5**	**80**
includes	**1**	**1**	**124**
25WCAC004	1	2.5	10
25WCAC005	**1**	**3**	**787**
includes	**1**	**1**	**2,340**
25WCAC006	1	1	26
25WCAC008	8	0.5	61
25WCAC025	**1**	**5**	**55**
includes	**2**	**1**	**190**
25WCAC026	**0**	**4**	**88**
includes	**0**	**1**	**148**
25WCAC071	12	2	39

West Coast Silver Limited (ASX: WCE) ('West Coast Silver' or the 'Company') is pleased to advise assay results to have been received for the aircore drill program (76 aircore drill holes for 1,060m completed in December 2025) at the Elizabeth Hill Joint Venture Project (WCE 70%, Alien Metals 30%) (**Elizabeth Hill**) near Karratha, Pilbara region of Western Australia (Figures 1 and 5).

Executive Director Bruce Garlick commented:

The Board is highly encouraged by the outcomes of the recent shallow aircore scout drilling program at Elizabeth Hill near mine, along trend and regionally. ***The identification of multiple near-surface, high-grade silver intersections highlights Elizabeth Hill being an undervalued and underexplored property with confirmed growth opportunities through further exploration and development.***

The extension of high-grade mineralisation beyond the previously drilled area in 2025 is of considerable importance to value creation (refer ASX announcement 4th February 2026). The identification of high-grade silver in multiple shallow aircore holes to the north and northwest highlights potential for the mineralised system to extend significantly beyond current drilling. This clearly demonstrates that the Elizabeth Hill trend remains open for further exploration.

The intersection of mineralisation within granite supports the ***prospectivity of further granite hosted mineralisation****. This opens the prospectivity beyond one rock type hosting mineralization.*

The mineralized intersection at Elizabeth Hill South confirms historic silver intersections by previous explorers. Similarly, AC nickel and copper intersections at Natalie Hill support earlier historic drilling. The AC drilling in these areas opens-up Elizabeth Hill to being potentially just one part of a bigger mineralization story with opportunities for new silver and base metals occurrences regionally. ***The latest drilling has increased confidence in the scale potential of the silver mineralised system at Elizabeth Hill****.*

The Board looks forward to updating shareholders as the Company advances the Project ***through the next phase of exploration in 2026 focussing on a disciplined program of developing the near surface and depth potential at Elizabeth Hill; extensions along strike; as well as testing the region for more high value silver targets.***

DRILLING RESULTS

Elizabeth Hill North

The entire aircore hole **25WAC001** was mineralised with **24m @ 28g/t Ag from 2m** (note that 0-2m was not sampled, as the hole was collared on a pad made from historical mine material). The hole is collared 10m west of **25WCDD019 (22m @ 578g/t Ag from 6m**), opening a structural corridor to the north-northwest, entirely hosted in granite, and potentially related to a splay or flexure in the Munni Munni Fault (Figures 1, 2 and 6; Table 1).

25WCDD005 intersected **3m @ 787g/t Ag from 1m including 1m @ 2,340g/t Ag** from 1m (note that 0-1m was excluded due to possible surface contamination) reflecting the tenor of mineralisation continuing to the north. Mineralisation in this interval is hosted in strongly oxidised and chlorite altered granite containing disseminated fine-grained sulphides (1-2m) and quartz veins (Figures 1, 2 and 8).

Drill hole **25WCDD025** intersected **5m @ 55g/t Ag from 1m** and contained gossan-like material from 5m to the end of hole at 8m (Figures 1, 2 and 8; Table 1). The gossan-like material contained **3m @ 1,492ppm Pb and 3m @ 344ppm Zn from 5m**. Anomalous Pb and Zn are known to be associated with, and adjacent to, silver mineralisation at the Elizabeth Hill Silver Mine.

Drill hole **25WCDD026** intersected **4m @ 88g/t Ag from surface** in weathered and chlorite-altered granite hosting quartz-carbonate veins (<1mm thick) and increasing silicification at the bottom of hole from 3.5-4m (Figures 1, 2 and 9; Table 1). The silver intersection is supported by **1m @ 1,635ppm Co** from surface which is known to be associated with high-grade silver mineralisation at the Elizabth Hill Silver Mine. Silver intersections in drill holes 25WCAC025 (Figure 8) and 25WCAC026 are 20m apart, demonstrating the continuity of the mineralisation corridor north of the Elizabeth Hill Silver Mine.

Mineralisation intersected in **25WCAC008 (0.5m @ 61g/t Ag from 8m)**, located 225m north of the Elizabeth Hill mine on the northern extension of the Munni Munni Fault (Figures 1, 2 and 11; Table 1), is important for demonstrating the potential to the north of the historical workings.

Elizabeth Hill South

In addition, the intersection of **2m @ 39g/t Ag** from 12m in **25WCAC071** is encouraging for the potential of the Elizabeth Hill prospect (Figures 1, 3 and 13; Table 1), 275m to the south of Elizabeth Hill where historical mineralisation such as 2m @ 1,550g/t Ag from 108m in drill hole AMEHRC012 and 1m @ 250g/t Ag from 118m in drill hole AG43 point to the potential of this underexplored area.

Natalie Hill North

Drill holes 25WCAC057 and 25WCAC058 aimed to test the northern ultramafic rock/granite contact (Figure 1) and a geochemical silver anomaly at this contact. However, the drill holes did not intersect the contact due to challenging ground conditions. Further exploration with RC drill holes is required to test this contact and geochemical anomaly.

Natalie Hill South

Drill holes 25WCAC059 to 25WCAC062 targeted the eastern contact of ultramafic rock of the Munni Munni intrusive complex and granite to the east (Figures 1 and 4). Drill hole 25WCAC059 intersected chlorite altered pyroxenite and granite, and 25WCAC060 to 25WCAC062 remained in chlorite altered pyroxenite. Drill hole 25WCAC060 contained **1m @ 2,480ppm Ni, 2,010ppm Cu and 107ppm Co** from 11m related to fine-grained sulphide mineralisation.

Drill holes 25WCAC063 to 25WCAC065 tested a historical electromagnetic conductive anomaly (refer to East Coast Mineral N.L. ASX Announcement dated 30 April 2004) in chlorite altered pyroxenite with fine-grained sulphides associated with historically recognised platinum group element and base metal mineralisation in J Reef (refer to Alien Metals Ltd ASX Announcement dated 26 April 2023). Drill hole 25WCAC065 intersected **16m @ 1,888ppm Ni, 1,203ppm Cu and 127ppm Co** from 4m.

Drill hole 25WCAC066 tested outcropping carbonate veins within pyroxenite and intersected **24m @ 1,584ppm Ni, 1,001ppm Cu and 115ppm Co** from surface associated with fine-grained, disseminated sulphides in pyroxenite.

The sulphides intersected are consistent with previous reports of disseminated sulphide within the basal portion of the Munni Munni Complex intrusive stratigraphy in the area (refer to Alien Metals Ltd ASX Announcement dated 26 April 2023). The Company is assessing if a potential link exists between these base metal occurrences and silver mineralisation at Elizabeth Hill, as well as other potential exploration prospects for further hydrothermal mineralisation.

CONCLUSIONS AND DISCUSSION

The drilling has confirmed extensive high-grade silver mineralisation from surface and immediately to the north of the historical mine workings in an area that has been sparsely explored. Mineralisation now extends 150m north of the 2025 WCE diamond drilling and supports West Coast's interpretation that mineralisation continues to the north, regardless of whether the host rock is ultramafic or granite, and the Munni Munni Fault remains an important controlling feature (Figure 1).

The impressive aircore results from the 2025 drilling program provide confidence to expand exploration efforts at Elizabeth Hill North and Elizabeth Hill South, north and south of the historically mined area, respectively. The results extend the surface expression of high-grade silver mineralisation north of the mineralised envelope defined by the 2025 diamond drilling program (West Coast Silver ASX Announcement dated 4 February 2026).

The intersection in 25WCAC071 at Elizabeth Hill South is consistent with previous deeper silver intersections in historical drilling and opens areas for further exploration of the granite-ultramafic contact on the Munni Munni Fault in that location.

In addition, encouraging base metal sulphide intersections on the eastern side of the Munni Munni Complex at Natalie Hill to Natalie Hill South, offer encouragement for further exploration to investigate any link between such mineralisation and a broader hydrothermal mineralised system (including Elizabeth Hill) within the Project area.

Relevant cross sections are in Appendix 1.

Table 1: Summary of significant silver intercepts and geological description from aircore drilling

Hole ID	From	To	Interval	Ag (g/t)	Description
25WCAC001	2	26	24	28[1]	Highly altered granite/gneiss (faint gneissic fabrics) - chips of quartz carbonate veins and altered silicious/granitic veining throughout. Obvious quartz-carbonate veins at 6-7 m, 17-19 m, 20-21 m and 23-24 m.
25WCAC002	2	5	3	14[1]	Highly altered ultramafic with gossanous textures, poor recovery at 4-5 m. 12-24 m highly altered granite/gneiss with quartz-carbonate vein chips throughout.
25WCAC002	12	24	12	21	
25WCAC003	1	3.5	2.5	80[2]	Altered granite, quartz vein chips 1-3 m, below 4 m intensely silicified granite
includes	1	2	1	**124**	
25WCAC004	1	3.5	2.5	10[2]	Altered granite (chloritised biotite) with no apparent veining, 2-3 m: common pegmatitic chips and lesser granite than intervals above and below.
25WCAC005	1	4	3	**787**[1]	Quartz vein chips in 2-3 m.
includes	1	2	1	**2,340**	Altered granite (chloritised biotite) with disseminated sulphides
25WCAC006	1	2	1	26[2]	1-2m: fine chips, mostly altered granite with chloritised biotite, but with chips that are more leucocratic and less altered granite.
25WCAC008	8	8.5	0.5	61	2-3m: chlorite-altered gneiss and quartz feldspar pegmatite, 6-8.5m: indurated chlorite altered gneiss.
25WCAC025	1	6	5	**55**[2]	Intensely altered granite, some quartz veins and intensely silicified veins.
includes	2	3	1	**190**	
25WCAC026	0	4	4	88	Weathered granite with quartz-carbonate vein chip, 1-3 m: altered granite (chloritised biotite), becoming intensely silicified from ~3.5-4 m.
includes	0	1	1	**148**	
25WCAC071	12	14	2	39	Mostly altered (silicified and weakly chloritised pyroxenite), 13-14 m: bottom of hole sample has rare chips of granite – possible ultramafic contact.

Note: Lengths are down hole lengths not true widths; [1]0-2m not sampled due to possible contamination from surface material; [2]0-1m sample not used for calculation due to possible contamination from surface material; 10g/t Ag cut off for significant intercepts.

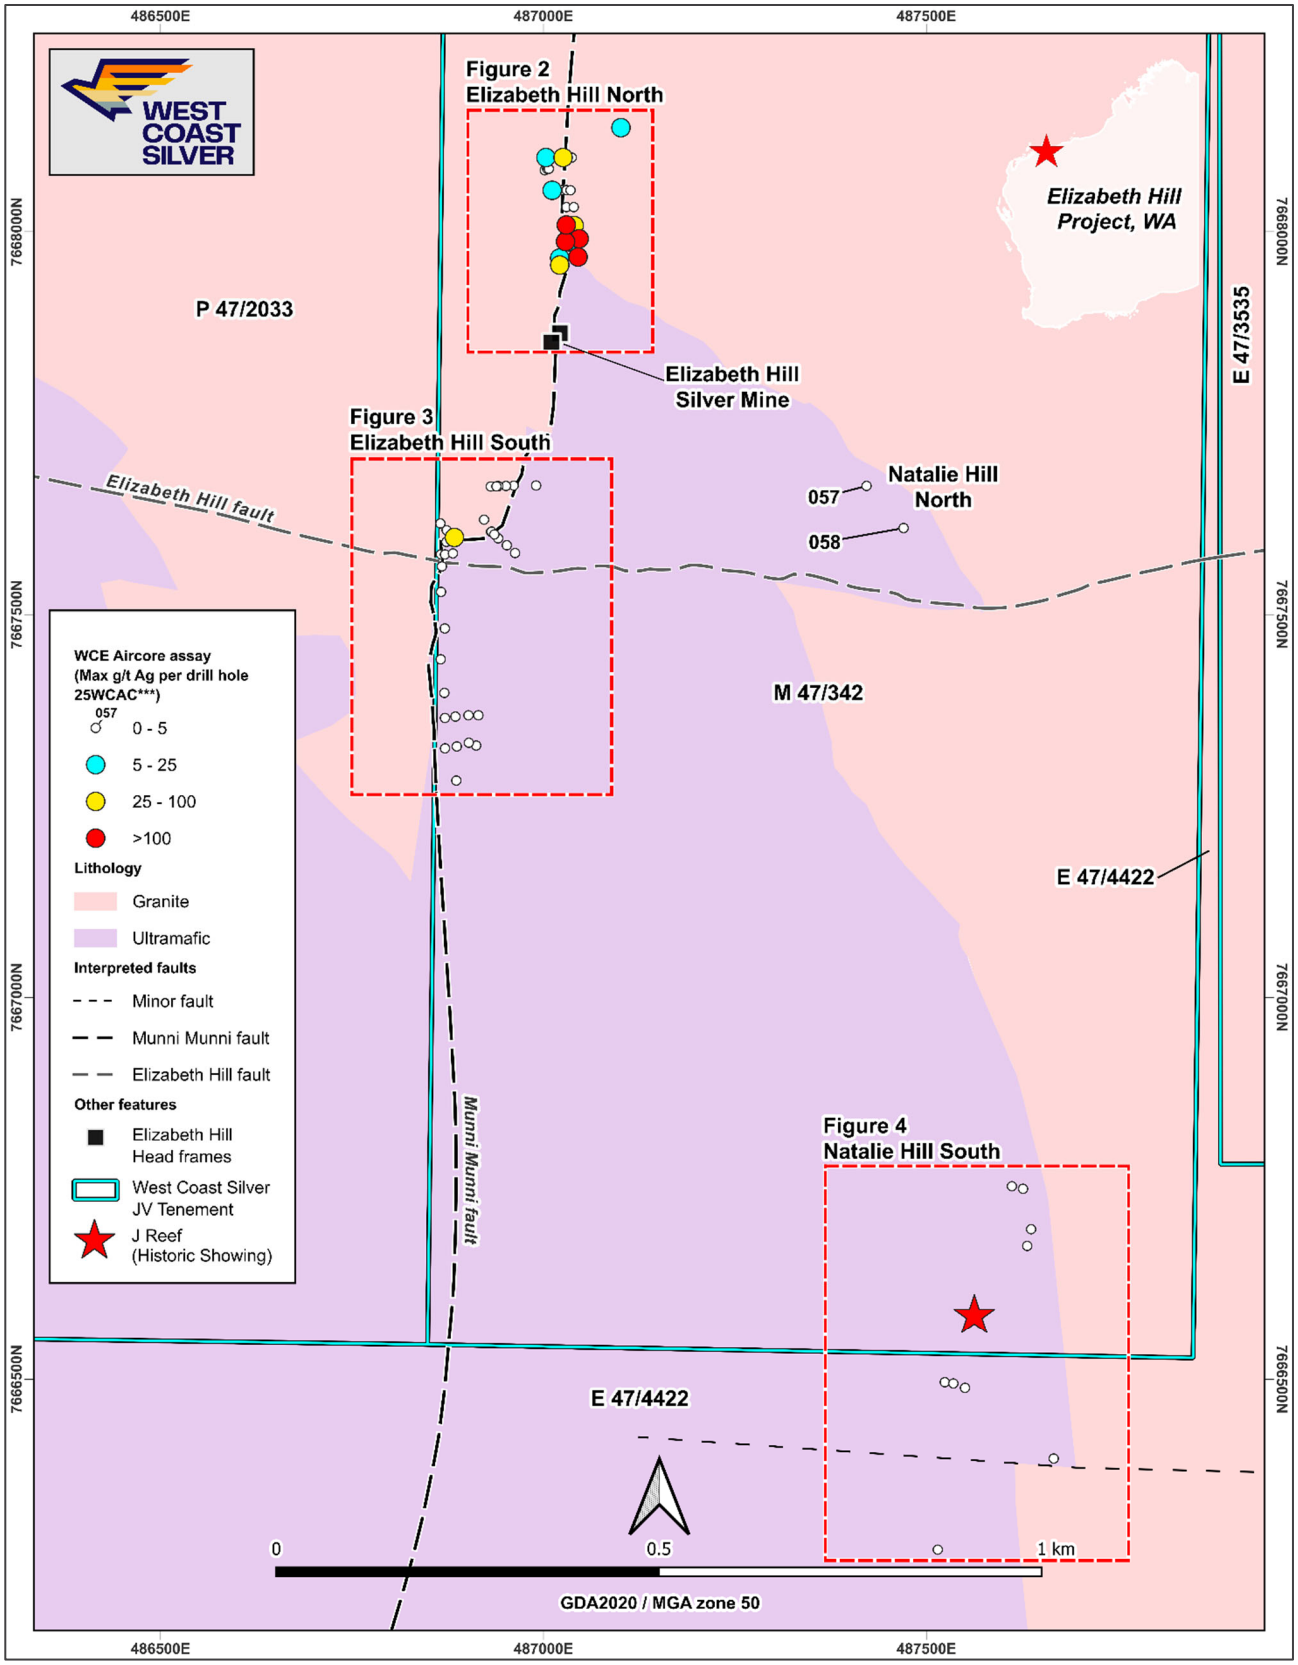


Figure 1: Location of 2025 aircore drill holes

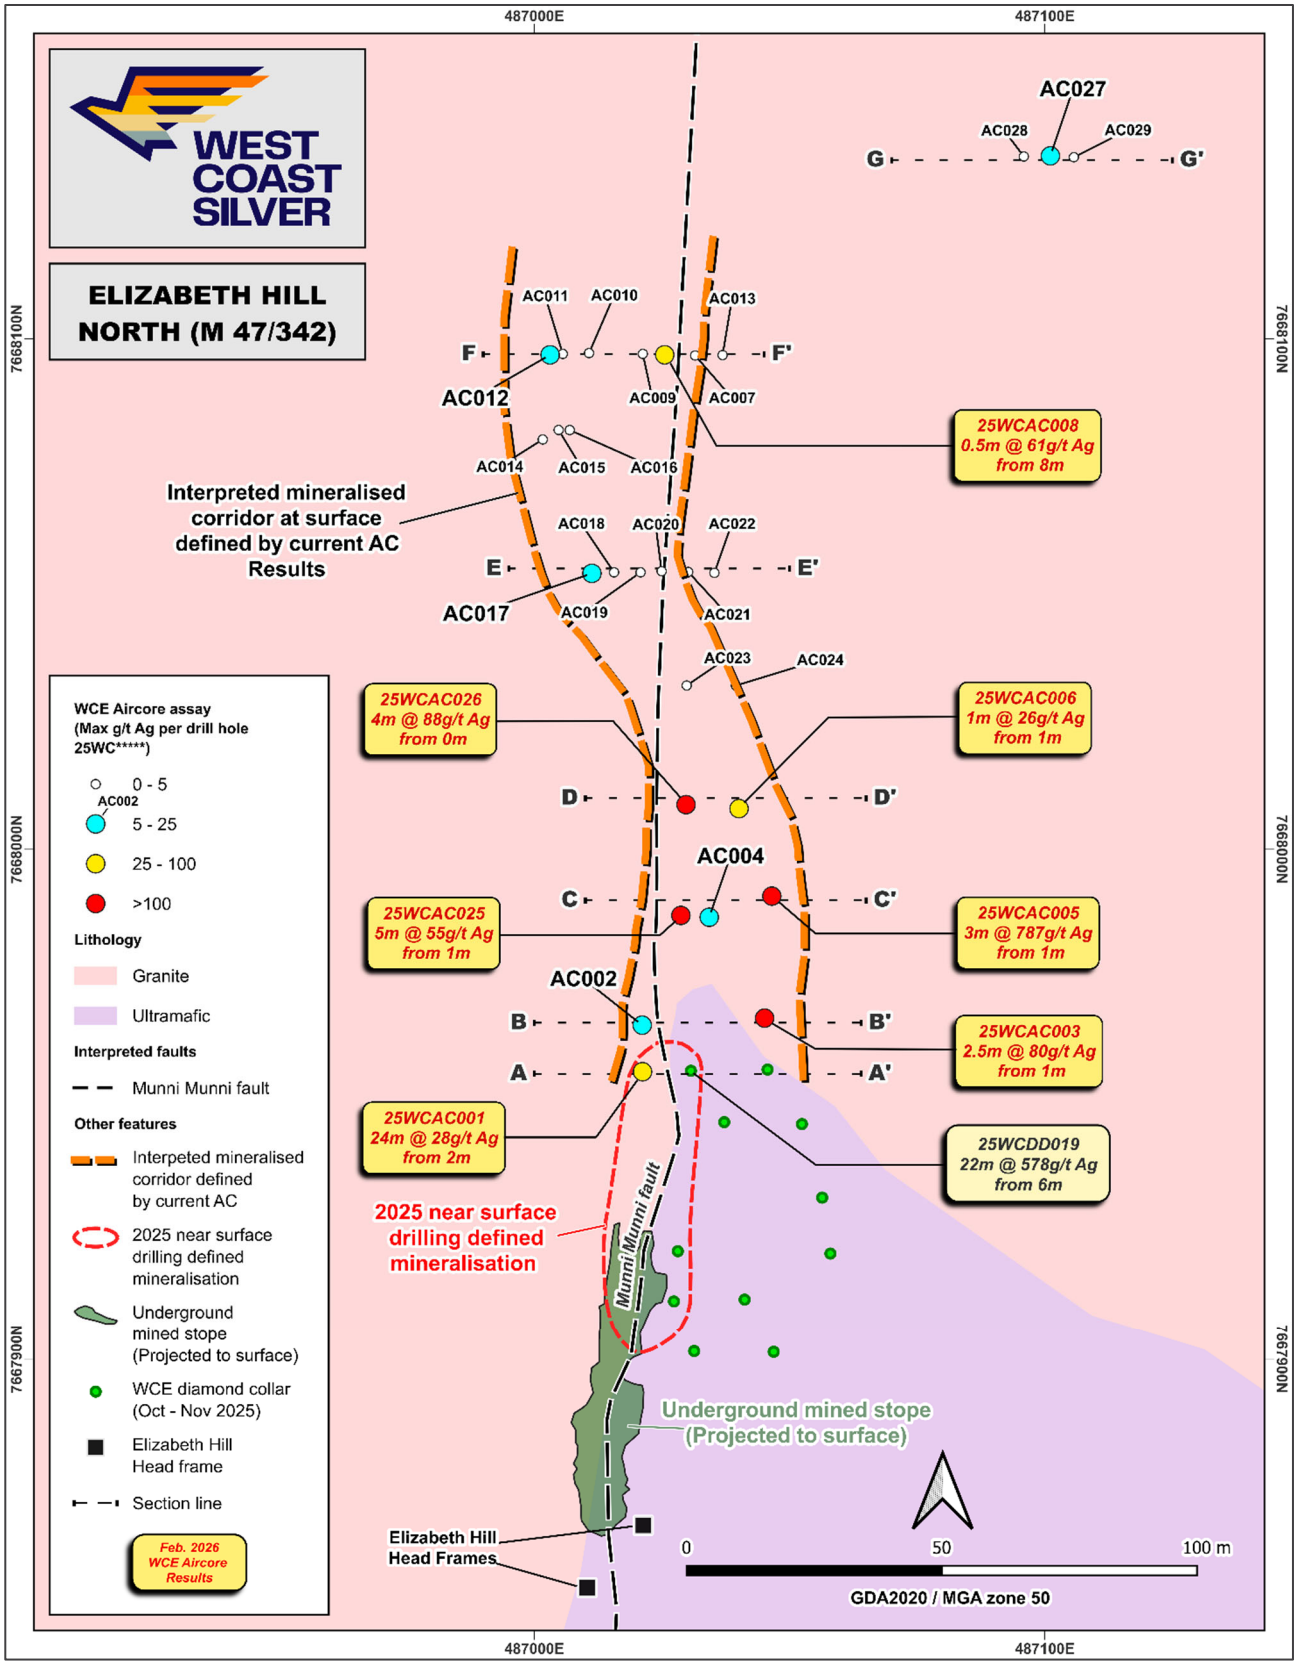


Figure 2: Location of 2025 aircore holes drilled at Elizabeth Hill North. Please note that drill hole 25WCAC001 intersected 24m @ 28 g/t tonne silver from surface, located approximately 10m from the previously reported hole 25WCDD019, which returned 22.0m at 578 g/t silver from 6m down-hole (Figure 6). Strong target for deeper follow-up RC drilling.

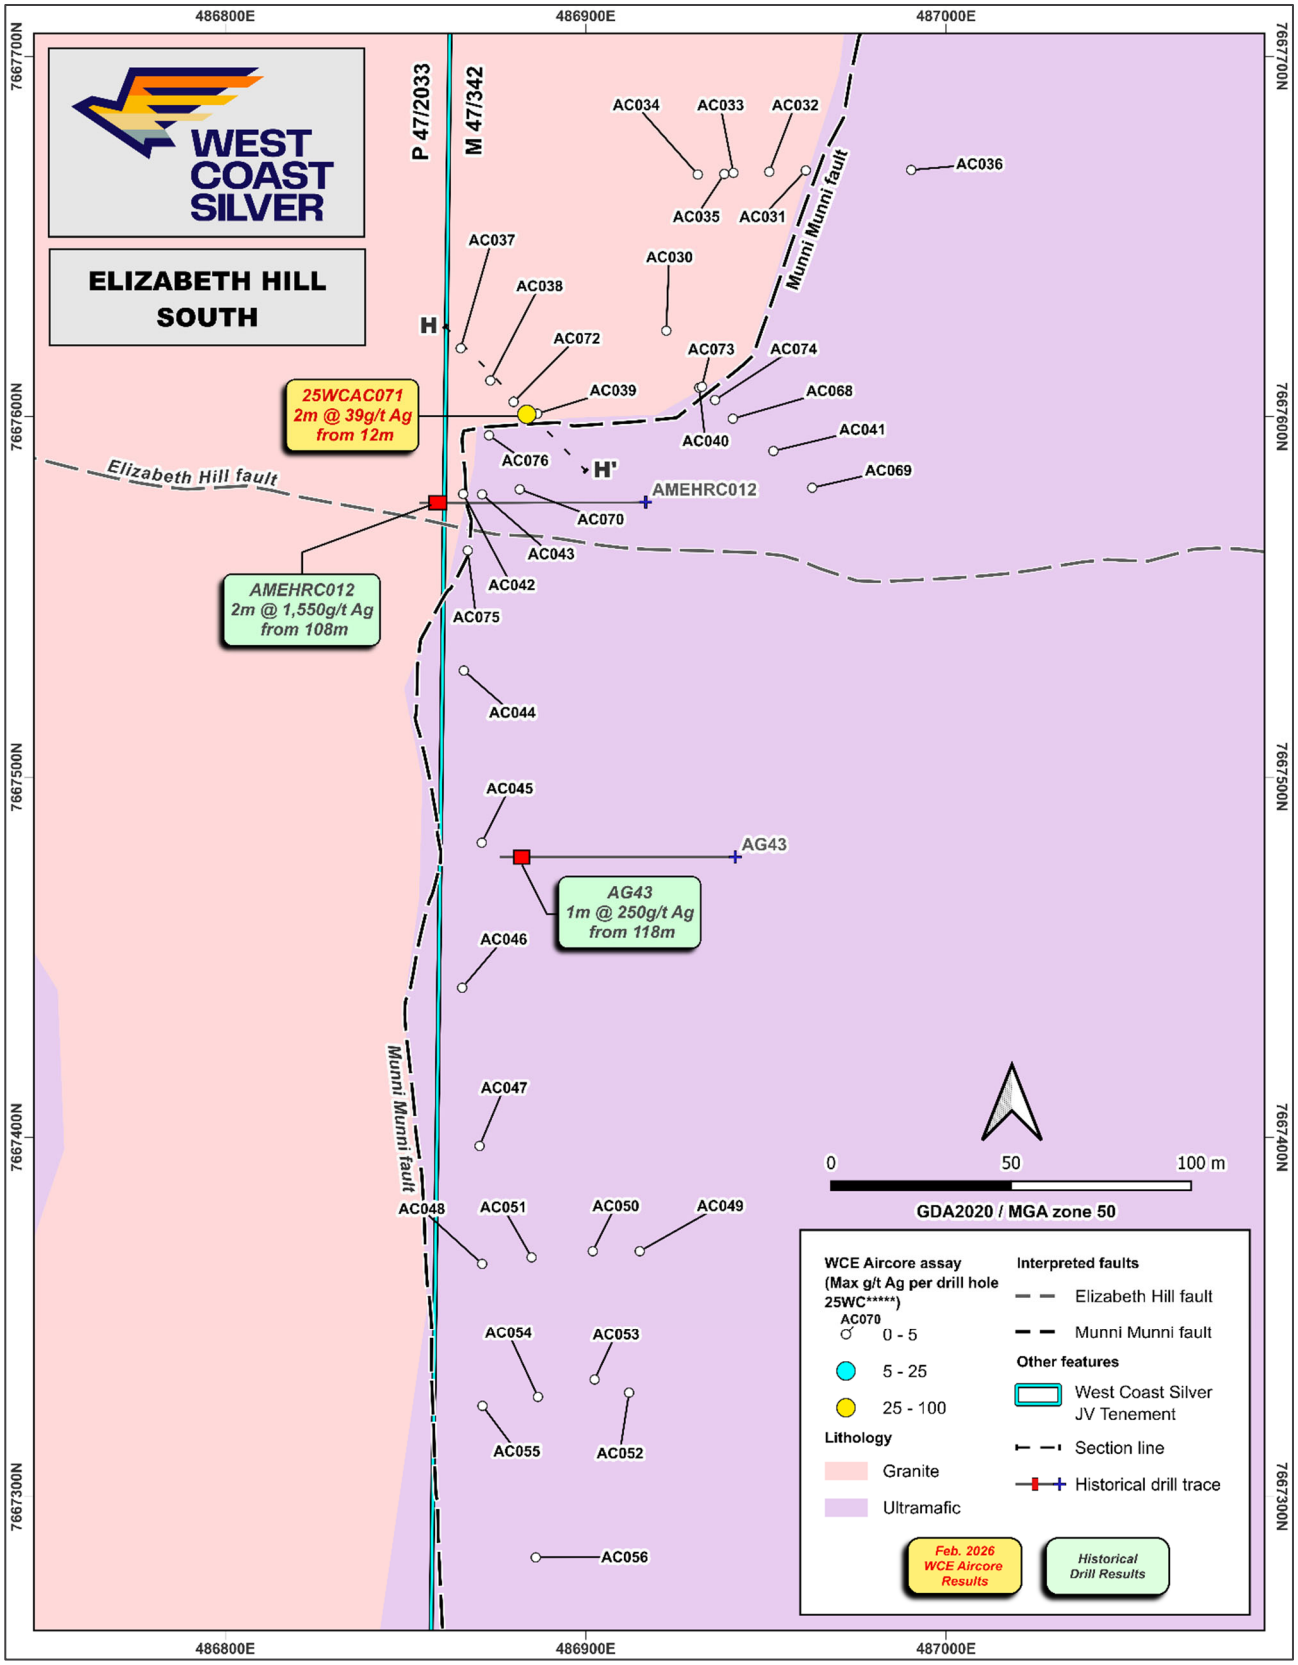


Figure 3: Location of 2025 aircore holes drilled at Elizabeth Hill South

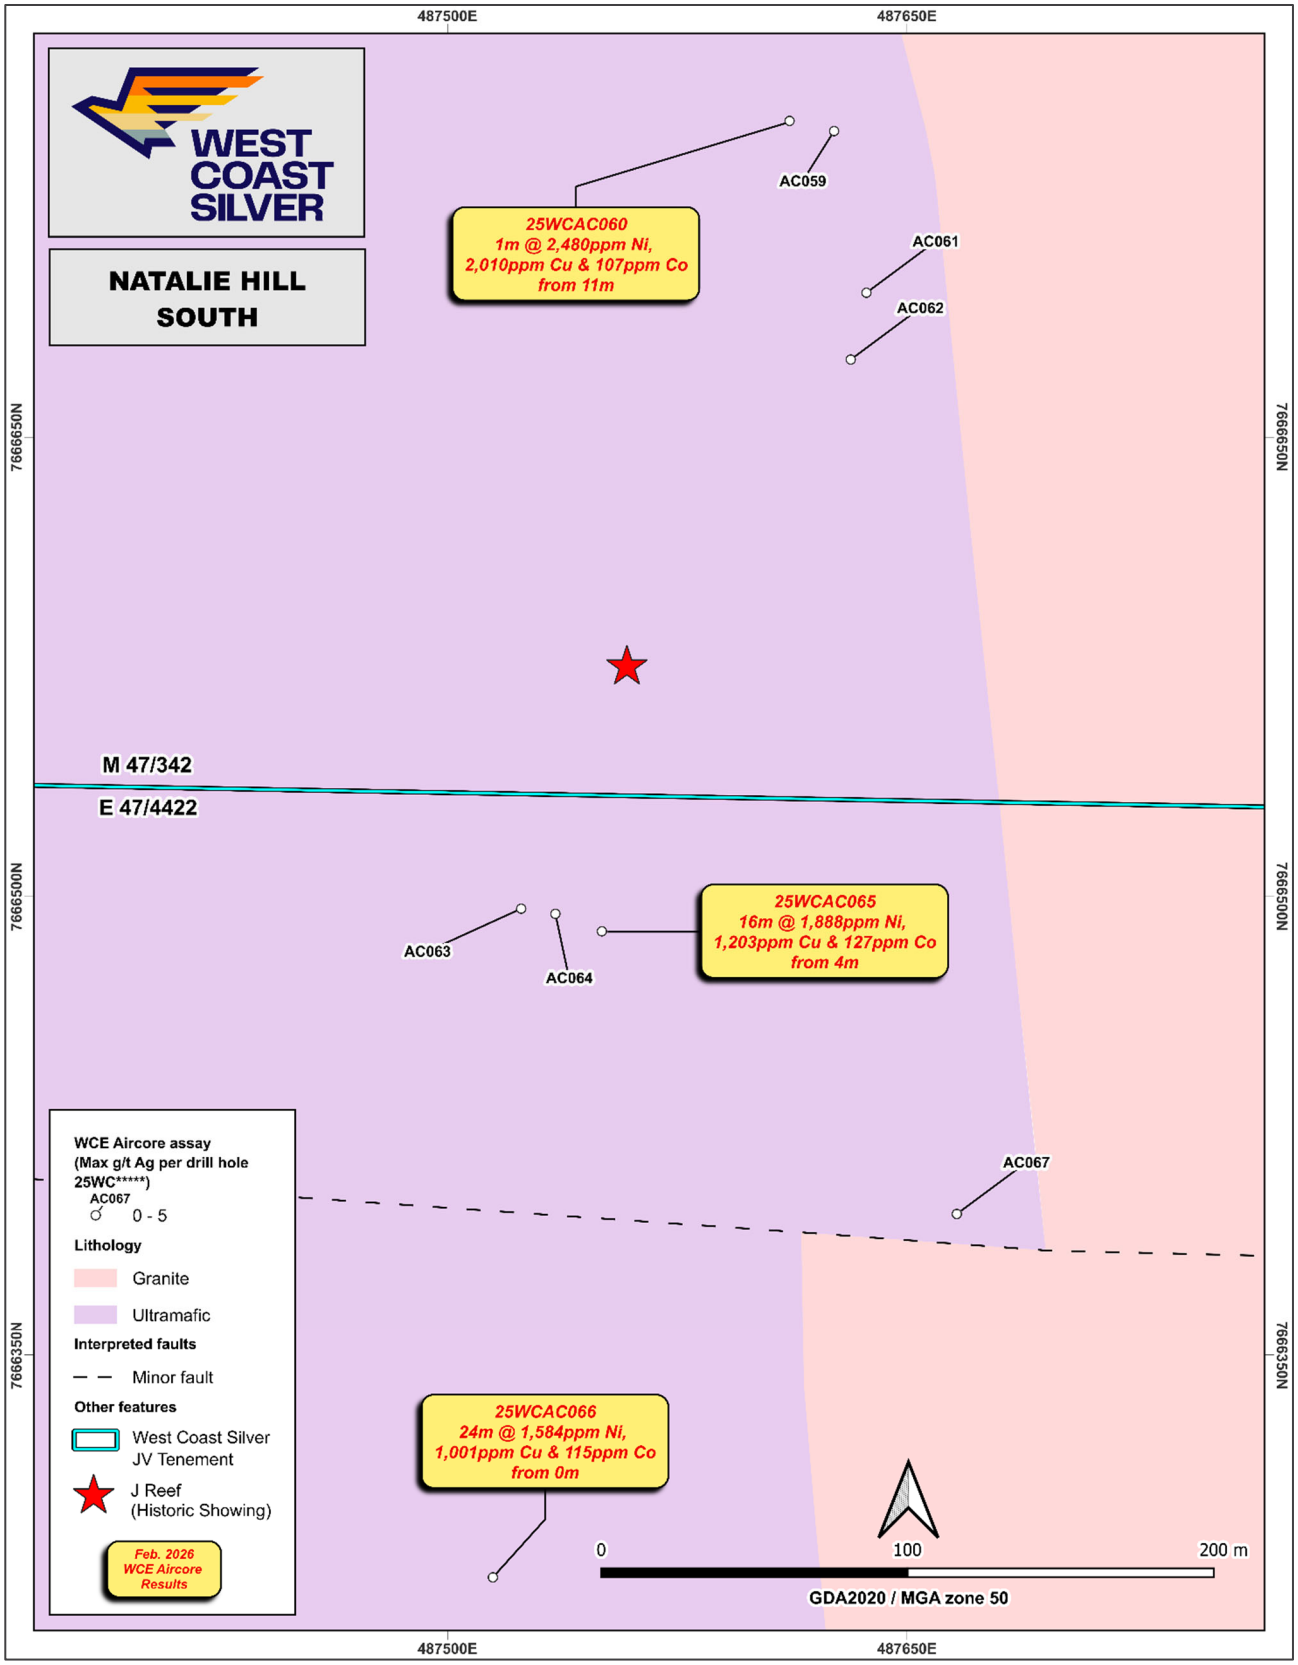


Figure 4: Location of 2025 aircore holes drilled at Natalie Hill South

NEXT STEPS

Following the high-grade results intersected in the 2025 diamond drilling programs (Phase 1 and 2), and now the impressive aircore results, the Company will continue to advance exploration at Elizabeth Hill with the mobilisation of a nearby RC rig to initially test the Elizabeth Hill North and Elizabeth Hill South prospects in the context of the activities outlined below.

- **Detailed geological and structural review** of all 2025 drilling data, including the interpreted change in strike and plunge of mineralisation, particularly newly identified targets in the northwest of the Elizabeth Hill Project. Planning of follow-up drilling, subject to results and approvals, targeting near-surface and near-mine extensions of known mineralisation.
- **Further drilling** targeting:
  - extensions of high-grade mineralisation along strike and at depth;
  - near-mine targets adjacent to historical workings;
  - priority targets identified from aircore drilling and the new geological reinterpretation.
- **Surface and down-hole geophysical surveys** to improve targeting and support drill planning during 2026.
- **JORC Mineral Resource Estimate and economic studies** of near surface mineralisation being undertaken to support ongoing evaluation of a development pathway.

About The Elizabeth Hill Project

Elizabeth Hill is historically one of Australia's highest grade silver projects and has a proven production history outlined below:

- **High grades enabled low processing tonnes:** 1.2Moz of silver was produced from just 16,830t of ore at a head grade of 2,194g/t (70.5 oz/t Ag)[1].
- **Previous mining operation ceased in 2000:** because of low silver prices (US$5)[2].
- **Simplistic historical processing technique: native silver** was recovered via **low-cost** gravity separation techniques.
- **Untapped potential remains** in ground with deposit open at depth and recent consolidation of land package offers potential to discover more Elizabeth Hill style deposits.
- **Located within the world class West Pilbara mining jurisdiction and having a mining lease** with a potential processing option at the nearby Radio Hill site. Radio Hill is a **third party-owned** processing facility and WCE has signed an MOU with Artemis Resources Ltd to evaluate its suitability to potentially treat material from the Elizabeth Hill silver Mine.

Through the consolidation of the surrounding land packages into a single contiguous 180km^2 package significant exploration and growth potential exists both near mine and regionally. The land package holds a significant portion of the Munni Munni fault system, and other fault systems subparallel to the Munni Munni fault system, which are considered prospective for Elizabeth Hill look-a-like silver deposits.

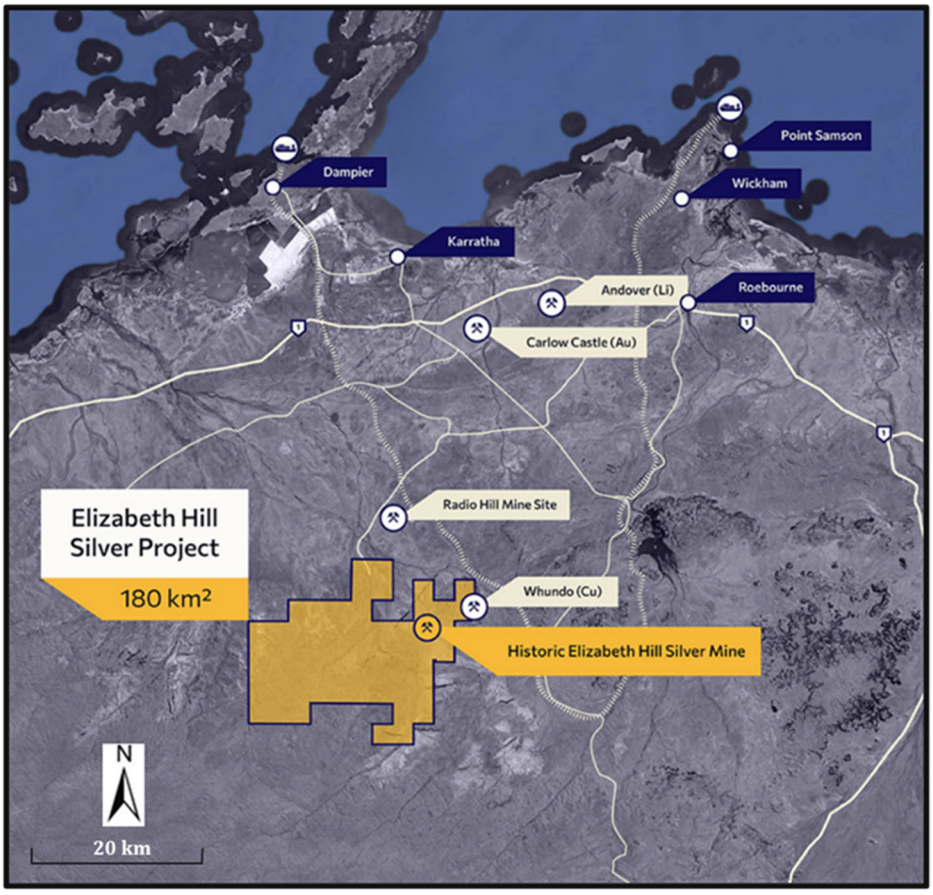


Figure 5: *Elizabeth Hill Project Tenement Location*

1 WAMEX Annual Report,1 April 2014 to 31 March 2015, Elizabeth Hill Silver Project, Global Strategic Metals NL, p16
2 www.kitco.com/charts/silver

This ASX announcement has been authorised for release by the Board of Directors of West Coast Silver Limited. For further information, please contact:

Bruce Garlick
Executive Director
West Coast Silver Limited
E: info@westcoastsilver.com.au

Competent Person Statement

The information in this announcement that relates to Exploration Results is based on information reviewed by Mr Max Nind who is a Member of the Australian Institute of Geoscientists. Mr Nind is a consultant to West Coast Silver and a full-time employee of ERM Australia Consultants Pty Ltd.

Mr Nind has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration, and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves', and a Specialist under the VALMIN Code 2015 Edition of the 'Australasian Code for Public Reporting of Technical Assessments and Valuations of Mineral Assets'. Mr Nind consents to the inclusion in the announcement of the matters based on this information and in the form and context in which it appears.

Forward-Looking Statements

Statements in this announcement which are not statements of historical facts, including but not limited to those relating to the proposed transaction, are forward-looking statements. These statements instead represent management's current expectations, estimates and projections regarding future events. Although management believes the expectations reflected in such forward-looking statements are reasonable, forward-looking statements are based on the opinions, assumptions and estimates of management at the date the statements are made and are subject to a variety of risks and uncertainties and other factors that could cause actual events or results to differ materially from those projected in the forward-looking statements.

Accordingly, investors are cautioned not to place undue reliance on such statements.

APPENDIX 1: CROSS SECTIONS

Aircore Drill Hole 25WCAC001 and Diamond Drill Holes 25WCDD019 and 25WCDD021

The entire aircore hole **25WCAC001** was mineralised with **24m @ 28g/t Ag from 2m** (note that 0-2m was not sampled, as the hole was collared on a pad made from historical mine material). The hole is collared 10m west of 25WCDD019, opens a structural corridor to the west-northwest, which is entirely hosted in granite and may be related to a splay or flexure in the Munni Munni Fault (Figures 1, 2 and 6).

Drill hole 25WCDD019 was designed to twin historical reverse circulation percussion (RC) drill hole EC079, intersecting silver mineralisation hosted within carbonate veins and iron-oxide rich veinlets, with associated malachite and black sulphide minerals, as previously reported (WCE ASX Announcement dated 5 November 2025). Assay results returned a significant intersection of **22m @ 578g/t Ag** from 6m, including **0.9m @ 9,070g/t Ag** from 9m (WCE ASX Announcement dated 4 February 2026).

The mineralised intersection in 25WCDD019 in the Munni Munni Fault and hangingwall, validates the silver mineralisation in EC079, and extends it 8m deeper than in EC079. The results indicate mineralisation is open to the northwest along a flexure in the Munni Munni Fault with further drilling required to test this interpretation.

Drill hole 25WCDD021 was designed to target mineralisation east and below historical RC hole EC080 (Figure 5). The significant intersections in the drill hole confirm the targeting criteria and include **3.2m @ 46g/t Ag** from 8m, **5m @ 27g/t Ag** from 16m and **7.52m @ 28g/t Ag** from 28.48m (WCE ASX Announcement dated 4 February 2026).

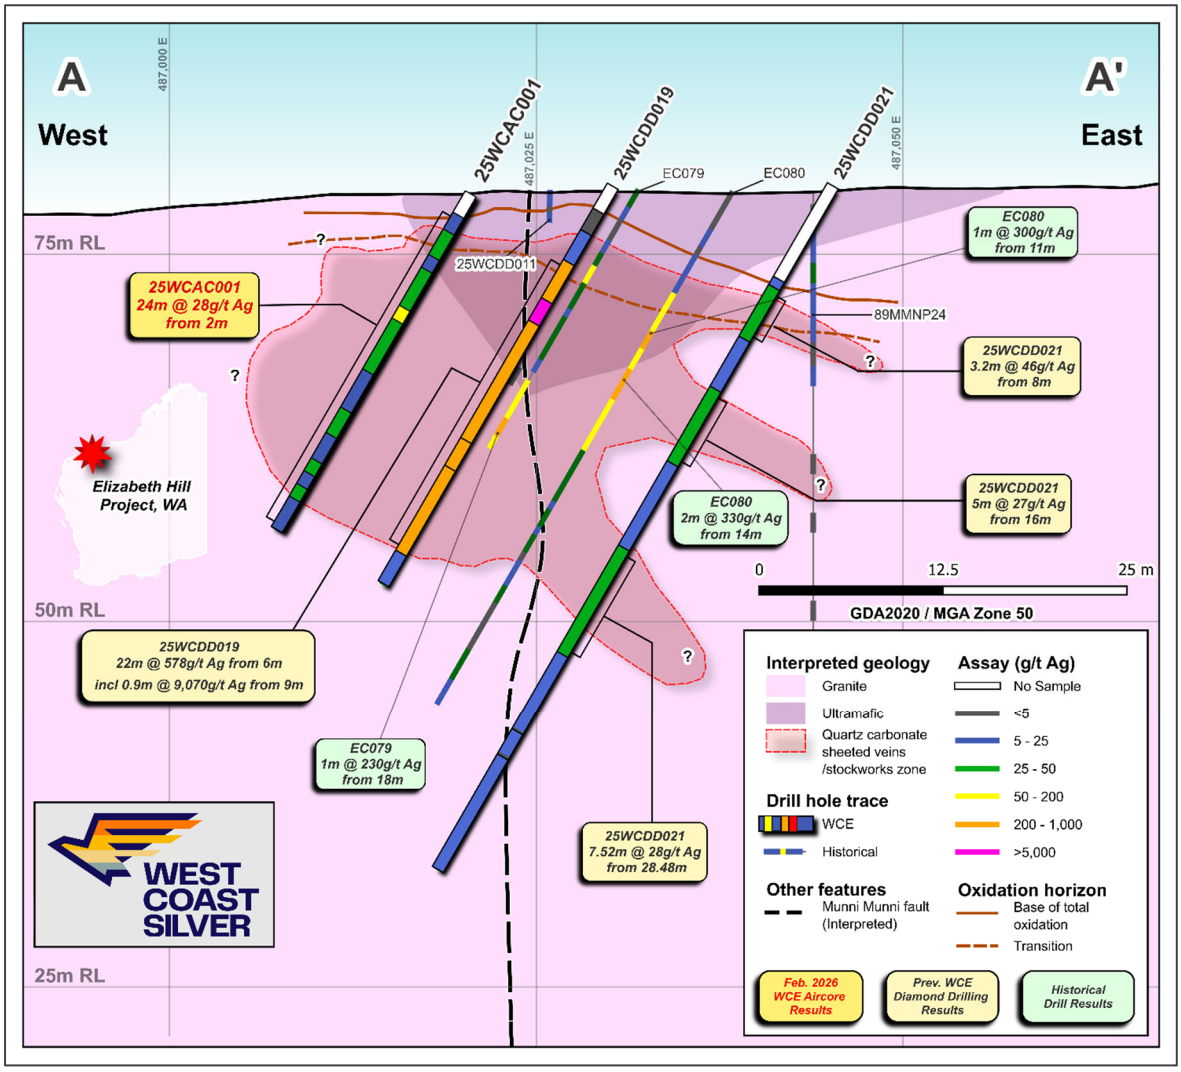


Figure 6: Cross section A-A' - 2025 drill holes 25WCAC001, 25WCDD019 and 25WCDD021 and historical drilling assay results. Note that 25WCAC001 was not sampled from 0m to 2m due to surface contamination.

Aircore Drill Holes 25WCAC002 and 25WCAC003

Drill hole 25WCAC002 intersected 3m @ 14g/t Ag from 2m and 12m @ 21g/t Ag from 12m (note that 0-1m sample was not included in the intersection due to possible contamination from surface material) in highly altered ultramafic rock with gossan like material (0m to 4m), and highly altered granite and gneiss with quartz-carbonate veins (<5mm thick) from 4m to the bottom of hole at 24m (Figures 1, 2 and 7).

Drill hole 25WCAC003 intersected 2.5m @ 80g/t Ag from 1m (note that 0-1m sample was not included in the intersection due to possible contamination from surface material) in chlorite altered granite hosting quartz veins (<5mm thick). The granite is intensely silicified from 3m to the bottom of hole at 3.5m (Figures 1, 2 and 7).

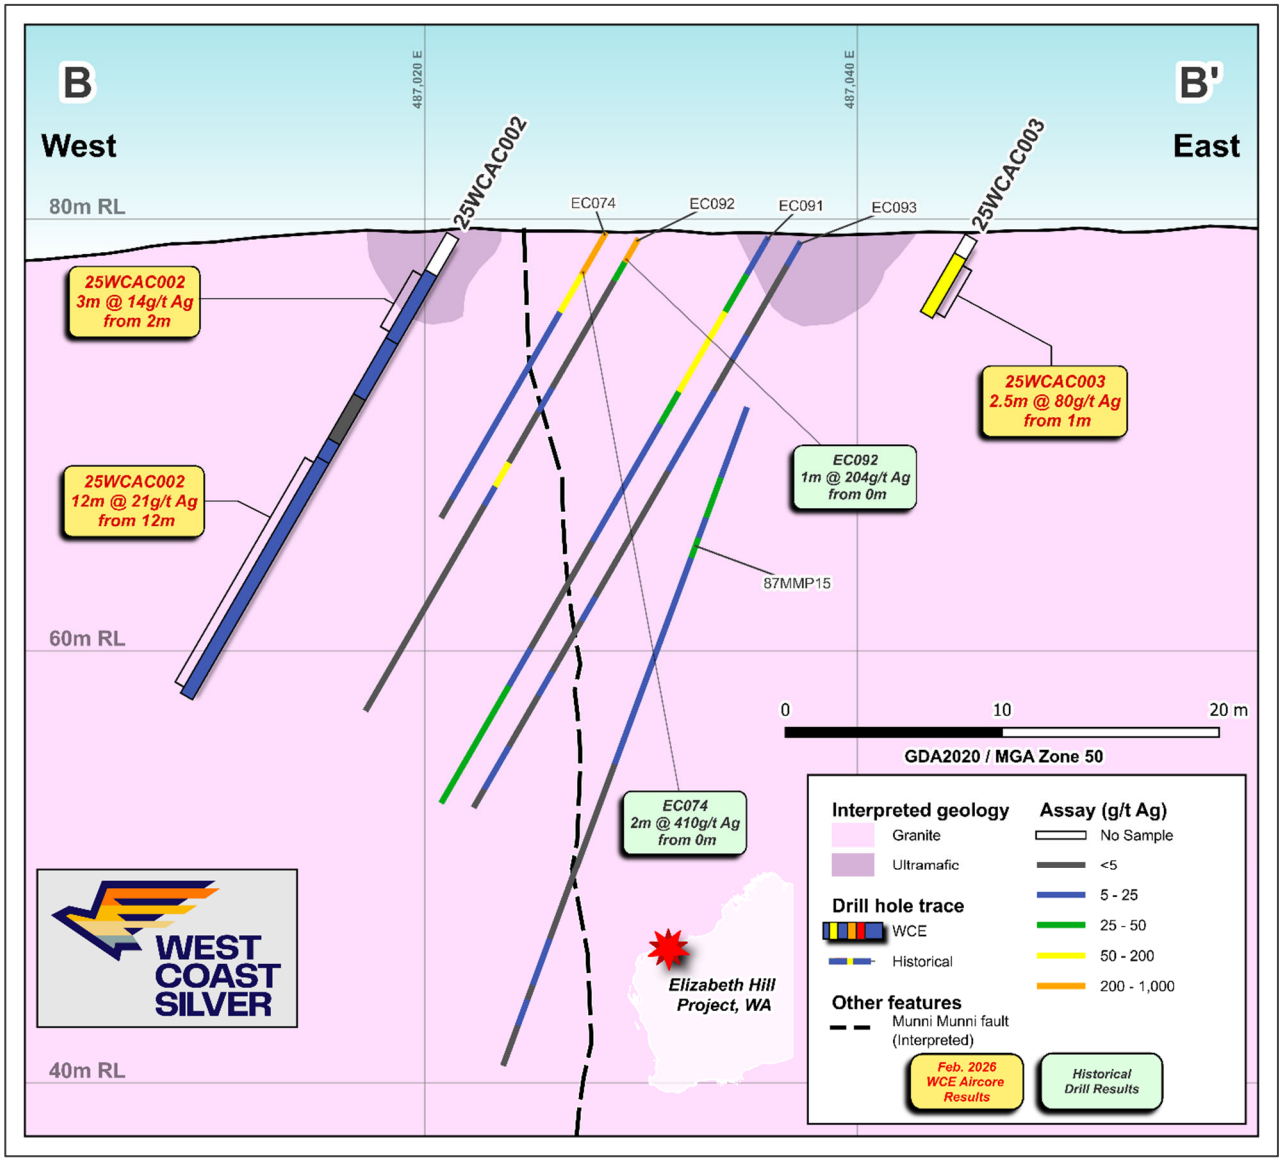


Figure 7: Cross section B-B' with assay results for aircore holes 25WCAC002 and 25WCAC003 and historical holes

Aircore Drill Holes 25WCAC004, 25WCAC005 and 25WCAC025

Drill hole **25WCDD005** intersected **3m @ 787g/t Ag from 1m including 1m @ 2,340g/t Ag from 1m** (note that 0-1m was excluded due to possible surface contamination). Mineralisation in this interval is hosted in strongly oxidised and chlorite altered granite containing disseminated fine-grained sulphides (1-2m) and thin (<1mm) quartz veins (2-3m) (Figures 1, 2 and 8).

Drill hole **25WCDD025** intersected **5m @ 55g/t Ag from 1m** and contained gossan-like material from 5m to the end of hole at 8m (note that 0-1m was excluded due to possible surface contamination). The gossan-like material contained **3m @ 1,492ppm Pb and 3m @ 344ppm Zn from 5m**. Anomalous Pb and Zn are known to be associated with, and adjacent to, silver mineralisation at the Elizabeth Hill Silver Mine (Figures 1, 2 and 8).

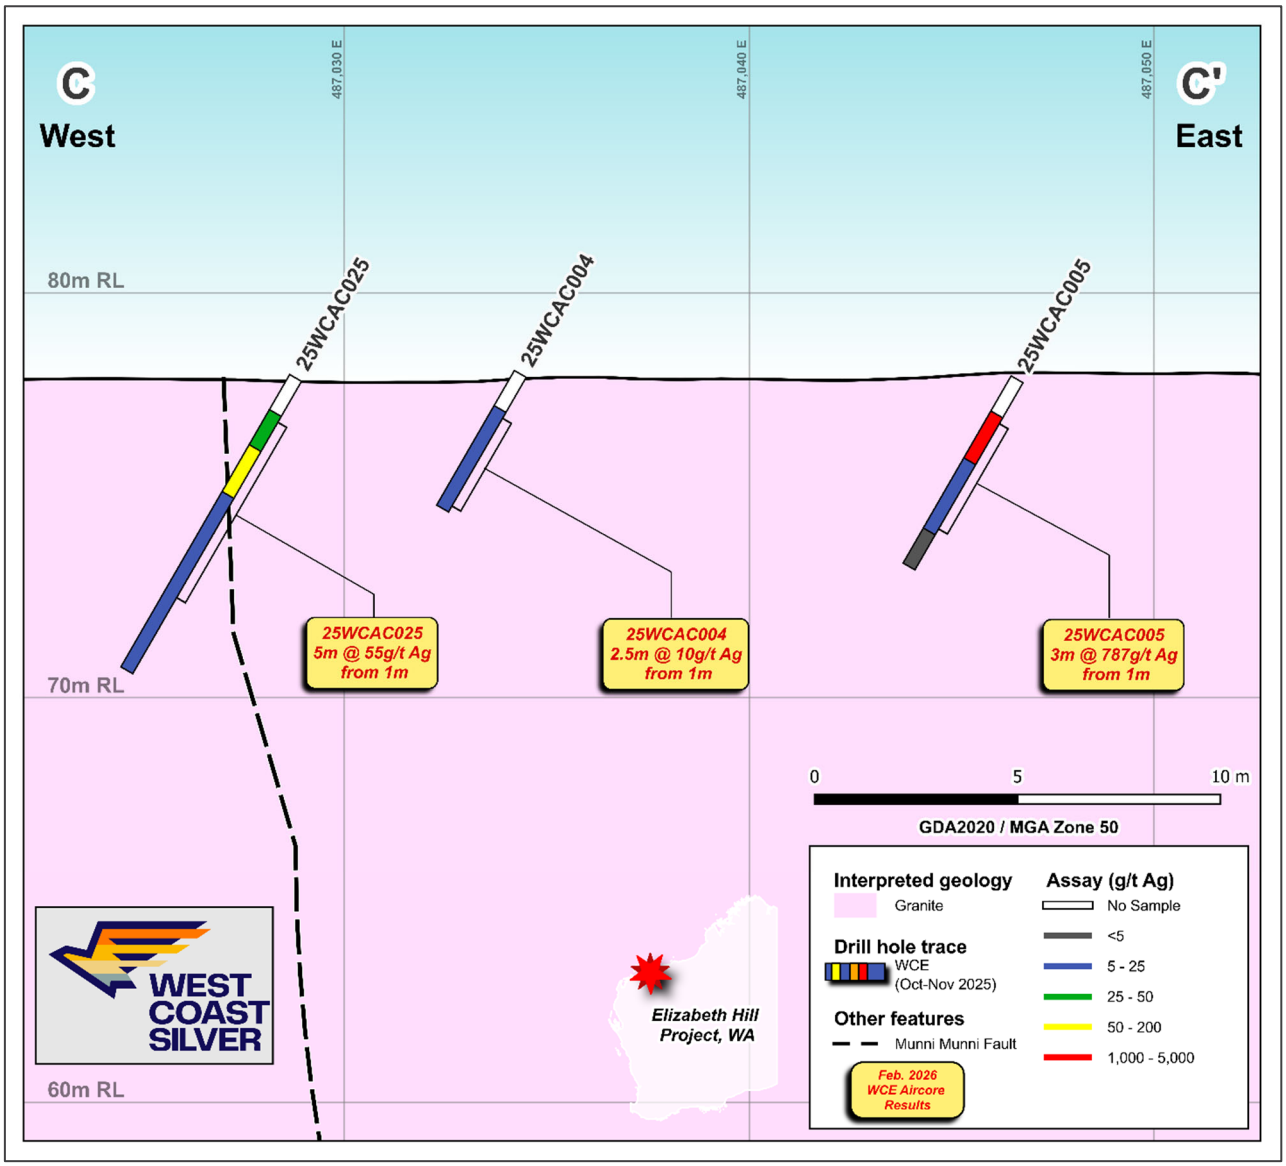


Figure 8: Cross section C-C' with assay results for aircore holes 25WCAC004, 25WCAC005, 25WCAC025 and historical holes

Aircore Drill Holes 25WCAC006 and 25WCAC026

Drill hole **25WCAC026** intersected **4m @ 88g/t Ag from surface** in weathered and chlorite-altered granite hosting quartz-carbonate veins (<1mm thick), and increasing silicification in the bottom of hole from 3.5-4m (Figures 1, 2 and 9). The silver intersection is supported by **1m @ 1,635ppm Co** from surface which is known to be associated with high-grade silver mineralisation at the Elizabth Hill Silver Mine. Silver intersections in drill holes 25WCAC025 (Figure 8) and 25WCAC026 are 20m apart, demonstrating the continuity of the mineralisation corridor north of the Elizabeth Hill Silver Mine.

Drill hole 25WCAC006 intersected 1m @ 26g/t Ag from1m (note the 0-1m sample was excluded due to possible surface contamination) in moderately chlorite altered granite (Figures 1, 2 and 9).

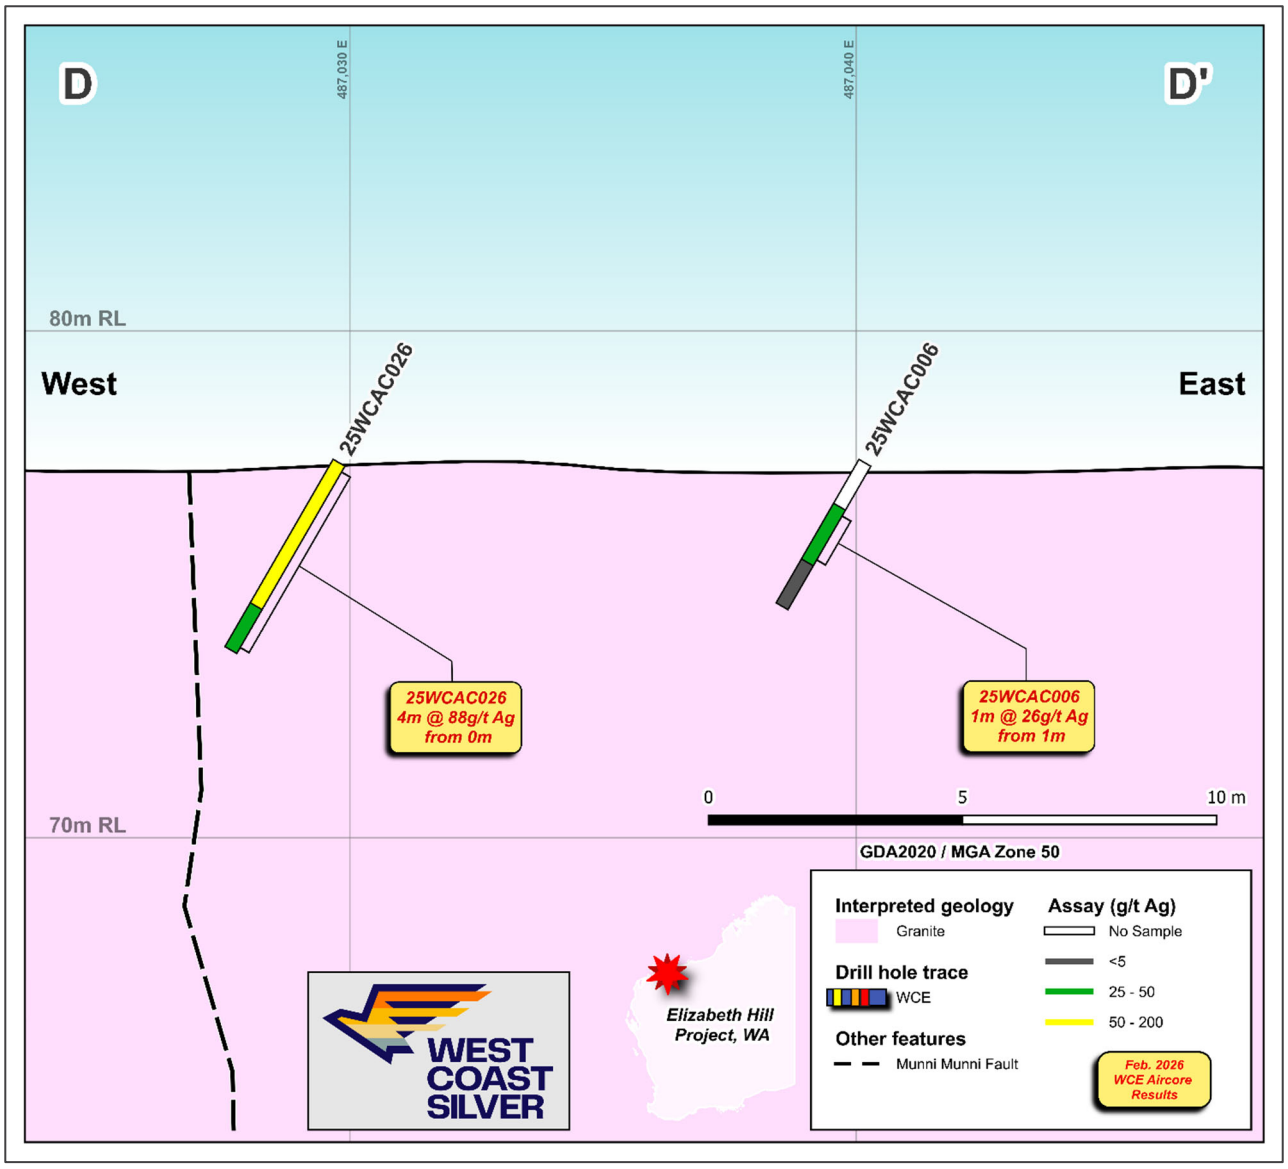


Figure 9: Cross section D-D' with assay results for aircore holes 25WCAC006 and 25WCAC026

Aircore Drill Holes 25WCAC017 to 25WCAC022

Very low-grade silver mineralisation above 5g/t Ag indicates slight silver enrichment distal to silver mineralisation (Figures 1, 2 and 10).

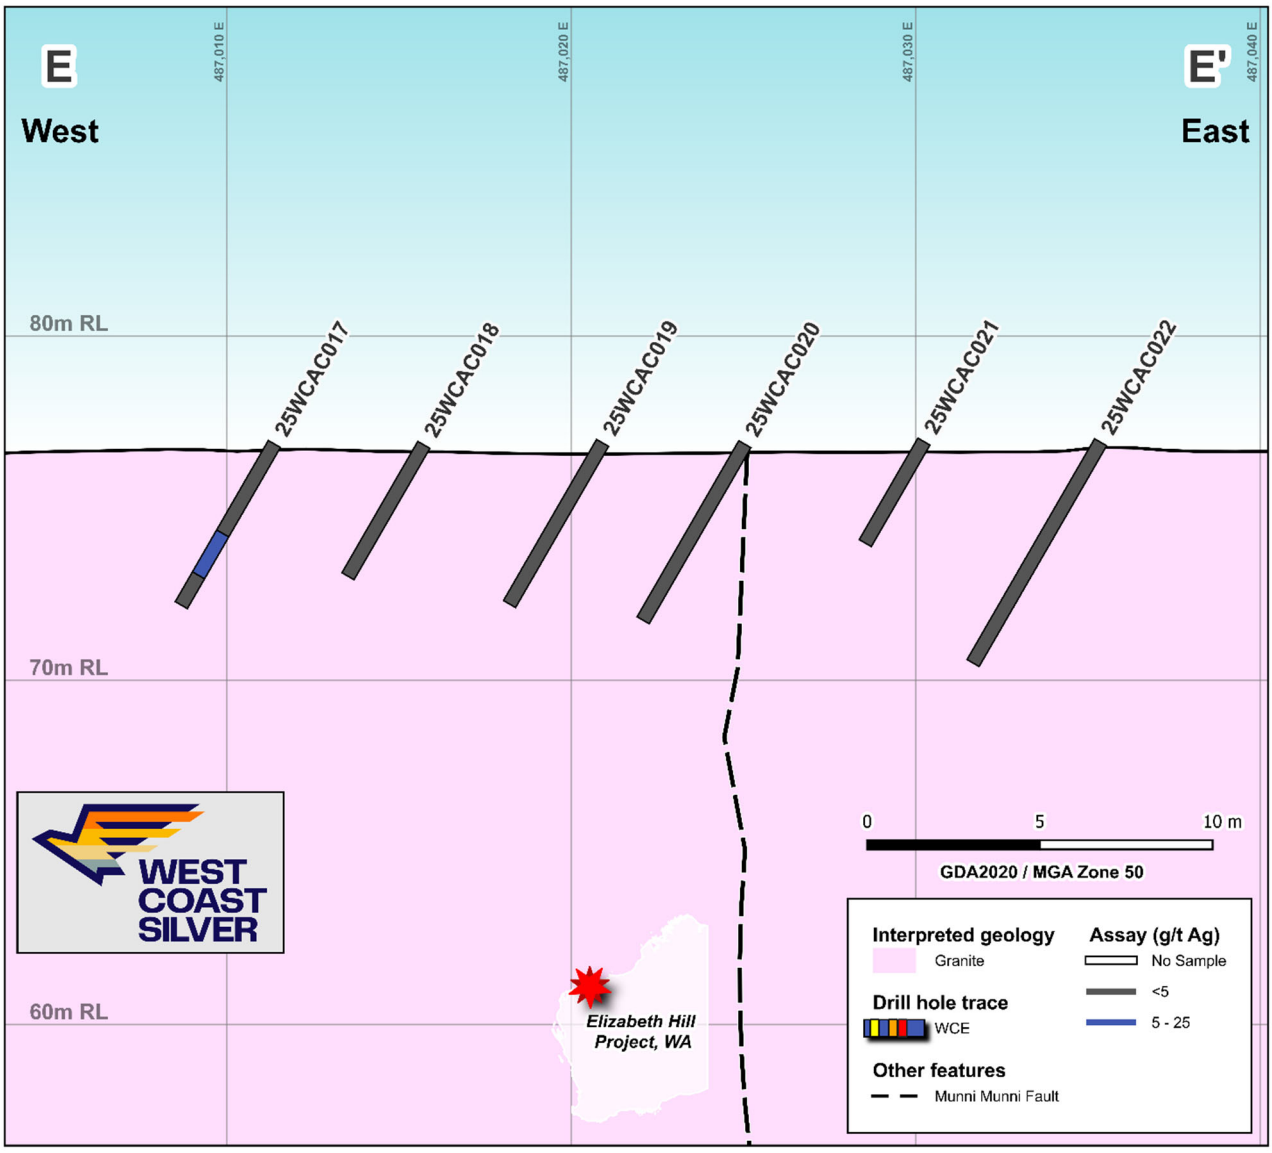


Figure 10: Cross section E-E' with assay results for aircore holes 25WCAC017 to 25WCAC022

Aircore Drill Holes 25WCAC007 to 25WCAC013

Mineralisation intersected in **25WCAC008** (**0.5m @ 61g/t** Ag from 8m), located 225m north of the Elizabeth Hill mine on the northern extension of the Munni Munni Fault, is important for demonstrating the potential to the north of the historical workings (Figures 1, 2 and 11).

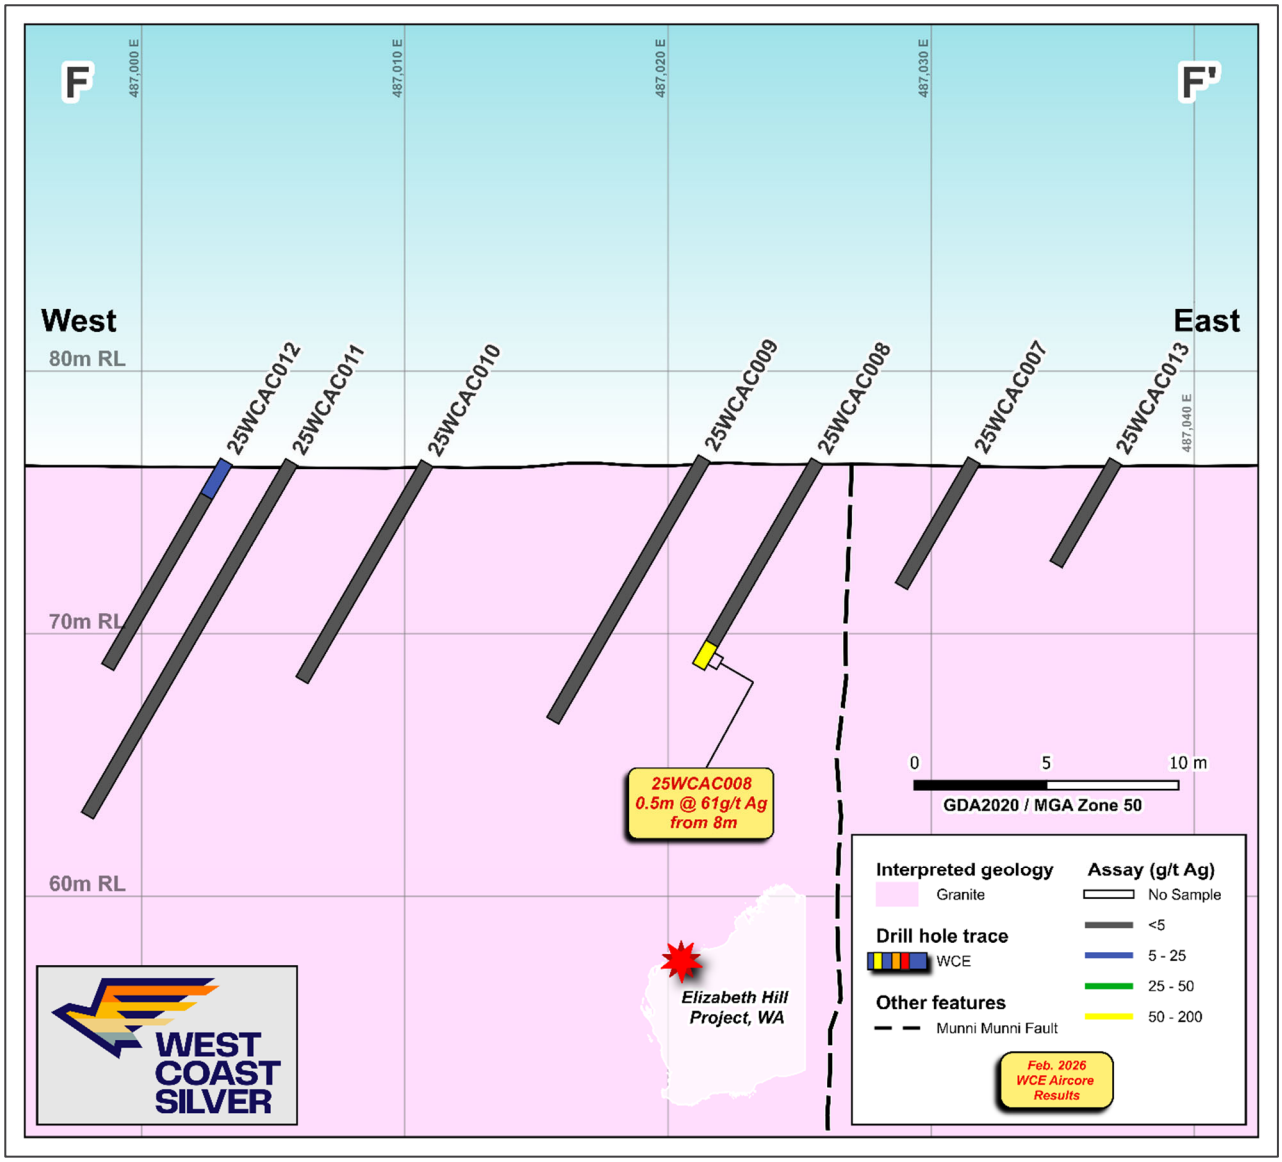


Figure 11: Cross section F-F' with assay results for aircore holes 25WCAC007 to 25WCAC013

Aircore Drill Holes 25WCAC027 to 25WCAC029

Drill holes 25WCAC027 to 25WCAC029 did not contain significant intersections above 10g/t Ag. Very low -grade silver, above 5g/t Ag, in drill hole 25WCAC027 is interpreted to reflect slight silver enrichment distal to silver mineralisation (Figures 1, 3 and 12).

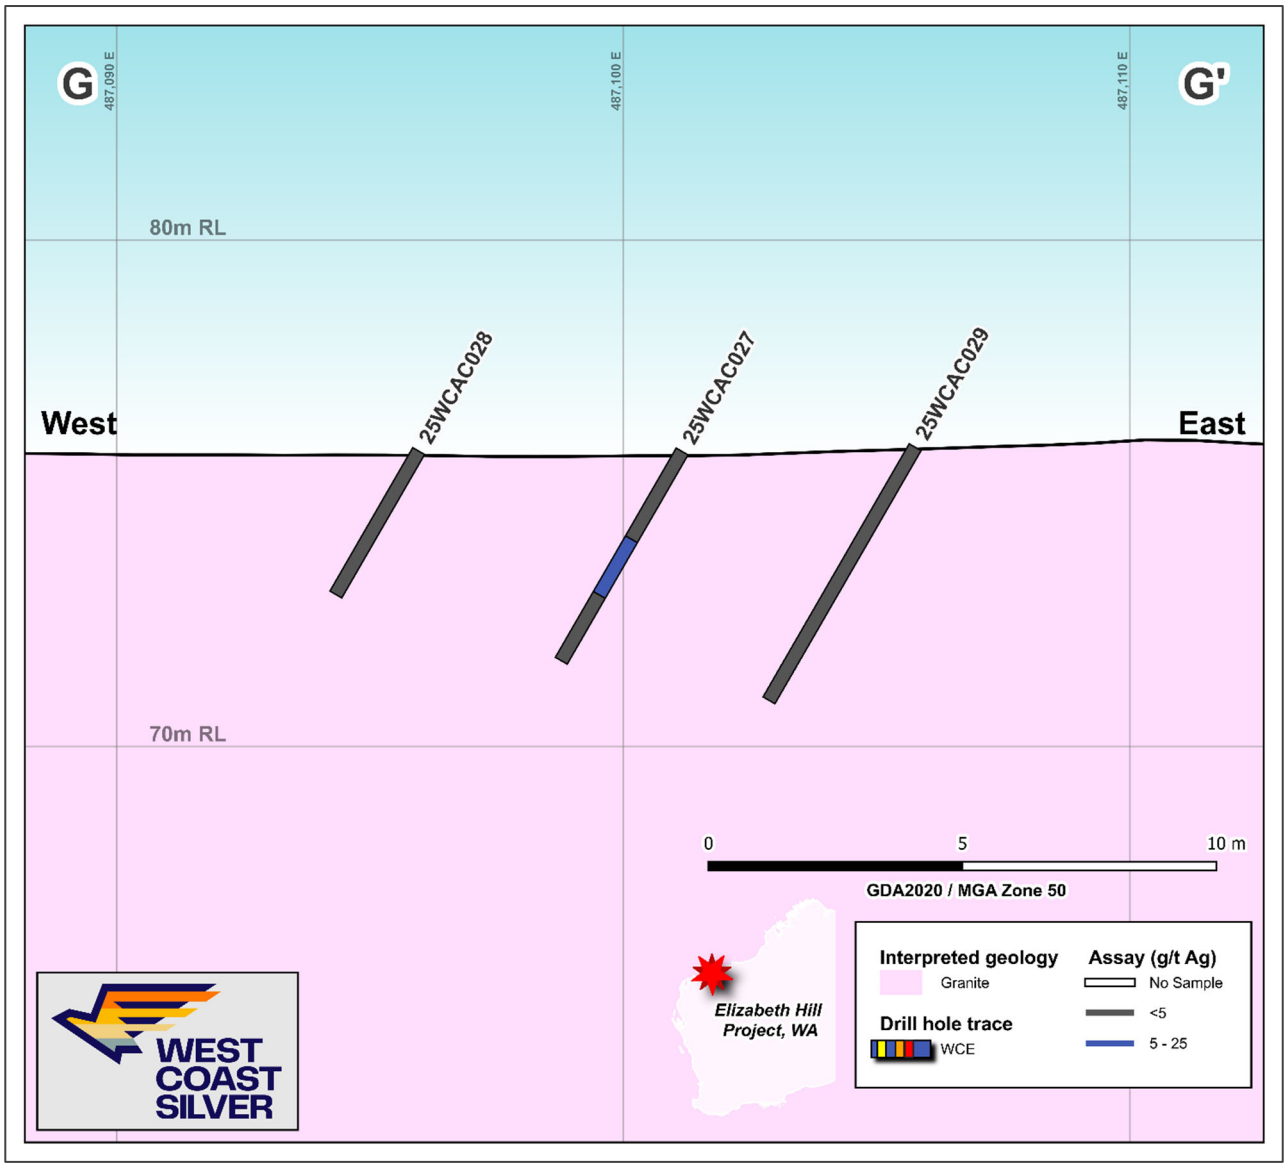


Figure 12: Cross section G-G' with aircore drill holes 25WCAC027 to 25WCAC029

Aircore Drill Holes 25WCAC037 to 25WCAC039, 25WCAC071 and 25WCAC072

A mineralised intersection of **2m @ 39g/t Ag** in **25WCAC071** is encouraging for the potential of the Elizabeth Hill South prospect (Figures 1, 3 and 13), located 275m south of the Elizabeth Hill Silver Mine, where historical mineralisation such as 2m @ 1,550g/t Ag from 108m in AMEHRC012 and 1m @ 250g/t Ag from 118m in AG43 (WCE ASX Announcement dated 5 August 2025) point to the potential of this underexplored area (Figure 4).

Drill holes 25WCAC037 to 25WCAC039, and 25WCAC072 contained less than 5g/t Ag.

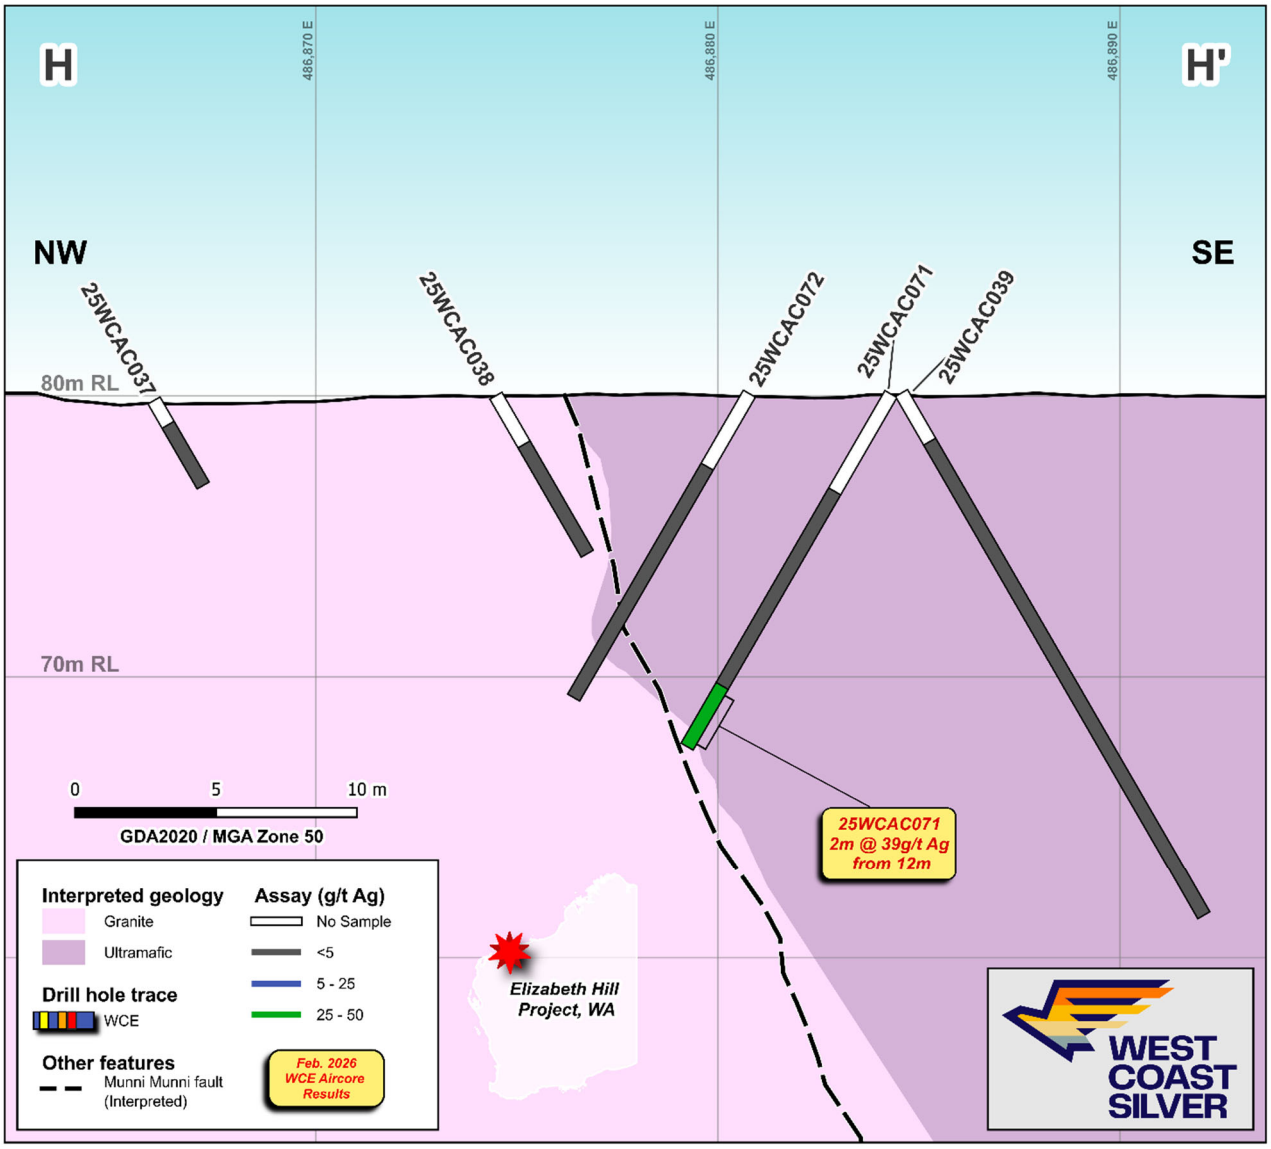


Figure 13: Cross section G-G' with assay results for aircore holes 25WCAC037 to 25WCAC039, 25WCAC071 and 25WCAC072

Appendix 2: Aircore Drill Hole Collar Details

Drill Hole ID	Easting (m)	Northing (m)	RL (mASL)	Azimuth (°)	Dip (°)	Drilled Depth(m)
25WCAC001	487021	7667956	86.4	270	-60	26.0
25WCAC002	487021	7667966	86.3	270	-60	24.0
25WCAC003	487045	7667967	86.1	270	-60	3.5
25WCAC004	487034	7667987	85.1	270	-60	3.5
25WCAC005	487047	7667991	84.8	270	-60	5.0
25WCAC006	487040	7668008	84.4	270	-60	3.0
25WCAC007	487032	7668097	83.5	270	-60	5.0
25WCAC008	487026	7668097	83.4	270	-60	8.5
25WCAC009	487021	7668097	85.4	270	-60	11.0
25WCAC010	487011	7668097	85.4	270	-60	9.0
25WCAC011	487006	7668097	83.4	270	-60	15.0
25WCAC012	487003	7668097	83.5	270	-60	8.5
25WCAC013	487037	7668097	83.4	270	-60	4.0
25WCAC014	487002	7668080	83.5	90	-60	7.0
25WCAC015	487005	7668082	83.5	270	-60	2.5
25WCAC016	487007	7668082	83.5	270	-60	7.0
25WCAC017	487011	7668054	83.8	270	-60	5.0
25WCAC018	487016	7668054	83.8	270	-60	4.0
25WCAC019	487021	7668054	83.8	270	-60	5.0
25WCAC020	487025	7668054	83.8	270	-60	5.5
25WCAC021	487030	7668054	83.8	270	-60	3.0
25WCAC022	487035	7668054	83.8	270	-60	7.0
25WCAC023	487030	7668032	84.1	270	-60	4.0
25WCAC024	487039	7668032	84.1	270	-60	3.0
25WCAC025	487029	7667987	85.0	270	-60	8.0
25WCAC026	487030	7668009	84.4	270	-60	4.0
25WCAC027	487101	7668136	82.8	270	-60	4.5
25WCAC028	487096	7668136	82.8	270	-60	3.0
25WCAC029	487106	7668136	82.9	270	-60	5.5
25WCAC030	486922	7667624	87.3	135	-60	6.0
25WCAC031	486961	7667668	86.6	270	-60	12.0
25WCAC032	486951	7667668	86.7	270	-60	18.0
25WCAC033	486941	7667668	86.9	270	-60	7.5
25WCAC034	486931	7667667	86.9	270	-60	9.0
25WCAC035	486938	7667667	86.9	270	-60	6.0
25WCAC036	486990	7667668	86.5	270	-60	27.0
25WCAC037	486865	7667619	87.6	135	-60	3.0
25WCAC038	486874	7667610	87.6	135	-60	6.0

Drill Hole ID	Easting (m)	Northing (m)	RL (mASL)	Azimuth (°)	Dip (°)	Drilled Depth(m)
25WCAC039	486884	7667600	87.7	135	-60	21.0
25WCAC040	486931	7667608	87.4	135	-60	19.0
25WCAC041	486952	7667590	87.6	135	-60	25.0
25WCAC042	486866	7667579	88.0	270	-60	18.0
25WCAC043	486871	7667578	88.0	270	-60	18.0
25WCAC044	486866	7667530	88.5	270	-60	19.0
25WCAC045	486871	7667482	88.9	270	-60	36.0
25WCAC046	486866	7667442	89.3	270	-60	30.0
25WCAC047	486871	7667398	90.0	270	-60	30.0
25WCAC048	486871	7667365	90.7	270	-60	48.0
25WCAC049	486915	7667368	92.3	270	-60	30.0
25WCAC050	486902	7667368	91.7	270	-60	20.0
25WCAC051	486885	7667367	91.1	270	-60	20.0
25WCAC052	486912	7667329	94.7	270	-60	20.0
25WCAC053	486902	7667333	93.7	270	-60	16.0
25WCAC054	486887	7667328	92.9	270	-60	33.0
25WCAC055	486871	7667325	92.0	270	-60	51.0
25WCAC056	486886	7667283	94.9	270	-60	8.0
25WCAC057	487422	7667668	95.2	90	-60	8.0
25WCAC058	487470	7667613	97.1	42	-60	11.0
25WCAC059	487626	7666750	102.8	102	-60	4.0
25WCAC060	487612	7666753	101.1	101	-60	13.0
25WCAC061	487637	7666697	105.5	105	-60	10.0
25WCAC062	487632	7666675	104.7	104	-60	18.0
25WCAC063	487524	7666496	101.2	101	-60	19.5
25WCAC064	487535	7666494	100.8	100	-60	13.0
25WCAC065	487550	7666489	100.5	100	-60	20.0
25WCAC066	487515	7666277	101.5	135	-60	24.0
25WCAC067	487666	7666396	97.5	60	-60	12.0
25WCAC068	486941	7667599	87.5	135	-60	31.0
25WCAC069	486963	7667580	87.6	135	-60	24.0
25WCAC070	486882	7667580	87.9	270	-60	15.0
25WCAC071	486884	7667601	87.6	315	-60	14.0
25WCAC072	486880	7667604	87.7	315	-60	12.0
25WCAC073	486932	7667608	87.3	315	-60	7.0
25WCAC074	486936	7667605	87.3	315	-60	9.0
25WCAC075	486867	7667563	88.1	270	-60	7.0
25WCAC076	486873	7667595	87.7	270	-60	28.0

Note: Grid coordinate system is GDA2020 Zone 50

Appendix 3: Aircore Drilling Assay Results

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC001	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC001	2	3	1	17.25	180	231	376	155	0.02	21	1.0
25WCAC001	3	4	1	26.00	205	127	1,005	252	0.02	12	1.2
25WCAC001	4	5	1	28.50	77	52	457	120	0.02	7	1.6
25WCAC001	5	6	1	24.80	148	84	865	201	0.04	40	1.7
25WCAC001	6	7	1	34.00	145	143	2,350	505	0.06	19	2.5
25WCAC001	7	8	1	40.40	59	76	727	324	0.02	9	1.0
25WCAC001	8	9	1	38.90	88	83	538	337	0.05	8	0.7
25WCAC001	9	10	1	50.80	70	53	419	262	0.04	18	1.1
25WCAC001	10	11	1	32.10	109	112	806	526	0.07	11	0.7
25WCAC001	11	12	1	31.40	48	56	307	277	0.02	6	1.0
25WCAC001	12	13	1	32.20	115	70	461	367	0.04	8	0.7
25WCAC001	13	14	1	28.20	112	63	438	293	0.04	10	2.4
25WCAC001	14	15	1	21.70	114	111	467	434	0.07	11	1.4
25WCAC001	15	16	1	22.80	94	88	273	378	0.03	8	1.1
25WCAC001	16	17	1	24.50	65	75	119	300	0.02	7	0.4
25WCAC001	17	18	1	37.10	61	63	100	253	0.03	9	0.7
25WCAC001	18	19	1	28.40	142	94	355	408	0.12	10	0.8
25WCAC001	19	20	1	21.60	76	68	149	300	0.05	5	0.8
25WCAC001	20	21	1	23.60	68	73	101	298	0.04	6	0.8
25WCAC001	21	22	1	27.90	79	77	158	297	0.04	9	0.8
25WCAC001	22	23	1	21.00	244	182	730	787	0.11	20	2.7
25WCAC001	23	24	1	27.00	412	111	1,995	562	0.14	10	1.6
25WCAC001	24	25	1	20.60	74	55	221	280	0.05	6	1.5
25WCAC001	25	26	1	19.60	43	34	78	197	0.02	120	3.5
25WCAC002	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC002	2	3	1	12.90	706	906	368	241	0.12	61	0.7
25WCAC002	3	4	1	12.50	617	918	157	155	0.12	80	0.9
25WCAC002	4	5	1	15.45	473	667	231	271	0.11	66	6.1
25WCAC002	5	6	1	9.15	66	75	83	118	0.03	11	0.7
25WCAC002	6	7	1	9.99	48	46	47	97	0.04	10	1.0
25WCAC002	7	8	1	5.60	32	27	23	69	0.02	5	0.5
25WCAC002	8	9	1	2.36	23	23	19	88	0.02	6	0.8
25WCAC002	9	10	1	2.12	27	24	66	139	0.02	6	1.0
25WCAC002	10	11	1	2.73	17	19	74	104	0.02	6	0.9
25WCAC002	11	12	1	8.67	38	36	2,880	192	0.21	6	0.9
25WCAC002	12	13	1	23.60	131	79	850	441	0.27	8	1.3
25WCAC002	13	14	1	17.25	72	60	334	305	0.08	6	0.9
25WCAC002	14	15	1	22.20	80	75	212	312	0.06	7	0.9
25WCAC002	15	16	1	18.70	95	82	282	319	0.05	7	0.9
25WCAC002	16	17	1	22.10	81	75	128	300	0.05	6	0.5

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC002	17	18	1	20.10	107	98	215	360	0.04	9	0.7
25WCAC002	18	19	1	13.20	393	406	773	1,355	0.13	29	1.5
25WCAC002	19	20	1	20.80	185	190	393	619	0.09	15	1.4
25WCAC002	20	21	1	20.60	39	30	85	126	0.06	3	1.0
25WCAC002	21	22	1	21.00	58	48	210	204	0.04	91	2.3
25WCAC002	22	23	1	24.50	54	48	87	259	0.02	63	4.0
25WCAC002	23	24	1	23.80	29	26	48	110	0.01	8	0.6
25WCAC003	0	1	1	65.60	129	83	170	151	0.08	9	2.8
25WCAC003	1	2	1	124.00	312	163	424	353	0.4	19	9.8
25WCAC003	2	3	1	67.70	191	72	342	235	0.2	15	3.4
25WCAC003	3	3.5	0.5	15.10	415	50	161	112	0.3	8	1.6
25WCAC004	0	1	1	9.63	28	24	63	49	0.03	11	0.7
25WCAC004	1	2	1	12.25	37	34	98	65	0.05	7	1.0
25WCAC004	2	3	1	8.18	23	11	58	14	0.03	250	1.0
25WCAC004	3	3.5	0.5	10.95	23	15	51	29	0.02	3	1.4
25WCAC005	0	1	1	65.80	114	142	124	90	0.04	14	2.4
25WCAC005	1	2	1	2340.00	38	34	58	48	0.02	6	1.6
25WCAC005	2	3	1	8.34	21	16	22	42	0.02	4	0.9
25WCAC005	3	4	1	11.85	22	19	34	44	0.01	6	1.1
25WCAC005	4	5	1	4.64	62	33	17	39	0.18	14	1.3
25WCAC006	0	1	1	49.70	81	70	148	91	0.06	11	4.9
25WCAC006	1	2	1	25.50	111	94	837	331	0.11	11	4.6
25WCAC006	2	3	1	2.59	11	13	26	31	0.01	2	2.4
25WCAC007	0	1	1	3.32	35	64	23	22	0.1	9	0.4
25WCAC007	1	2	1	0.50	35	57	16	38	0.1	10	0.6
25WCAC007	2	3	1	0.47	24	28	10	54	0.08	8	0.4
25WCAC007	3	4	1	0.94	21	27	12	53	0.07	14	1.4
25WCAC007	4	5	1	1.10	13	15	13	23	0.07	3	2.1
25WCAC008	0	1	1	0.83	42	78	24	22	0.13	9	0.7
25WCAC008	1	2	1	0.64	41	70	20	32	0.15	11	0.4
25WCAC008	2	3	1	0.34	10	11	15	14	0.1	5	0.6
25WCAC008	3	4	1	0.55	13	14	11	30	0.08	5	1.0
25WCAC008	4	5	1	0.45	19	10	5	40	0.02	5	0.8
25WCAC008	5	6	1	0.74	21	15	8	60	0.04	6	0.5
25WCAC008	6	7	1	0.49	12	16	7	70	0.05	9	0.7
25WCAC008	7	8	1	0.29	13	7	6	35	0.02	3	0.5
25WCAC008	8	8.5	0.5	61.00	49	14	16	70	0.08	283	5.8
25WCAC009	0	1	1	0.93	18	49	13	10	0.05	10	1.3
25WCAC009	1	2	1	0.52	8	10	9	6	0.06	1	0.9
25WCAC009	2	3	1	0.51	22	14	10	39	0.05	5	0.4
25WCAC009	3	4	1	1.65	17	17	16	22	0.05	6	1.2
25WCAC009	4	5	1	0.30	13	9	6	28	0.02	4	0.7
25WCAC009	5	6	1	0.59	31	18	6	87	0.05	8	0.7
25WCAC009	6	7	1	0.72	7	8	6	33	0.03	4	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC009	7	8	1	0.44	15	8	6	46	0.03	6	0.7
25WCAC009	8	9	1	0.53	9	12	7	60	0.04	6	0.7
25WCAC009	9	10	1	0.46	10	6	7	53	0.02	3	1.0
25WCAC009	10	11	1	0.34	19	5	8	73	0.07	4	0.5
25WCAC010	0	1	1	2.49	99	212	38	32	0.09	23	0.8
25WCAC010	1	2	1	1.58	36	81	17	17	0.09	10	0.8
25WCAC010	2	3	1	0.38	17	35	12	22	0.07	6	0.3
25WCAC010	3	4	1	0.43	16	18	6	33	0.03	5	1.2
25WCAC010	4	5	1	0.38	27	12	9	35	0.03	4	1.0
25WCAC010	5	6	1	0.38	16	11	9	51	0.06	5	1.2
25WCAC010	6	7	1	0.42	11	12	10	43	0.06	5	0.9
25WCAC010	7	8	1	0.51	7	5	12	21	0.04	3	0.8
25WCAC010	8	9	1	1.16	5	10	13	40	0.24	5	0.8
25WCAC011	0	1	1	2.53	132	299	47	48	0.11	31	0.4
25WCAC011	1	2	1	0.96	74	180	27	35	0.09	21	0.3
25WCAC011	2	3	1	0.26	18	35	10	31	0.04	6	0.3
25WCAC011	3	4	1	0.43	13	26	8	33	0.03	5	0.9
25WCAC011	4	5	1	0.26	15	16	13	49	0.05	5	0.8
25WCAC011	5	6	1	0.40	12	12	17	42	0.11	4	1.0
25WCAC011	6	7	1	0.56	15	16	19	45	0.06	5	2.1
25WCAC011	7	8	1	1.78	5	8	32	41	0.06	14	1.2
25WCAC011	8	9	1	1.18	76	547	383	372	0.08	56	0.6
25WCAC011	9	10	1	0.94	19	52	57	118	0.06	6	2.1
25WCAC011	10	11	1	0.25	10	21	20	103	0.02	7	0.6
25WCAC011	11	12	1	0.62	10	18	14	107	0.03	7	1.2
25WCAC011	12	13	1	0.43	16	18	19	98	0.03	7	0.5
25WCAC011	13	14	1	0.48	45	11	27	85	0.05	8	0.9
25WCAC011	14	15	1	0.73	31	15	19	145	0.04	6	1.5
25WCAC012	0	1	1	9.49	14	6	45	35	0.16	203	1.0
25WCAC012	1	2	1	1.10	60	136	26	33	0.13	18	0.5
25WCAC012	2	3	1	0.48	19	13	20	29	0.14	4	0.6
25WCAC012	3	4	1	0.88	17	21	13	31	0.05	4	0.9
25WCAC012	4	5	1	1.64	13	15	18	36	0.06	17	1.7
25WCAC012	5	6	1	1.22	61	347	97	194	0.05	34	1.2
25WCAC012	6	7	1	1.04	137	907	178	359	0.14	61	0.3
25WCAC012	7	8	1	1.32	22	237	108	249	0.12	23	0.5
25WCAC012	8	8.5	0.5	1.82	24	99	52	124	0.07	18	4.5
25WCAC013	0	1	1	0.56	54	78	20	34	0.11	11	1.1
25WCAC013	1	2	1	0.36	30	25	12	42	0.1	8	0.5
25WCAC013	2	3	1	0.22	25	25	10	46	0.08	6	0.5
25WCAC013	3	4	1	1.04	29	32	16	52	0.2	10	1.4
25WCAC014	0	1	1	1.82	77	168	31	26	0.08	18	0.6
25WCAC014	1	2	1	0.72	55	126	34	28	0.08	15	0.6
25WCAC014	2	3	1	0.18	14	20	8	42	0.02	6	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC014	3	4	1	0.26	15	32	10	39	0.03	7	0.4
25WCAC014	4	5	1	0.21	13	15	7	35	0.04	5	0.6
25WCAC014	5	6	1	0.20	13	12	9	36	0.02	4	1.4
25WCAC014	6	7	1	0.28	15	11	6	47	0.02	7	1.1
25WCAC015	0	1	1	2.03	92	186	38	32	0.09	20	0.6
25WCAC015	1	2	1	0.69	50	111	26	51	0.08	18	0.4
25WCAC015	2	2.5	0.5	1.97	51	93	29	34	0.13	35	2.5
25WCAC016	0	1	1	2.06	69	127	58	24	0.11	13	0.7
25WCAC016	1	2	1	0.85	56	125	27	19	0.12	12	0.5
25WCAC016	2	3	1	0.53	56	109	24	33	0.11	14	0.5
25WCAC016	3	4	1	0.76	34	46	16	40	0.04	9	1.0
25WCAC016	4	5	1	0.25	22	23	14	42	0.03	6	0.6
25WCAC016	5	6	1	0.39	24	27	19	32	0.04	6	1.4
25WCAC016	6	7	1	0.40	13	8	13	30	0.05	4	0.9
25WCAC017	0	1	1	3.79	45	66	34	29	0.06	8	0.7
25WCAC017	1	2	1	3.89	22	21	26	24	0.04	4	0.8
25WCAC017	2	3	1	4.07	16	15	25	33	0.07	5	1.2
25WCAC017	3	4	1	6.37	21	11	19	48	0.07	9	0.8
25WCAC017	4	5	1	0.74	18	9	14	51	0.04	4	0.6
25WCAC018	0	1	1	4.87	33	52	21	23	0.04	6	0.4
25WCAC018	1	2	1	1.94	16	30	10	30	0.04	6	0.2
25WCAC018	2	3	1	3.12	10	16	9	29	0.03	6	0.8
25WCAC018	3	4	1	3.45	31	29	21	73	0.14	9	0.6
25WCAC019	0	1	1	1.65	55	78	30	40	0.1	10	0.8
25WCAC019	1	2	1	0.65	18	26	11	48	0.06	7	1.0
25WCAC019	2	3	1	0.70	14	13	8	48	0.05	5	0.2
25WCAC019	3	4	1	0.69	23	64	6	117	0.05	12	0.5
25WCAC019	4	5	1	1.53	16	31	15	113	0.09	10	0.6
25WCAC020	0	1	1	3.20	41	45	21	56	0.06	8	0.5
25WCAC020	1	2	1	0.43	12	14	5	44	0.02	5	0.5
25WCAC020	2	3	1	0.68	32	73	19	129	0.07	15	0.8
25WCAC020	3	4	1	0.76	45	89	15	156	0.11	19	0.9
25WCAC020	4	5	1	1.18	16	26	10	51	0.05	7	1.6
25WCAC020	5	5.5	0.5	0.69	11	22	5	43	0.04	7	1.4
25WCAC021	0	1	1	1.60	34	44	15	29	0.04	7	0.5
25WCAC021	1	2	1	0.50	26	28	7	41	0.04	7	0.3
25WCAC021	2	3	1	2.19	20	21	11	35	0.06	6	0.8
25WCAC022	0	1	1	1.04	41	52	29	27	0.05	8	0.6
25WCAC022	1	2	1	0.50	20	20	11	22	0.02	4	0.5
25WCAC022	2	3	1	0.38	10	21	7	37	0.03	6	0.3
25WCAC022	3	4	1	0.22	16	20	8	43	0.02	6	0.3
25WCAC022	4	5	1	0.18	11	16	4	48	0.02	6	0.5
25WCAC022	5	6	1	0.21	25	27	5	80	0.02	9	0.4
25WCAC022	6	7	1	0.33	46	55	12	148	0.08	13	0.5

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC023	0	1	1	3.16	39	46	32	50	0.04	9	0.7
25WCAC023	1	2	1	0.26	14	21	10	56	0.03	8	0.4
25WCAC023	2	3	1	0.30	11	13	10	46	0.02	6	0.3
25WCAC023	3	4	1	1.91	14	7	17	17	0.02	18	0.5
25WCAC024	0	1	1	3.13	50	56	31	29	0.06	15	0.7
25WCAC024	1	2	1	1.58	42	18	12	24	0.02	4	0.4
25WCAC024	2	3	1	1.63	45	14	14	20	0.02	4	0.6
25WCAC025	0	1	1	665.00	161	148	501	173	0.08	17	7.9
25WCAC025	1	2	1	26.30	25	24	78	39	0.02	4	0.8
25WCAC025	2	3	1	190.00	77	62	256	83	0.04	10	3.5
25WCAC025	3	4	1	24.90	32	44	549	81	0.08	8	2.2
25WCAC025	4	5	1	19.45	44	37	420	63	0.04	10	1.9
25WCAC025	5	6	1	12.10	301	706	2,670	508	0.14	72	4.6
25WCAC025	6	7	1	5.62	329	659	1,260	375	0.09	59	2.7
25WCAC025	7	8	1	9.50	170	247	546	150	0.13	31	2.1
25WCAC026	0	1	1	148.00	128	90	127	88	0.1	1635	4.2
25WCAC026	1	2	1	77.60	75	34	75	34	0.07	5	2.5
25WCAC026	2	3	1	75.70	150	81	144	82	0.14	10	4.4
25WCAC026	3	4	1	48.80	363	142	217	117	0.28	19	2.6
25WCAC027	0	1	1	2.20	30	49	22	13	0.07	6	0.8
25WCAC027	1	2	1	0.32	20	37	28	12	0.05	5	0.7
25WCAC027	2	3	1	5.53	9	11	35	21	0.02	269	1.0
25WCAC027	3	4	1	1.38	8	11	39	16	0.02	3	0.9
25WCAC027	4	4.5	0.5	3.04	15	13	58	23	0.02	177	2.0
25WCAC028	0	1	1	1.01	20	33	34	18	0.05	12	0.9
25WCAC028	1	2	1	0.94	7	11	36	15	0.04	2	0.5
25WCAC028	2	3	1	1.50	13	18	41	20	0.03	3	0.8
25WCAC029	0	1	1	0.56	27	47	16	13	0.08	6	0.6
25WCAC029	1	2	1	0.72	64	107	26	33	0.11	11	0.7
25WCAC029	2	3	1	0.36	26	53	25	12	0.07	14	0.6
25WCAC029	3	4	1	0.41	10	13	36	12	0.02	3	0.9
25WCAC029	4	5	1	0.92	10	15	31	10	0.02	6	1.2
25WCAC029	5	5.5	0.5	2.91	14	17	37	21	0.06	25	2.5
25WCAC030	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC030	2	4	2	0.12	57	496	5	29	0.03	55	0.3
25WCAC030	4	6	2	0.69	59	126	19	35	0.04	76	1.5
25WCAC031	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC031	3	5	2	0.06	72	318	6	41	0.03	45	0.5
25WCAC031	5	7	2	0.06	490	586	6	55	0.15	65	0.5
25WCAC031	7	9	2	0.07	920	776	7	83	0.1	88	0.4
25WCAC031	9	12	3	0.08	730	650	6	82	0.09	74	0.3
25WCAC032	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC032	4	6	2	0.06	507	623	10	68	0.09	67	0.2
25WCAC032	6	8	2	0.03	324	585	7	85	0.09	73	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC032	8	10	2	0.21	336	539	7	76	0.05	51	0.3
25WCAC032	10	12	2	0.57	264	303	12	67	0.06	30	0.8
25WCAC032	12	14	2	0.42	271	325	64	206	0.13	49	0.7
25WCAC032	14	16	2	0.69	407	339	31	182	0.06	39	0.4
25WCAC032	16	18	2	0.88	321	280	1,565	187	0.2	37	0.8
25WCAC033	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC033	3	5	2	0.10	127	429	107	89	0.04	61	0.4
25WCAC033	5	7.5	2.5	0.42	227	409	313	287	0.06	49	0.5
25WCAC034	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC034	3	5	2	1.57	25	122	5,380	123	0.04	13	0.8
25WCAC034	5	7	2	0.60	17	25	622	69	0.03	4	1.6
25WCAC034	7	9	2	1.31	32	31	2,620	53	0.11	4	1.3
25WCAC035	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC035	2	4	2	0.21	44	420	362	53	0.03	46	0.5
25WCAC035	4	6	2	0.51	147	250	391	42	0.03	27	0.5
25WCAC036	0	6	6	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC036	6	8	2	0.04	641	819	19	69	0.12	77	0.1
25WCAC036	8	10	2	0.06	929	944	11	79	0.07	80	0.3
25WCAC036	10	12	2	0.06	817	959	11	80	0.07	74	0.2
25WCAC036	12	14	2	0.39	812	906	178	91	0.1	72	0.6
25WCAC036	14	16	2	0.05	721	1,135	9	79	0.09	89	0.1
25WCAC036	16	18	2	0.03	502	954	3	75	0.05	73	0.1
25WCAC036	18	20	2	0.07	478	1,085	3	80	0.05	89	0.1
25WCAC036	20	22	2	0.10	354	630	7	82	0.06	68	0.2
25WCAC036	22	24	2	0.30	687	812	5	93	0.09	84	0.3
25WCAC036	24	27	3	0.57	1,130	830	8	116	0.1	85	1.0
25WCAC037	0	1	1	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC037	1	3	2	0.30	72	254	21	34	0.05	23	0.4
25WCAC038	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC038	2	4	2	0.34	227	376	35	48	0.08	35	0.6
25WCAC038	4	6	2	0.69	275	189	37	68	0.26	16	1.2
25WCAC039	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC039	2	4	2	0.07	73	534	10	40	0.05	63	0.4
25WCAC039	4	6	2	0.09	143	252	8	59	0.02	42	0.3
25WCAC039	6	8	2	0.09	356	474	8	91	0.04	70	0.5
25WCAC039	8	10	2	0.14	410	575	5	86	0.07	77	0.4
25WCAC039	10	12	2	0.16	714	642	6	88	0.13	87	1.7
25WCAC039	12	14	2	0.19	689	648	4	94	0.13	82	0.4
25WCAC039	14	16	2	0.21	506	629	5	91	0.08	75	0.4
25WCAC039	16	18	2	0.17	795	701	8	95	0.11	80	0.3
25WCAC039	18	21	3	0.23	426	717	3	84	0.07	80	0.4
25WCAC040	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC040	2	4	2	0.05	622	794	7	38	0.09	107	0.3
25WCAC040	4	6	2	0.15	517	1,035	9	91	0.15	115	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC040	6	8	2	0.31	967	1,445	10	97	0.15	143	0.4
25WCAC040	8	10	2	0.58	2,780	1,665	14	94	0.18	174	0.6
25WCAC040	10	12	2	0.31	2,440	1,935	7	125	0.13	183	0.6
25WCAC040	12	14	2	0.79	597	790	12	97	0.1	76	0.4
25WCAC040	14	16	2	0.20	573	842	16	109	0.16	78	0.4
25WCAC040	16	19	3	0.23	464	743	38	194	0.1	73	0.3
25WCAC041	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC041	4	6	2	0.03	115	510	3	50	0.02	59	0.2
25WCAC041	6	8	2	0.04	109	617	2	59	0.02	67	0.1
25WCAC041	8	10	2	0.05	81	640	1	70	0.01	72	0.1
25WCAC041	10	12	2	0.03	76	580	1	70	0.01	70	0.1
25WCAC041	12	14	2	0.03	114	686	1	72	0.02	73	0.2
25WCAC041	14	16	2	0.02	93	805	1	68	0.01	75	0.2
25WCAC041	16	18	2	0.09	156	658	5	83	0.03	67	0.4
25WCAC041	18	20	2	0.05	100	748	2	77	0.02	80	0.2
25WCAC041	20	22	2	0.04	98	1,130	1	76	0.02	106	0.3
25WCAC041	22	25	3	0.05	86	1,005	2	79	0.01	101	0.3
25WCAC042	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC042	4	6	2	0.52	264	298	13	91	0.02	51	0.6
25WCAC042	6	8	2	0.81	179	193	6	114	0.01	45	0.4
25WCAC042	8	10	2	2.01	437	334	32	132	0.02	48	0.4
25WCAC042	10	12	2	1.21	264	244	12	122	0.03	47	0.5
25WCAC042	12	14	2	0.60	125	141	4	109	0.02	44	0.5
25WCAC042	14	15	1	0.45	174	493	7	142	0.06	61	0.7
25WCAC042	15	16	1	0.23	375	1,535	19	309	0.02	119	0.8
25WCAC042	16	17	1	0.31	252	962	23	582	0.03	77	0.3
25WCAC042	17	18	1	0.68	66	301	25	151	0.02	25	0.8
25WCAC043	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC043	3	4	1	0.08	289	604	6	55	0.06	87	0.9
25WCAC043	4	5	1	0.11	293	648	3	61	0.03	64	0.1
25WCAC043	5	6	1	0.21	1,885	1,765	9	92	0.59	130	0.5
25WCAC043	6	7	1	0.19	4,770	1,845	6	142	0.26	139	0.4
25WCAC043	7	8	1	0.17	1,840	8,750	10	173	0.08	561	0.4
25WCAC043	8	9	1	0.42	3,550	7,390	11	91	1.42	309	3.0
25WCAC043	9	10	1	0.30	840	2,720	5	104	0.1	151	0.6
25WCAC043	10	12	2	0.45	536	561	3	89	0.08	73	0.2
25WCAC043	12	14	2	0.28	225	1,015	5	86	0.04	87	0.3
25WCAC043	14	16	2	0.38	201	1,060	3	102	0.05	87	0.8
25WCAC043	16	18	2	0.69	241	442	5	149	0.04	63	1.1
25WCAC044	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC044	4	6	2	0.08	240	609	4	59	0.04	78	0.3
25WCAC044	6	8	2	0.10	341	592	4	88	0.04	76	0.2
25WCAC044	8	10	2	0.18	413	553	5	97	0.05	78	0.2
25WCAC044	10	12	2	0.36	595	520	10	114	0.11	85	0.2

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC044	12	14	2	0.30	511	395	5	97	0.07	71	0.2
25WCAC044	14	16	2	0.30	606	475	5	97	0.1	77	0.3
25WCAC044	16	19	3	0.50	614	580	9	104	0.11	81	0.5
25WCAC045	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC045	4	6	2	0.03	292	788	2	60	0.04	75	0.1
25WCAC045	6	8	2	0.23	237	647	2	62	0.02	68	0.1
25WCAC045	8	10	2	0.10	139	654	2	66	0.03	70	0.2
25WCAC045	10	12	2	0.17	225	781	2	68	0.03	67	0.2
25WCAC045	12	14	2	0.13	321	742	2	103	0.03	73	0.2
25WCAC045	14	16	2	0.27	333	867	3	70	0.02	73	0.1
25WCAC045	16	18	2	0.43	881	1,360	2	65	0.06	89	0.2
25WCAC045	18	20	2	1.51	1,765	1,705	3	64	0.12	87	0.1
25WCAC045	20	22	2	0.28	1,195	1,160	2	56	0.1	74	0.2
25WCAC045	22	24	2	0.45	1,110	915	2	54	0.06	84	0.2
25WCAC045	24	26	2	1.63	1,105	1,135	1	64	0.04	89	0.3
25WCAC045	26	28	2	0.58	786	714	1	73	0.05	75	0.3
25WCAC045	28	30	2	0.38	621	806	5	105	0.06	80	0.4
25WCAC045	30	31	1	0.49	779	706	3	140	0.06	81	1.0
25WCAC045	31	32	1	0.16	221	571	4	119	0.05	62	0.5
25WCAC045	32	33	1	0.33	244	762	63	110	0.16	65	1.2
25WCAC045	33	34	1	0.25	138	807	33	194	0.06	67	1.7
25WCAC045	34	35	1	0.34	410	574	21	114	0.05	56	1.2
25WCAC045	35	36	1	0.27	111	157	24	66	0.04	15	4.0
25WCAC046	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC046	4	6	2	0.02	147	649	1	64	0.01	73	0.1
25WCAC046	6	8	2	0.04	147	643	2	74	0.02	80	0.2
25WCAC046	8	10	2	0.08	175	616	2	71	0.01	75	0.2
25WCAC046	10	12	2	0.05	200	719	1	72	0.01	76	0.1
25WCAC046	12	14	2	0.06	134	780	1	67	0.01	78	0.2
25WCAC046	14	16	2	0.10	177	727	1	70	0.02	82	0.3
25WCAC046	16	18	2	0.11	136	675	1	65	0.02	75	0.1
25WCAC046	18	20	2	0.11	125	617	1	73	0.02	74	0.4
25WCAC046	20	22	2	0.07	111	596	1	57	0.02	73	0.2
25WCAC046	22	24	2	0.16	114	399	66	141	0.02	50	0.5
25WCAC046	24	26	2	0.14	152	668	3	73	0.02	81	3.3
25WCAC046	26	27	1	0.10	109	639	3	71	0.01	85	0.2
25WCAC046	27	28	1	0.16	128	597	8	106	0.03	93	0.4
25WCAC046	28	29	1	0.15	109	644	13	87	0.03	88	0.3
25WCAC046	29	30	1	0.13	108	745	12	184	0.02	70	1.0
25WCAC047	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC047	4	6	2	0.19	92	1,170	2	80	0.02	109	0.2
25WCAC047	6	8	2	0.03	717	1,895	4	86	0.06	117	0.1
25WCAC047	8	10	2	0.06	1,670	2,300	13	86	0.19	133	0.2
25WCAC047	10	12	2	0.05	104	484	1	54	0.02	57	0.1

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC047	12	13	1	0.09	89	474	2	57	0.02	59	0.1
25WCAC047	13	14	1	0.07	169	568	2	64	0.05	56	0.2
25WCAC047	14	15	1	0.31	291	1,005	2	74	0.04	102	0.2
25WCAC047	15	16	1	0.12	159	1,205	2	78	0.02	127	0.1
25WCAC047	16	17	1	0.28	109	1,320	2	88	0.01	131	0.2
25WCAC047	17	18	1	0.13	208	1,250	1	84	0.02	122	0.1
25WCAC047	18	20	2	0.10	97	1,025	1	65	0.02	99	0.1
25WCAC047	20	22	2	0.04	68	948	1	65	0.01	98	0.1
25WCAC047	22	24	2	0.11	67	913	1	63	0.01	95	0.2
25WCAC047	24	26	2	0.09	49	748	1	61	0.01	79	0.3
25WCAC047	26	28	2	0.05	49	712	1	57	0.02	76	0.3
25WCAC047	28	30	2	0.08	56	688	1	60	0.01	80	0.2
25WCAC048	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC048	4	6	2	0.02	45	627	1	54	0.01	70	0.1
25WCAC048	6	8	2	0.02	55	557	1	57	0.01	64	0.1
25WCAC048	8	10	2	0.02	47	585	1	63	0.01	71	0.1
25WCAC048	10	12	2	0.06	47	655	2	68	0.01	80	0.1
25WCAC048	12	14	2	0.05	60	612	2	64	0.01	74	0.1
25WCAC048	14	16	2	0.02	31	601	5	57	BD	72	0.1
25WCAC048	16	18	2	0.04	61	627	1	65	0.01	76	0.1
25WCAC048	18	20	2	0.05	51	682	1	63	0.02	77	0.2
25WCAC048	20	22	2	0.04	75	650	1	60	0.01	71	0.1
25WCAC048	22	24	2	0.11	204	1,000	1	75	0.01	106	0.2
25WCAC048	24	26	2	0.11	183	890	1	79	0.01	97	0.2
25WCAC048	26	28	2	0.12	113	1,215	1	74	0.03	121	0.3
25WCAC048	28	30	2	0.11	116	1,465	1	86	0.01	128	0.2
25WCAC048	30	32	2	0.07	96	1,525	1	89	0.01	131	0.3
25WCAC048	32	34	2	0.17	164	1,600	1	95	0.02	132	0.5
25WCAC048	34	36	2	0.16	182	600	2	66	0.03	68	0.4
25WCAC048	36	38	2	0.07	133	548	1	60	0.02	67	0.4
25WCAC048	38	40	2	0.11	130	840	1	64	0.01	93	0.2
25WCAC048	40	42	2	0.09	92	770	1	76	0.01	87	0.2
25WCAC048	42	44	2	0.10	58	629	1	70	0.06	81	0.2
25WCAC048	44	46	2	0.17	119	568	12	71	0.04	81	0.2
25WCAC048	46	48	2	0.14	52	416	14	125	0.02	40	0.4
25WCAC049	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC049	4	6	2	0.06	99	947	1	80	0.01	83	0.1
25WCAC049	6	8	2	0.04	71	765	1	76	0.01	85	0.2
25WCAC049	8	10	2	0.04	33	674	1	72	BD	77	0.2
25WCAC049	10	12	2	BD	35	614	1	66	BD	79	BD
25WCAC049	12	13	1	0.04	68	691	1	71	0.02	82	0.1
25WCAC049	13	14	1	0.06	74	660	2	72	0.01	80	0.2
25WCAC049	14	15	1	0.04	64	654	1	70	0.01	78	0.1
25WCAC049	15	16	1	0.06	63	708	1	72	0.01	84	0.2

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC049	16	17	1	0.06	11	659	1	64	0.01	74	0.2
25WCAC049	17	18	1	0.17	44	699	1	65	0.01	78	0.1
25WCAC049	18	19	1	0.10	68	691	1	67	0.01	77	0.1
25WCAC049	19	20	1	0.02	46	652	1	60	0.01	72	0.1
25WCAC049	20	21	1	0.03	53	684	1	68	0.01	78	0.1
25WCAC049	21	22	1	0.03	53	657	1	62	BD	72	0.3
25WCAC049	22	23	1	0.06	52	747	1	65	0.01	79	0.2
25WCAC049	23	24	1	0.03	58	795	1	69	0.01	84	0.2
25WCAC049	24	25	1	0.04	126	737	1	67	0.01	76	0.3
25WCAC049	25	26	1	0.10	134	730	1	70	0.02	82	0.2
25WCAC049	26	27	1	0.04	98	702	1	73	0.01	80	0.2
25WCAC049	27	28	1	0.10	145	725	1	68	0.02	78	0.2
25WCAC049	28	29	1	0.21	308	737	1	65	0.05	74	0.2
25WCAC049	29	30	1	0.06	173	706	1	66	0.02	75	0.3
25WCAC050	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC050	4	6	2	BD	93	519	1	51	0.01	58	0.2
25WCAC050	6	8	2	0.02	394	634	1	49	0.03	57	BD
25WCAC050	8	10	2	0.08	210	917	1	62	0.03	96	0.1
25WCAC050	10	12	2	0.03	87	1,115	6	68	0.01	115	0.1
25WCAC050	12	14	2	0.01	53	698	1	66	BD	85	0.1
25WCAC050	14	16	2	0.03	76	707	1	63	0.01	84	0.1
25WCAC050	16	18	2	0.02	43	714	1	67	BD	89	0.1
25WCAC050	18	20	2	0.02	41	720	1	69	BD	87	0.1
25WCAC051	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC051	4	6	2	0.03	39	786	1	70	0.01	87	0.2
25WCAC051	6	8	2	0.01	36	783	1	65	BD	88	0.1
25WCAC051	8	10	2	0.02	36	794	1	64	BD	90	0.1
25WCAC051	10	12	2	0.02	44	760	2	63	BD	86	0.1
25WCAC051	12	14	2	0.11	71	680	1	73	BD	85	0.1
25WCAC051	14	16	2	0.04	38	649	1	66	BD	82	0.1
25WCAC051	16	18	2	0.06	48	632	1	66	BD	80	0.1
25WCAC051	18	20	2	0.07	35	628	1	65	BD	81	0.1
25WCAC052	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC052	2	3	1	0.12	43	700	5	50	0.02	64	0.1
25WCAC052	3	4	1	0.03	48	744	2	55	0.01	70	0.2
25WCAC052	4	5	1	0.14	91	855	2	81	0.01	77	0.1
25WCAC052	5	6	1	0.05	52	589	2	60	0.01	66	0.1
25WCAC052	6	7	1	0.01	85	791	2	77	0.01	78	0.1
25WCAC052	7	8	1	0.01	135	1,090	1	90	0.01	89	0.1
25WCAC052	8	10	2	BD	123	1,245	1	90	0.01	96	0.1
25WCAC052	10	12	2	0.07	51	783	2	75	BD	82	0.1
25WCAC052	12	14	2	0.03	68	677	1	68	BD	85	0.1
25WCAC052	14	16	2	0.04	54	596	1	60	BD	79	0.1
25WCAC052	16	18	2	0.02	42	658	1	66	0.01	85	0.1

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC052	18	20	2	0.04	43	671	1	63	BD	84	0.1
25WCAC053	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC053	4	6	2	0.04	47	648	1	61	BD	75	0.2
25WCAC053	6	8	2	0.09	39	647	1	65	BD	78	0.2
25WCAC053	8	10	2	0.02	29	620	1	63	BD	80	0.1
25WCAC053	10	12	2	0.04	45	645	1	61	BD	76	0.1
25WCAC053	12	14	2	0.01	42	702	1	65	0.01	84	0.1
25WCAC053	14	16	2	0.09	26	610	1	61	BD	77	0.1
25WCAC054	0	6	6	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC054	6	9	3	0.02	36	569	1	65	0.01	73	BD
25WCAC054	9	11	2	0.04	43	579	1	64	0.01	74	0.1
25WCAC054	11	13	2	0.04	42	547	1	74	0.01	74	0.1
25WCAC054	13	15	2	0.09	68	683	2	64	0.01	80	0.1
25WCAC054	15	17	2	0.07	69	758	1	58	0.01	81	BD
25WCAC054	17	19	2	0.06	117	956	1	64	0.01	90	0.1
25WCAC054	19	21	2	0.06	352	1,375	1	66	0.04	102	0.1
25WCAC054	21	23	2	0.08	99	818	1	72	0.01	83	0.1
25WCAC054	23	25	2	0.09	117	1,295	1	77	0.02	117	0.1
25WCAC054	25	27	2	0.11	110	1,115	2	83	0.01	111	0.1
25WCAC054	27	29	2	0.08	93	891	1	75	0.01	98	0.2
25WCAC054	29	31	2	0.13	107	1,000	1	80	0.01	99	0.2
25WCAC054	31	33	2	0.12	65	609	1	68	0.01	71	0.2
25WCAC055	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC055	4	6	2	0.02	58	734	1	70	0.01	73	0.1
25WCAC055	6	8	2	0.03	81	965	1	72	0.01	89	0.1
25WCAC055	8	10	2	0.11	110	1,450	1	81	0.01	124	0.4
25WCAC055	10	12	2	0.13	102	1,485	1	72	0.02	135	0.1
25WCAC055	12	14	2	0.11	110	1,365	2	83	0.01	125	0.2
25WCAC055	14	16	2	0.04	66	673	1	83	0.01	80	0.1
25WCAC055	16	18	2	0.07	140	1,170	1	88	0.02	88	0.1
25WCAC055	18	20	2	0.06	104	925	3	81	0.02	98	0.1
25WCAC055	20	22	2	0.37	95	1,025	3	82	0.01	109	0.1
25WCAC055	22	24	2	0.58	81	790	1	72	0.01	82	0.1
25WCAC055	24	26	2	0.20	85	573	2	77	0.04	72	0.2
25WCAC055	26	28	2	0.16	76	672	1	83	0.02	79	0.2
25WCAC055	28	30	2	0.13	73	683	2	69	0.02	82	0.2
25WCAC055	30	32	2	0.13	74	724	1	79	0.01	87	0.3
25WCAC055	32	34	2	0.06	73	643	1	78	0.01	82	0.3
25WCAC055	34	36	2	0.34	192	637	1	76	0.03	70	0.3
25WCAC055	36	38	2	0.25	354	953	3	67	0.03	89	0.4
25WCAC055	38	40	2	0.07	37	690	1	87	BD	82	0.2
25WCAC055	40	42	2	0.14	87	606	6	84	0.01	71	0.2
25WCAC055	42	44	2	0.13	106	576	1	88	0.01	73	0.3
25WCAC055	44	46	2	0.11	68	720	1	87	0.01	87	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC055	46	48	2	0.28	294	876	3	69	0.02	82	0.2
25WCAC055	48	51	3	0.15	165	831	2	65	0.01	82	0.2
25WCAC056	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC056	2	4	2	0.40	43	630	1	64	0.01	135	0.4
25WCAC056	4	6	2	0.13	46	713	2	69	0.02	82	0.2
25WCAC056	6	8	2	0.12	47	661	1	67	0.01	77	0.2
25WCAC057	0	2	2	0.06	70	568	3	59	0.02	65	0.2
25WCAC057	2	4	2	0.04	66	608	2	68	0.01	277	0.5
25WCAC057	4	6	2	0.05	57	691	2	72	0.01	89	0.2
25WCAC057	6	8	2	0.09	83	743	2	84	0.02	81	0.3
25WCAC058	0	3	3	0.02	79	641	3	62	0.01	71	0.2
25WCAC058	3	5	2	0.03	86	661	5	64	0.02	73	0.3
25WCAC058	5	7	2	0.04	105	746	8	72	0.05	73	0.2
25WCAC058	7	9	2	0.13	137	767	4	71	0.04	76	0.1
25WCAC058	9	11	2	0.38	173	856	2	78	0.04	84	0.2
25WCAC059	0	1	1	0.21	119	453	19	35	0.07	27	0.4
25WCAC059	1	2	1	0.21	225	499	11	55	0.06	46	0.8
25WCAC059	2	3	1	0.12	204	837	5	61	0.07	84	0.4
25WCAC059	3	4	1	0.35	274	697	7	78	0.07	74	0.9
25WCAC060	0	1	1	0.25	287	697	3	55	0.05	67	0.3
25WCAC060	1	2	1	0.24	177	692	4	65	0.04	70	0.4
25WCAC060	2	3	1	0.13	196	916	3	70	0.04	87	0.3
25WCAC060	3	4	1	0.72	330	1,000	3	67	0.07	82	0.5
25WCAC060	4	5	1	0.43	295	971	4	87	0.06	84	0.4
25WCAC060	5	6	1	1.00	385	990	6	105	0.1	83	0.4
25WCAC060	6	7	1	0.32	339	1,035	8	86	0.06	88	0.4
25WCAC060	7	8	1	0.12	207	929	2	73	0.05	86	0.2
25WCAC060	8	9	1	0.23	113	901	15	81	0.02	89	0.4
25WCAC060	9	10	1	0.23	271	873	3	75	0.05	79	1.0
25WCAC060	10	11	1	0.28	268	872	12	120	0.06	68	0.5
25WCAC060	11	12	1	1.24	2,010	2,480	15	92	0.46	107	1.0
25WCAC060	12	13	1	0.30	414	735	9	81	0.16	71	0.5
25WCAC061	0	2	2	0.12	203	759	5	58	0.07	69	0.4
25WCAC061	2	4	2	0.37	365	971	12	79	0.18	87	0.3
25WCAC061	4	6	2	0.33	358	778	11	89	0.15	74	0.4
25WCAC061	6	8	2	0.55	480	883	12	77	0.15	72	0.4
25WCAC061	8	10	2	0.37	415	944	6	88	0.08	103	0.6
25WCAC062	0	2	2	0.14	111	695	1	60	0.03	79	0.2
25WCAC062	2	4	2	0.37	199	702	3	59	0.04	72	0.3
25WCAC062	4	6	2	0.18	174	682	1	78	0.03	83	0.2
25WCAC062	6	8	2	0.24	305	811	2	82	0.05	84	0.2
25WCAC062	8	10	2	0.16	373	942	1	76	0.05	87	0.2
25WCAC062	10	12	2	0.27	750	1,020	4	82	0.13	90	0.3
25WCAC062	12	14	2	0.25	292	727	4	78	0.07	80	0.3

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC062	14	16	2	0.30	298	824	9	85	0.14	74	0.4
25WCAC062	16	18	2	0.21	166	796	4	61	0.06	84	0.3
25WCAC063	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC063	3	5	2	0.13	330	1,455	1	78	0.03	114	0.1
25WCAC063	5	7	2	0.15	413	1,020	1	80	0.06	94	0.2
25WCAC063	7	9	2	0.73	113	771	1	65	0.02	89	0.2
25WCAC063	9	11	2	0.09	105	655	1	59	0.01	72	0.2
25WCAC063	11	13	2	0.07	108	740	1	61	0.02	83	0.2
25WCAC063	13	15	2	0.03	95	666	1	54	0.03	76	0.2
25WCAC063	15	17	2	0.20	579	952	6	55	0.06	81	0.2
25WCAC063	17	19.5	2.5	0.56	821	1,260	98	61	0.4	92	0.2
25WCAC064	0	1	1	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC064	1	3	2	0.06	187	500	4	76	0.04	72	0.1
25WCAC064	3	5	2	0.08	201	771	2	80	0.03	85	0.3
25WCAC064	5	7	2	0.09	139	756	1	68	0.03	88	0.1
25WCAC064	7	9	2	0.05	97	751	1	60	0.02	81	0.3
25WCAC064	9	11	2	0.25	411	844	2	62	0.05	82	0.2
25WCAC064	11	13	2	0.42	281	731	1	69	0.04	187	1.2
25WCAC065	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC065	4	6	2	0.14	370	1,380	1	79	0.05	136	0.1
25WCAC065	6	8	2	0.10	315	1,705	1	83	0.04	145	0.1
25WCAC065	8	10	2	0.14	445	1,385	1	76	0.05	127	0.2
25WCAC065	10	12	2	0.40	494	1,060	3	65	0.07	98	0.3
25WCAC065	12	14	2	0.53	858	1,340	2	78	0.1	102	0.3
25WCAC065	14	16	2	0.62	1,070	1,635	2	83	0.14	121	0.4
25WCAC065	16	18	2	1.29	2,380	2,700	1	75	0.26	134	0.3
25WCAC065	18	20	2	1.87	3,690	3,900	2	68	0.42	156	0.4
25WCAC066	0	2	2	0.11	1,380	1,470	2	66	0.19	104	0.2
25WCAC066	2	4	2	0.22	1,185	1,325	2	65	0.16	110	0.2
25WCAC066	4	6	2	0.41	674	1,535	2	80	0.11	99	0.1
25WCAC066	6	8	2	0.49	463	1,900	2	91	0.11	115	0.2
25WCAC066	8	10	2	0.29	838	1,515	2	74	0.18	143	0.1
25WCAC066	10	12	2	0.34	802	1,695	2	90	0.15	143	0.2
25WCAC066	12	14	2	0.40	435	1,850	1	101	0.1	139	0.1
25WCAC066	14	16	2	0.72	659	2,030	15	100	0.16	124	0.3
25WCAC066	16	18	2	0.67	1,420	1,425	4	87	0.18	99	0.2
25WCAC066	18	20	2	0.56	1,500	1,715	3	72	0.22	134	0.5
25WCAC066	20	22	2	0.43	1,180	1,050	3	91	0.23	89	0.3
25WCAC066	22	24	2	0.70	1,480	1,495	8	62	0.33	89	0.7
25WCAC067	0	2	2	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC067	2	4	2	0.11	319	863	7	60	0.07	77	0.2
25WCAC067	4	6	2	0.16	651	967	6	71	0.11	84	0.4
25WCAC067	6	8	2	0.18	206	572	5	68	0.03	72	0.3
25WCAC067	8	10	2	0.35	396	793	4	80	0.05	86	0.2

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC067	10	12	2	0.26	387	587	4	89	0.04	86	0.2
25WCAC068	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC068	4	6	2	0.05	273	637	2	40	0.03	59	0.2
25WCAC068	6	8	2	0.24	600	1,030	1	55	0.05	78	0.1
25WCAC068	8	10	2	0.05	454	904	2	60	0.04	67	0.1
25WCAC068	10	12	2	0.08	597	1,025	4	63	0.11	70	0.1
25WCAC068	12	14	2	0.05	506	979	3	61	0.08	69	0.3
25WCAC068	14	16	2	0.04	253	895	1	84	0.02	78	0.1
25WCAC068	16	18	2	0.03	284	936	5	65	0.04	83	0.1
25WCAC068	18	20	2	0.05	191	752	2	74	0.03	79	0.2
25WCAC068	20	22	2	0.04	263	896	3	78	0.04	95	0.1
25WCAC068	22	24	2	0.09	276	741	1	82	0.04	86	0.2
25WCAC068	24	26	2	0.05	288	796	1	77	0.03	88	0.1
25WCAC068	26	28	2	0.12	418	880	1	82	0.02	83	0.2
25WCAC068	28	31	3	0.10	266	833	1	81	0.04	82	0.1
25WCAC069	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC069	4	6	2	0.04	71	612	1	51	0.01	70	0.2
25WCAC069	6	8	2	0.06	105	745	1	67	0.02	71	0.3
25WCAC069	8	10	2	0.07	115	1,180	1	81	0.03	89	0.3
25WCAC069	10	12	2	0.14	125	1,335	1	94	0.04	99	0.3
25WCAC069	12	14	2	0.12	142	1,115	1	89	0.02	90	0.2
25WCAC069	14	16	2	0.10	148	1,050	1	91	0.03	84	0.2
25WCAC069	16	18	2	0.08	149	1,050	1	97	0.02	89	0.2
25WCAC069	18	20	2	0.11	111	915	1	81	0.02	85	0.3
25WCAC069	20	22	2	0.06	76	808	1	75	0.01	84	0.2
25WCAC069	22	24	2	0.02	56	789	1	69	0.01	81	0.3
25WCAC070	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC070	3	5	2	0.05	526	595	3	69	0.05	79	0.1
25WCAC070	5	7	2	0.13	627	588	6	78	0.08	76	0.2
25WCAC070	7	9	2	0.10	483	564	2	83	0.04	75	0.1
25WCAC070	9	11	2	0.12	585	599	11	91	0.07	74	0.2
25WCAC070	11	13	2	0.17	376	460	7	83	0.05	69	0.2
25WCAC070	13	15	2	0.17	307	476	5	82	0.03	68	0.2
25WCAC071	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC071	4	6	2	0.08	143	209	10	66	0.02	40	0.4
25WCAC071	6	8	2	0.16	205	200	14	108	0.02	44	0.5
25WCAC071	8	10	2	0.19	429	440	20	105	0.06	61	0.6
25WCAC071	10	12	2	0.27	545	618	11	98	0.1	72	0.4
25WCAC071	12	14	2	39.30	415	491	15	121	0.1	648	1.6
25WCAC072	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC072	3	5	2	0.29	612	627	14	75	0.11	99	1.1
25WCAC072	5	7	2	0.28	446	635	9	66	0.09	68	0.5
25WCAC072	7	9	2	0.53	624	719	11	106	0.1	62	0.6
25WCAC072	9	12	3	1.07	422	132	20	70	0.16	33	0.9

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Cu (ppm)	Ni (ppm)	Pb (ppm)	Zn (ppm)	Bi (ppm)	Co (ppm)	Mo (ppm)
25WCAC073	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC073	3	4	1	0.05	74	518	3	27	0.03	53	0.2
25WCAC073	4	5	1	0.10	1,045	854	8	27	0.09	75	2.5
25WCAC073	5	6	1	0.31	1,480	690	18	41	0.36	56	6.8
25WCAC073	6	7	1	1.24	397	212	124	39	0.25	23	1.7
25WCAC074	0	4	4	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC074	4	5	1	0.05	455	513	4	38	0.07	58	0.1
25WCAC074	5	6	1	0.05	516	508	3	33	0.04	56	0.2
25WCAC074	6	7	1	0.08	577	1,155	5	114	0.08	131	0.3
25WCAC074	7	8	1	2.06	666	359	18	66	0.21	36	0.6
25WCAC074	8	9	1	2.14	421	345	42	74	0.25	40	0.8
25WCAC075	0	3	3	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC075	3	5	2	0.36	382	550	9	46	0.07	61	0.4
25WCAC075	5	7	2	0.46	368	815	14	80	0.09	61	0.5
25WCAC076	0	5	5	NA	NA	NA	NA	NA	NA	NA	NA
25WCAC076	5	7	2	0.08	752	738	9	84	0.14	90	0.2
25WCAC076	7	9	2	0.06	729	703	16	89	0.11	90	0.2
25WCAC076	9	11	2	0.07	620	700	11	97	0.07	83	0.2
25WCAC076	11	13	2	0.09	568	591	4	87	0.09	74	0.3
25WCAC076	13	15	2	0.13	756	639	4	95	0.11	87	0.4
25WCAC076	15	17	2	0.14	821	698	8	93	0.14	97	0.3
25WCAC076	17	19	2	0.13	807	665	8	94	0.11	81	0.3
25WCAC076	19	20	1	0.24	245	606	3	66	0.04	73	0.7
25WCAC076	20	21	1	0.71	1,025	842	6	75	0.11	98	0.4
25WCAC076	21	22	1	1.03	1,570	1,030	7	72	0.18	115	0.5
25WCAC076	22	23	1	0.51	673	644	5	61	0.08	77	0.3
25WCAC076	23	24	1	0.51	513	668	6	71	0.08	69	0.4
25WCAC076	24	25	1	0.21	146	509	6	74	0.06	50	0.4
25WCAC076	25	26	1	0.43	206	1,215	3	94	0.04	99	0.6
25WCAC076	26	27	1	0.76	201	498	80	174	0.05	48	0.7
25WCAC076	27	28	1	1.39	87	140	65	61	0.02	15	1.3

Notes: intervals are down hole lengths not true widths; NA is not assayed or sampled; BD is below detection

Appendix 4: JORC Code, 2012 – Table 1 - Elizabeth Hill Aircore Drill Assay Results

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	• Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. • Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. • Aspects of the determination of mineralisation that are Material to the Public Report. • In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	• Wallis Drilling was engaged to complete aircore drilling at the Elizabeth Hill Silver Project using the Mantis 200 drill rig. • Aircore drilling aimed to obtain 1m geochemical samples at prospects under cover material. • A hydraulic rotary sample splitter on the rig was used to obtain a representative 2kg – 3kg sample of every metre drilled in a pre-numbered calico bag. The bags were placed on the ground next to the remainder of the 1m sample that was collected in a bucket. The samples were placed in order in rows of 10 samples. • Samples of each metre drilled were sieved and representative chip samples were collected and placed in numbered chip trays. • When small amounts of water were encountered in the hole, samples continued to be collected with care taken to obtain as representative a sample per metre as possible. Notes were made on logging sheets where water was intersected in a drill hole. Any contamination was also recorded in the drill logs. • For most holes, sample compositing was completed on 2m intervals, however there were some 3m sample intervals. When compositing, a uniquely numbered calico bag was used and the sample was collected by using a scoop through the sample pile to ensure the sample was as representative as possible. • Certified Reference Material (CRM) standards, and blanks were inserted approximately every 25 and 50 samples, respectively. No field duplicates were collected as the drilling was deemed reconnaissance in nature. • Samples were oven dried as required, fine crushed to 90% passing 3.15mm, pulverised, and split to obtain a nominal 500g sub sample for assaying. The remainder of the sample was to be retained as a coarse reject.
Drilling techniques	• Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• Aircore drilling was completed by Wallis Drilling. • Holes were drilled at various azimuths and dips to varying depths. • Hole diameter was BQ size (56mm). • Sample returns up innertube, preventing cross contamination. Cores up to 300mm long can be cut in favourable ground, otherwise, sample is returned in large chips.

Criteria	JORC Code explanation	Commentary
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• A semi-qualitative estimate of drill sample recovery was recorded in the drill logs. • Some drill intervals were wet and were recorded in the drill logs. • No recognisable relationship exists between sample recovery and assay grade.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• All aircore drill holes have been geologically logged for lithology, weathering, rock type, alteration, mineralisation, shearing & foliation, and any other features of the samples using sieved rock chips from the drill sample piles. The level of geological detail is commensurate with the nature and limitations of this reconnaissance drilling technique. • The geological logs for all drill holes can be considered qualitative in nature. • Representative chips of each metre drilled were collected and placed in numbered chip trays. • The chip trays were photographed wet.
Subsampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all subsampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• A hydraulic rotary sample splitter on the aircore rig was used to obtain a representative 2kg – 3kg sample of every metre drilled in a pre-numbered calico bag. • Based on geological logging, selected 1m samples were collected per hole for silver assaying, as part of a 48 element suite, with the remainder of the 1m samples secured as back up to any composite samples collected in the same hole. If a hole was partially or not sampled on a 1m basis, the rest of the hole was sampled as 2m or 3m composites. • All sampling excluded the transported cover rocks. • When compositing, a uniquely numbered calico bag was used and the sample was collected by using a scoop through the sample pile to ensure the sample was as representative as possible. • One metre, and two and three metre composite samples were sent to the ALS Geochemistry laboratory in Perth for analysis of 48 elements, including Ag, by method ME-MS61L. • Samples were oven dried as required, fine crushed to 90% passing 3.15mm, pulverised, and split to obtain a nominal 500g sub sample for assaying. The remainder of the sample was to be retained as a coarse reject. • Certified Reference Material (CRM) standards (OREAS 608b & 611b), and blanks were inserted approximately every 25 and 50 samples, respectively. No field duplicates were collected as the drilling was deemed reconnaissance in nature. • The 2kg – 3kg sample size is considered appropriate for the material being sampled.
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	• Laboratory samples were analysed at ALS laboratories (Perth) for 48 elements, four acid digestion and Inductively coupled plasma mass spectrometry (ICP-MS) finish. Samples with above upper detection limit analyses (>100g/t Ag) were then

Criteria	JORC Code explanation	Commentary
	• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.	analysed at ALS Perth with Ag-OG62 (four acid, ore grade Ag), ME-OG62 (four acid ore grade elements). For Ag assays >1,500g/t Ag, samples were sent to ALS Langley (Canada) for analysis by Ag-GRA21 (Ag 30g FA-GRAV finish). • A 0.25g split of the samples were analysed with the ALS ME-MS61L method that provides ALS's lowest detection levels (0.002g/t for Ag) from a four-acid digestion with 48 elements determined by ICP-MS. • ME-MS61L is considered a near total digestion. • Standards and blanks were inserted in the sampling sequence for analysis with the ME method. • Acceptable levels of accuracy and precision have been established for all CRM standards and for all but one of the blank material. • Aircore assays are regional geochemical results that are used to identify areas for further follow up exploration, and anomalies identified generally consist of several elevated samples. The Competent Person (CP) notes minor carry-over contamination in one blank sample from the pulveriser or crusher does not affect anomaly identification.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	• Significant silver intercepts reported in this announcement were generated by ERM's Principal Structural Geologist and Geochemist and QAQC cross checking and validation completed by the Competent Person. • No historical drill holes were twinned. • Drill collar data, sample information, and logging data have been verified, compiled, and validated by ERM's Database Manager who is separate to the persons conducting the logging and sampling. • For aircore holes with significant assay results, the top 1m sample (0-1m) was field checked for potential contamination from historical mine material used for prior rehabilitation. Where contamination was noted, the top metre was excluded from calculation of significant intersections. For aircore drill holes 25WCAC001 & 2, the top 2m of these holes were not sampled, as the holes were collared on a pad created from historical mine fill.
Location of data points	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• A Mineral Resource or Ore Reserve is not determined. • Aircore drill collars were located using a differential GPS (DGPS). Expected accuracy is +/- 0.35m for northing and easting and 0.25m for RL. • Data was collected in GDA94/MGA Zone 50 and converted to GDA20/MGA Zone 50. • Topographic control is from DTM and DGPS.
Data spacing and distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	• No Mineral Resource or Ore Reserve are reported. • Drill lines were nominally spaced, 40m or 80m apart. Holes along lines were spaced 15m apart but allowance was made to close the spacing to 5m apart, dependent on the depth of the holes. • Two and three metre composite samples were collected for most holes for 48 element analysis including Ag by method ME-MS61L.

Criteria	JORC Code explanation	Commentary
	• Whether sample compositing has been applied.	
Orientation of data in relation to geological structure	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	• The aircore drilling was completed with all holes dipping at -60° on variable azimuths. • Angled drilling was used to investigate structures and the ultramafic/granite contact. Geologically described logged intersections do not represent true thickness. • The drill orientation is not expected to have introduced any sampling bias. • Aircore drilling results are used to plan further follow up drilling with reverse circulation percussion or diamond drilling techniques. The CP considers reconnaissance aircore drilling results sufficient to plan further exploration work.
Sample security	• The measures taken to ensure sample security.	• Aircore samples were transported by Company personnel to a secure yard in Karratha then freighted by a licenced transport company to the ALS Geochemistry laboratory in Perth. Sample security is by way of chain of custody.
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	• No audits or reviews of the sampling techniques has been undertaken by West Coast Silver or any independent parties. The data has been audited by ERM's Database Manager before entering into the database. The Database Manager also completed an audit of the QAQC samples.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	• The results reported in this announcement refer to aircore holes drilled on M47/342 and E47/4422. • The tenements lie within the Ngarluma Native Title claim. • The tenements are in good standing with no known impediments.
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	• The Elizabeth Hill deposit and adjoining area has been explored for Ni, Cu, PGM, base metals, Li and Ag mineralisation since 1968 when US Steel International Inc explored the area for base metals and nickel. • Massive silver was discovered in ~1994-1995 by Legend mining NL in a percussion hole drilling program. Further drilling followed and in 1997 and exploration shaft and drive was sunk by East Coast Minerals NL. • Underground mining at Elizabeth Hill was conducted in 1999-2000 with additional drilling completed by East Coast Minerals NL until the project was sold to Global Strategic Metals NL in 2012. Alien Metals Ltd purchased lease M47/342 in early 2020. • Considerable exploration for Ni, Cu, PGM was conducted by Hunter Resources dating back to the 1980s. • Helix Resources acquired the Munni Munni Project in the late 1990's and undertook a number of scoping studies. • In 2002 a SRK Mineral Resource estimate for PGE and Au was published in accordance with the JORC code. • Subsequently, Platina Resources undertook mining studies and two scoping studies for the PGE and Au mineralisation. • West Coast Silver Limited has completed two drilling programs.
Geology	• Deposit type, geological setting and style of mineralisation.	• The Elizabeth Hills silver mineralisation is structurally controlled and is located on the eastern boundary of the north-south trending Munni Munni Fault. Mineralisation has been intersected over a 100m north-south zone along the boundary of the Munni Munni Fault, plunging south along the granite contact. The zone has an east-west width of 15-20m with the high-grade core restricted to around 3m width in the region of the underground workings. The mineralised zone is separated into several pods and occurs within a quartz carbonate chalcedonic silica breccia that shows veining. The silver occurs in fine disseminations, needles, veins, nuggets and platelets up to several centimetres in diameter.

Criteria	JORC Code explanation	Commentary
Drill hole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: o easting and northing of the drill hole collar o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar o dip and azimuth of the hole o down hole length and interception depth o hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case	• Drill information relevant to this announcement has been provided above in Appendix 2.
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated	• Significant drill intersections for the aircore drilling reported in Table 1 in this announcement have been calculated using a 10g/t Ag cut-off, are length weighted, and may include up to 2m of internal dilution. A 10g/t Ag cut-off grade was calculated as reflecting anomalism, based on the reconnaissance geochemical exploration undertaken using the aircore rig. • 2025 and historical drilling composite intersections have been calculated using a 25g/t cut-off for Ag reflecting the near mine environment. • 2025 or historical drilling assay data, geochemical data, and geophysical data referenced have previously been reported. • No metal equivalents are being reported.
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').	• Drill hole intersections are not true widths due to the sub vertical geometry of the mineralised body and -60° dip of the aircore drill holes. Aircore drilling results are used to identify regional Ag anomalism to plan further follow-up drilling and exploration works.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Appropriate maps and figures have been included in the body of this announcement and Appendix 1.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results	• All relevant and material exploration data to highlight the target areas discussed have been reported or referenced. • All drill assay information relevant to this announcement has been provided above in the body of the announcement and in Appendix 3. Eight elements (Ag, Cu, Ni, Pb, Zn, Bi, Co and Mo) have been reported only in Appendix 3, as they are deemed to be spatially associated with silver mineralisation. Additional elements analysed are not considered relevant.

Criteria	JORC Code explanation	Commentary
		• Any historical drill data referenced in this announcement has been previously reported.
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	• All relevant and material exploration data for the target areas discussed, have been reported or referenced.
Further work	• The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• Further work may include but is not limited to systematic geological mapping, channel and rock chip sampling, soil sampling, pXRF analysis and mineral identification, geophysics, structural interpretation, historical data compilation, and drilling to identify suitable host rock geology and structural architecture for polymetallic mineralisation. • Diagrams are included in the body of the announcement and Appendix 1.