Drilling Success Continues at El Zorro Extending Multiple Mineralised Structures

5.00m @ 5.91g/t Au, 12.00m @ 2.68g/t Au & 7.00m @ 5.85g/t Au

- Assays received for six holes, ZDDH00041, ZDDH00043, ZDDH00044, ZDDH00047, ZDH00048 and ZDDH00050 at El Zorro further extend mineralised zone at Ternera prospect (**Ternera**).
- Holes ZDDH00041, ZDDH00043, ZDDH00047, ZDH00048 and ZDDH00050 intersected broad mineralised gold zones with high grade results being returned from multiple mineralised fault zones.
- **Significant intercepts include:**
  - **ZDDH00041**
    - **0.50m @ 29.90g/t Au from 127.50m;**
    - **5.00m @ 5.91 g/t Au from 140.00m; including**
    - **1.85m @ 15.22g/t Au from 141.65m.**
  - **ZDDH00047**
    - **104.40m @ 0.56g/t Au from 30.00m including;**
    - **37.80m @ 1.23g/t Au from 97.00m; and**
    - **2.00m @ 11.00g/t Au from 97.00m.**
  - **ZDDH00048**
    - **45.00m @ 0.54g/t Au from 45.00m including;**
    - **3.00m @ 4.18g/t Au from 80.00m**
  - **ZDDH00050**
    - **10.00m @ 1.56g/t Au from 6.00m including;**
    - **1.00m @ 10.65g/t Au;**
    - **65.00m @ 0.84g/t Au from 157.00m including;**
    - **7.00m @ 5.85g/t Au from 202.00m; and**
    - **2.50m @ 15.92g/t Au from 205.00m.**
- Holes ZDDH00041, ZDDH00043 and ZDDH00047 demonstrate the high grade and continuous nature of the CC faults in the south west sector of Ternera, and provide additional scope to add high grade resource ounces.
- Holes ZDDH00048 and ZDDH00050 extend the main high-grade gold zone at Ternera to the north west where it remains open.
- Hole ZDDH00044 confirms gold mineralisation remains open to the north requiring additional drilling.
- 44 holes completed at El Zorro, for 12,386m, with assays outstanding for 19 holes.
- Drilling continues at the Ternera with two diamond drill rigs operating 24 hours per day and given the growing scale, drilling is expected to continue into December 2020.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

Tesoro Resources Limited (Tesoro or **the Company)** (ASX: TSO) is pleased to announce assay results for six diamond drill holes completed at Ternera on the Company's El Zorro Gold Project (**El Zorro**) in Chile, all of which returned positive results, intersecting multiple gold bearing zones.

Ternera is the first of five targets identified at El Zorro to be drilled.

Tesoro Managing Director Zeff Reeves commented:
"Tesoro's drilling success continues at El Zorro with another solid set of assay results. These results are particularly significant as they are defining a set of continuous high-grade structures developing in the south west sector of Ternera, as well as showing significant scope for expansions to the north west. El Zorro really is shaping up as a significant gold system, with multiple mineralised styles present."

Significant intercepts returned are presented in Table 1. A full table of significant intercepts is presented in Appendix 1.

COMMENTARY

Hole ZDDH00041 returned shallow mineralisation from the CC200 fault zone. High grade intercepts of 0.50m @ 29.90g/t Au from 127.50m and 5.00m @ 5.91g/t Au from 140.00m were returned from the CC175 and a linking fault between the CC175 and CC200. This hole has further defined an emerging high grade gold zone associated with the CC150 and CC200 faults.

Hole ZDDH00043 was an infill drill hole and intercepted mineralisation associated with CC350 and CC400 fault zones, and adjacent sheeted veining associated with these faults.

Hole ZDDH00044 was drilled to test a deep Induced Polarisation anomaly on the western edge of the projected northern extension of the Ternera mineralised zone. The hole returned a narrow intercept associated with quartz veining within pelitic sediments. Results from this hole indicate that the Ternera mineralisation remains open to the north and northwest.

Hole ZDDH00047 was drilled to test the south east extensions of the Ternera mineralisation. The hole returned a broad, shallow intercept associated with CC300 and CC350 fault zones. A well-defined high-grade zone was intercepted within the CC300 fault zone of 2.00m @ 11.00g/t Au and correlates well with mineralisation previously reported (ASX announcement 23 October 2020) from ZDDH00038 approximately 70m to the north along the fault.

Hole ZDDH00047 and ZDDH00050 were drilled to extend the interpreted Ternera high grade gold zone to the west and to the north. Both holes successfully intercepted mineralisation associated with the CC400 to CC425 fault zones and adjacent sheeted vein complexes. These holes have successfully expanded the Ternera high grade gold zone to the north west and mineralisation remains open to the north west and at depth. Holes ZDDH00067 and ZDDH00068 have recently been completed to further expand this mineralised zone and are awaiting assays.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0041	2.00	12.00	10.00	0.55	
ZDDH0041	6.00	8.00	2.00	1.33	*including*
ZDDH0041	23.50	52.00	28.50	0.38	
ZDDH0041	23.50	32.00	8.50	0.48	*including*
ZDDH0041	29.00	32.00	3.00	0.99	*including*
ZDDH0041	40.00	46.00	6.00	0.61	
ZDDH0041	106.20	108.00	1.80	3.49	
ZDDH0041	127.50	128.00	0.50	29.90	
ZDDH0041	140.00	145.00	5.00	5.91	
ZDDH0041	141.65	143.50	1.85	15.22	*including*
ZDDH0043	5.30	56.00	50.70	0.45	
ZDDH0043	5.30	22.50	17.20	0.94	*including*
ZDDH0043	9.50	13.00	3.50	3.44	*including*
ZDDH0043	80.00	105.00	25.00	0.41	
ZDDH0043	81.00	85.00	4.00	0.87	*including*
ZDDH0043	103.00	105.00	2.00	1.60	*including*
ZDDH0043	241.00	242.00	1.00	1.02	
ZDDH0044	104.00	107.00	3.00	0.92	
ZDDH0044	104.00	105.00	1.00	2.25	*including*
ZDDH0047	30.00	134.50	104.50	0.56	
ZDDH0047	35.00	36.00	1.00	2.98	*including*
ZDDH0047	74.00	75.00	1.00	2.03	*including*
ZDDH0047	97.00	134.80	37.80	1.23	*including*
ZDDH0047	97.00	109.00	12.00	2.68	*including*
ZDDH0047	97.00	99.00	2.00	11.00	*including*
ZDDH0047	130.00	134.80	4.80	2.71	*including*
ZDDH0047	210.00	211.00	1.00	1.78	
ZDDH0047	288.00	289.00	1.00	1.19	
ZDDH0048	45.00	90.00	45.00	0.54	
ZDDH0048	53.50	54.50	1.00	3.15	*including*
ZDDH0048	47.00	55.00	8.00	1.02	*including*
ZDDH0048	80.00	83.00	3.00	4.18	*including*
ZDDH0050	6.00	16.00	10.00	1.56	
ZDDH0050	7.00	8.00	1.00	10.65	*including*
ZDDH0050	92.00	93.00	1.00	2.55	
ZDDH0050	157.00	222.00	65.00	0.84	
ZDDH0050	183.00	185.00	2.00	2.02	*including*
ZDDH0050	192.00	193.00	1.00	2.35	*including*
ZDDH0050	202.00	209.00	7.00	5.84	*including*
ZDDH0050	205.00	207.50	2.50	15.92	*including*
ZDDH0050	220.00	221.00	1.00	1.27	*including*

Table 1 – Significant drill results for holes ZDDH00041, ZDDH00043, ZDDH00044, ZDDH00047, ZDH00048 and ZDDH00050, results are uncut, no top cut has been applied. A full table of significant intercepts is presented in Appendix 1.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

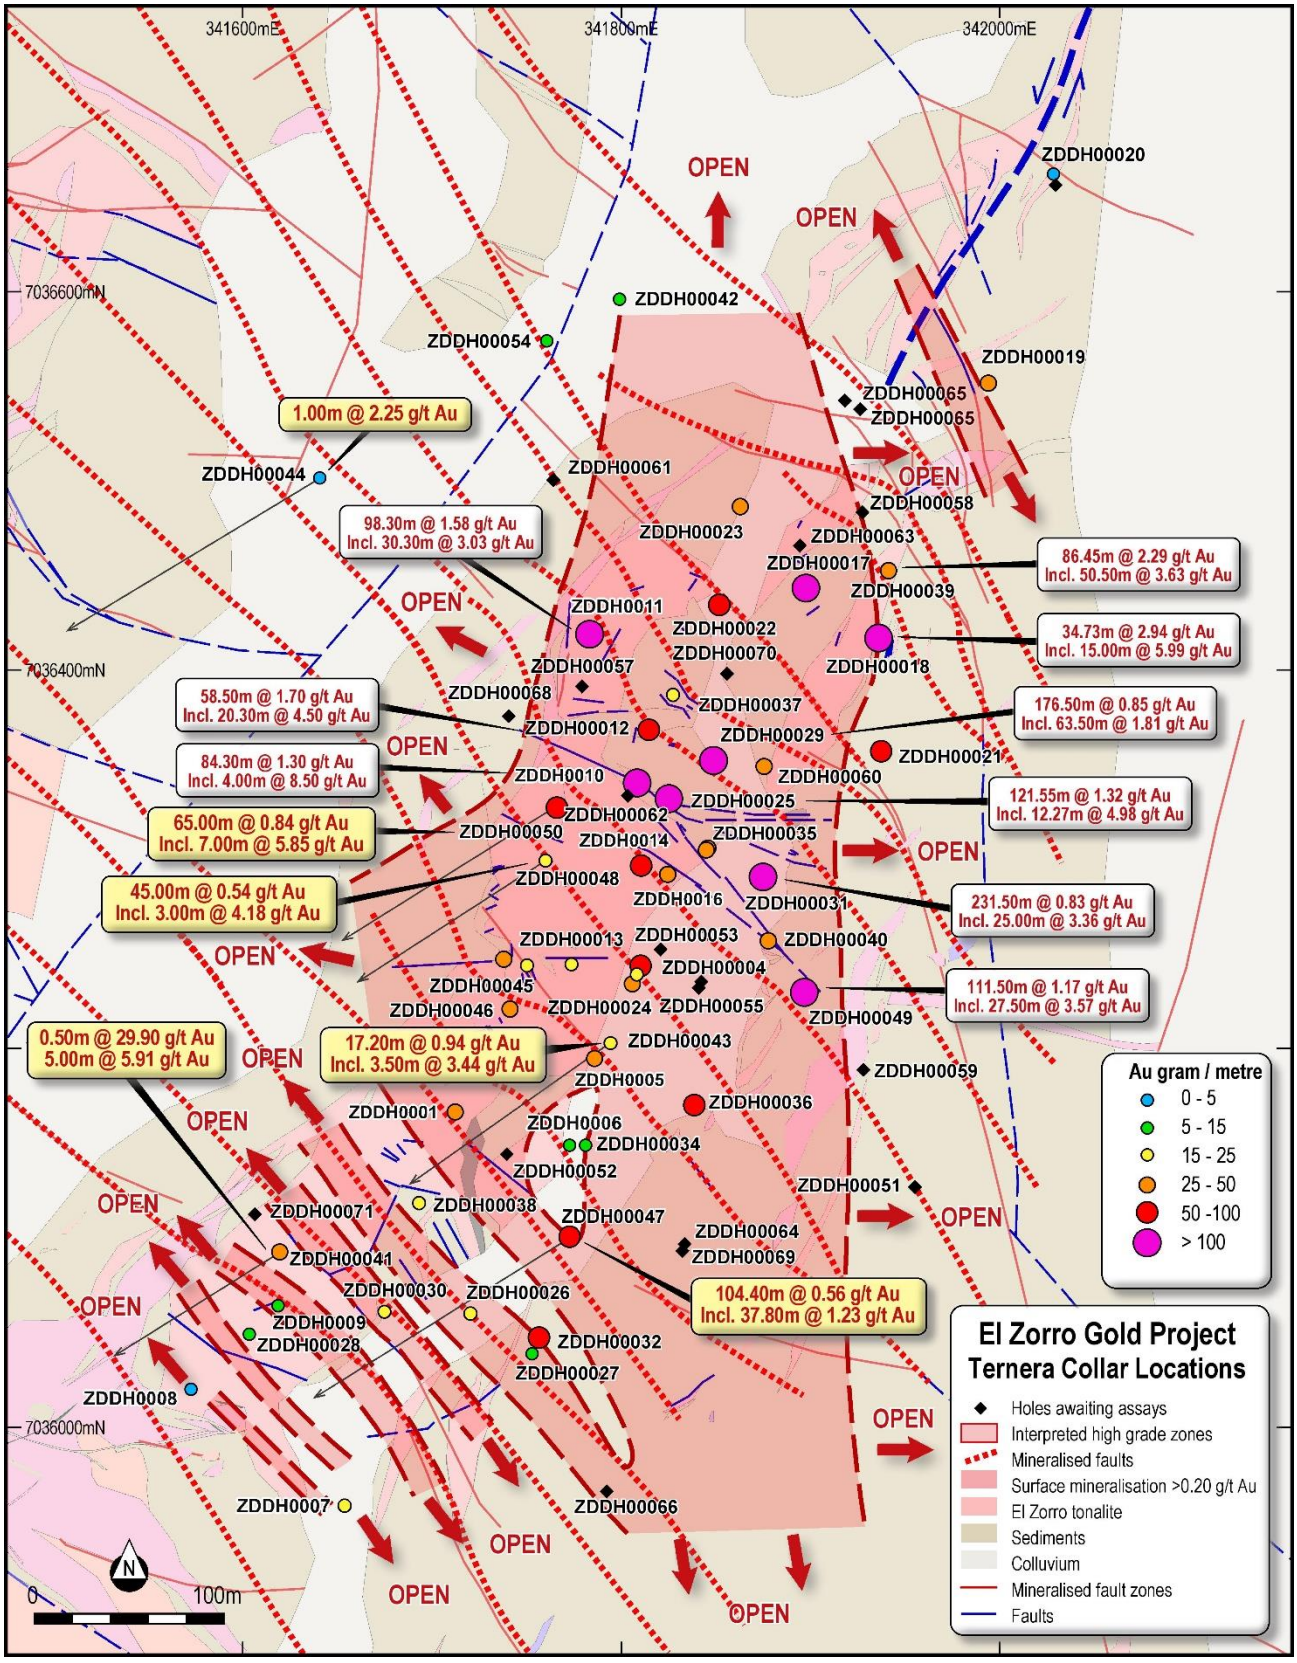


Figure 1 – Ternera Drilling – collar locations on geology with selected significant intercepts. Results reported in this announcement in gold highlight. PSAD56/19S datum.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

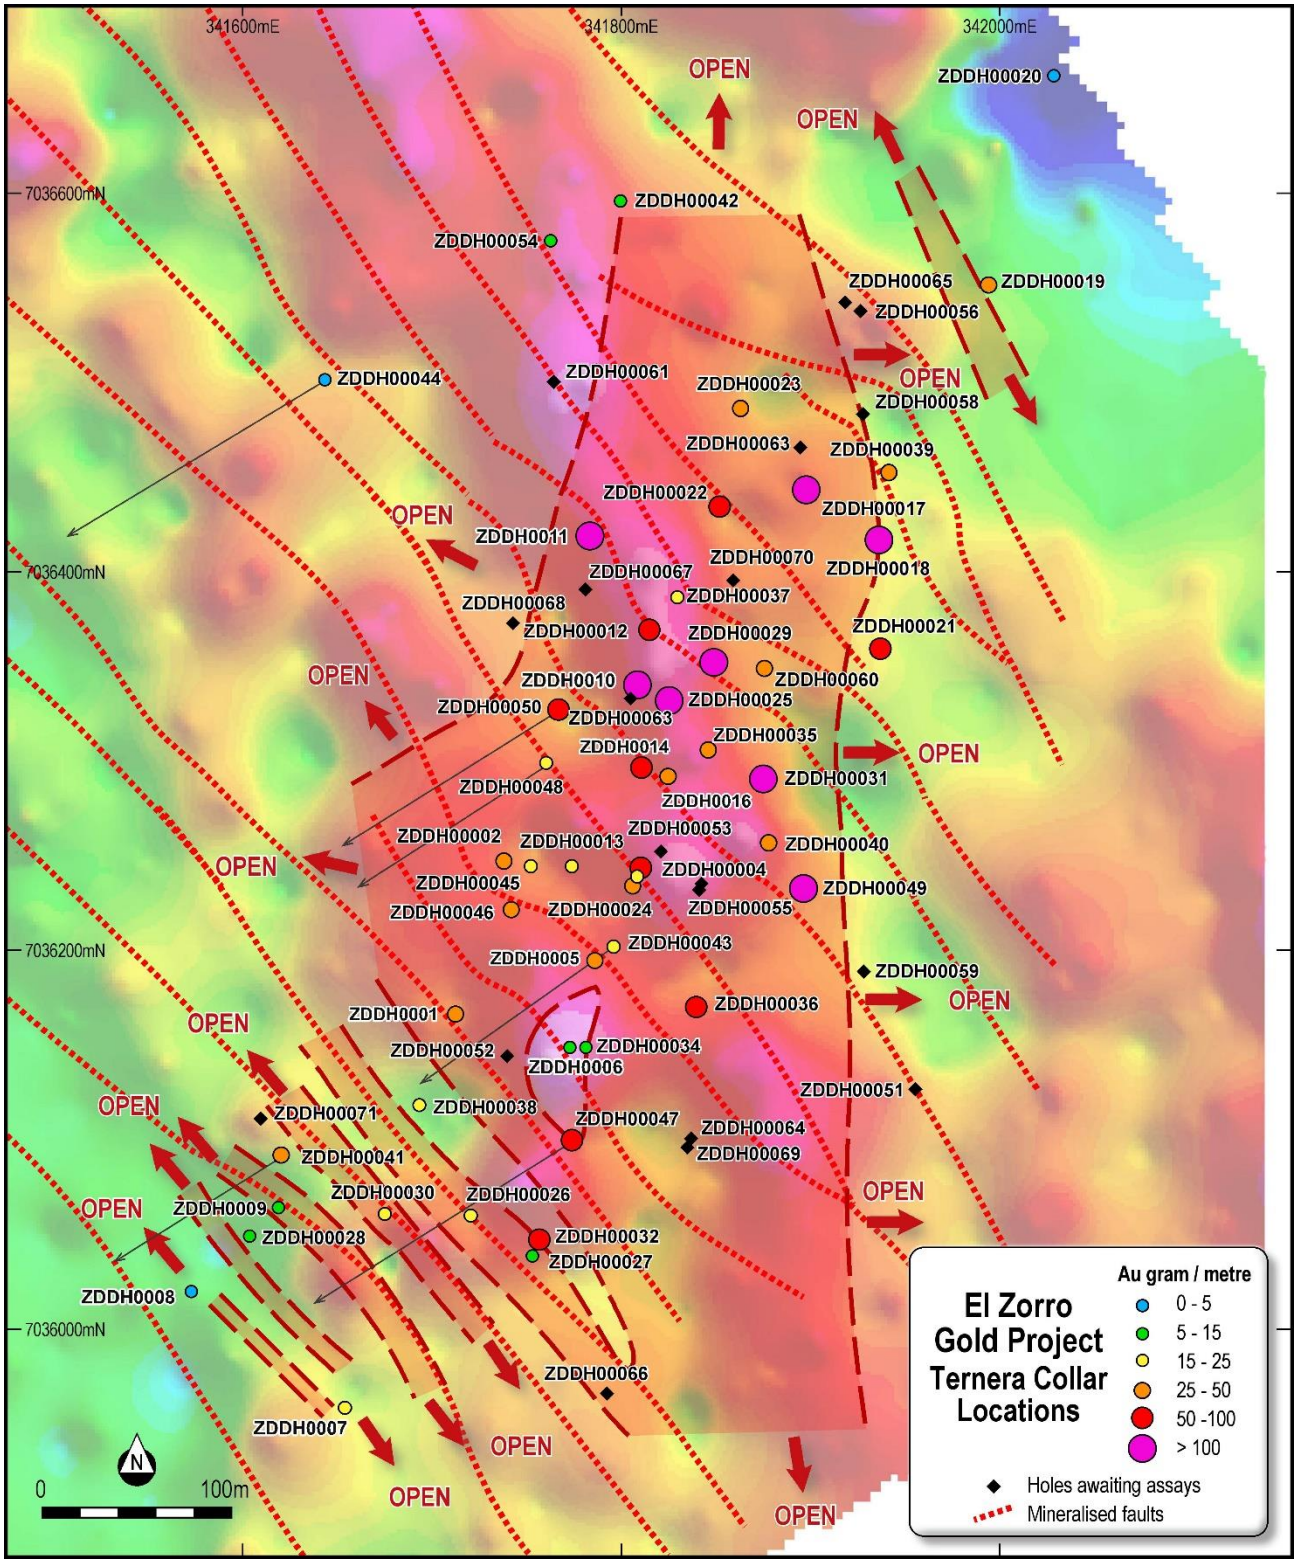


Figure 2- Ternera Prospect chargeability 0.5 Vertical derivative Gradient Array Induced Polarisation image and current drill program completed holes colour coded to g/m intercept. PSAD56/19S datum.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

Hole ID	Hole Location			Hole Orientation		Drill Depth (m)
	Northing	Easting	Elevation	Dip	Azimuth	
ZDDH00028	7036049	341605	581	-60	240	220.60
ZDDH00029	7036351	341849	603	-60	240	250.00
ZDDH00030	7036061	341676	569	-60	240	250.00
ZDDH00031	7036290	341875	605	-60	240	320.00
ZDDH00032	7036047	341757	584	-60	60	285.90
ZDDH00033	7036305	341846	599	-60	240	205.00
ZDDH00034	7036149	341781	579	-60	240	220.60
ZDDH00035	7036349	341876	612	-60	240	283.20
ZDDH00036	7036169	341840	597	-60	240	280.30
ZDDH00037	7036387	341829	624	-60	240	230.00
ZDDH00038	7036118	341693	584	-60	240	299.30
ZDDH00039	7036452	341942	658	-60	240	310.00
ZDDH00040	7036257	341878	607	-60	240	300.00
ZDDH00041	7036092	341621	591	-60	240	200.00
ZDDH00042	7036595	341800	610	-60	240	201.00
ZDDH00043	7036203	341796	584	-60	240	250.00
ZDDH00044	7036501	341643	588	-60	240	308.20
ZDDH00045	7036243	341751	610	-60	240	271.20
ZDDH00046	7036220	341742	613	-60	240	260.00
ZDDH00047	7036100	341774	578	-60	240	320.00
ZDDH00048	7036298	341760	615	-60	240	230.00
ZDDH00049	7036228	341897	626	-60	240	300.00
ZDDH00050	7036327	341767	631	-60	240	250.00
ZDDH00051	7036127	341955	646	-60	240	364.40
ZDDH00052	7036144	341740	601	-60	240	200.00
ZDDH00053	7036251	341821	588	-60	240	300.00
ZDDH00054	7036573	341763	607	-60	240	350.00
ZDDH00055	7036235	341843	609	-60	240	341.00
ZDDH00056	7036538	341927	640	-60	240	305.30
ZDDH00057	7036231	341842	605	-60	60	360.50
ZDDH00058	7036484	341928	654	-60	240	300.00
ZDDH00059	7036189	341929	636	-60	240	320.00
ZDDH00060	7036348	341872	618	-60	60	290.00
ZDDH00061	7036499	341765	605	-60	240	299.40
ZDDH00062	7036333	341803	624	-60	240	300.00
ZDDH00063	7036466	341895	637	-60	60	337.30
ZDDH00064	7036096	341836	604	-60	240	326.80
ZDDH00065	7036542	341918	636	-60	60	269.30
ZDDH00066	7035966	341793	616	-60	60	474.80
ZDDH00067	7036389	341781	647	-60	240	306.80
ZDDH00068	7036371	341744	627	-60	240	323.00
ZDDH00069	7036094	341834	602	-60	60	426.70
ZDDH00070	7036397	341858	628	-60	240	294.20
ZDDH00071	7036112	341610	582	-60	240	223.20

Table 2 – Drill hole details for holes completed to date in the current phase of drilling. Co-ordinate system is PSAD56-19S.

Authorised by the Board of Tesoro Resources Limited.

For more information:

Company:
Zeff Reeves Managing Director
Tesoro Resources Limited
+61 8 9322 1587

Investors:
Peter Taylor
NWR Communications
+61 (0) 412 036 231
peter@nwrcommunications.com.au

About Tesoro

Tesoro Resources Limited was established with a strategy of acquiring, exploring and developing mining projects in the Coastal Cordillera region of Chile. The Coastal Cordillera region is host to multiple world class copper and gold mines, has well established infrastructure, service providers and an experienced mining workforce. Large areas of the Coastal Cordillera remain unexplored due to the unconsolidated nature of mining concession ownership, but Tesoro, via its in-country network and experience has been able secure rights to a district scale gold project in-line with the Company's strategy. Tesoro has rights to acquire up to 80% of the El Zorro Gold Project.



Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled by Mr Zeffron Reeves (B App Sc (Hons) Applied Geology) MBA, MAIG). Mr Reeves is a member of the Australian Institute of Geoscientists and a Director and major shareholder of the Company. Mr Reeves has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Reeves consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

Future Performance

This announcement may contain certain forward-looking statements and opinion. Forward-looking statements, including projections, forecasts and estimates, are provided as a general guide only and should not be relied on as an indication or guarantee of future performance and involve known and unknown risks, uncertainties, assumptions, contingencies and other important factors, many of which are outside the control of the Company and which are subject to change without notice and could cause the actual results, performance or achievements of the Company to be materially different from the future results, performance or achievements expressed or implied by such statements. Past performance is not necessarily a guide to future performance and no representation or warranty is made as to the likelihood of achievement or reasonableness of any forward-looking statements or other forecast. Nothing contained in this announcement nor any information made available to you is, or and shall be relied upon as, a promise, representation, warranty or guarantee as to the past, present or the future performance of Tesoro.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

APPENDIX 1 – Significant Intercept Table

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0001	5.00	119.00	114.00	0.35	
ZDDH0001	5.00	15.00	10.00	0.55	*including*
ZDDH0001	5.00	51.30	46.30	0.45	*including*
ZDDH0001	12.00	13.00	1.00	1.64	*including*
ZDDH0001	14.30	15.00	0.70	2.35	*including*
ZDDH0001	33.64	39.00	5.36	0.97	*including*
ZDDH0001	44.30	51.30	7.00	0.67	*including*
ZDDH0001	64.00	65.00	1.00	2.50	*including*
ZDDH0001	75.50	79.00	3.50	0.89	*including*
ZDDH0001	75.50	76.00	0.50	4.82	*including*
ZDDH0001	107.00	112.00	5.00	1.11	*including*
ZDDH0001	117.00	119.00	2.00	2.05	*including*
ZDDH0002	5.70	68.00	62.30	0.54	
ZDDH0002	8.80	24.30	15.50	1.15	*including*
ZDDH0002	8.80	14.00	5.20	1.96	*including*
ZDDH0002	51.70	68.00	16.30	0.78	*including*
ZDDH0002	58.00	61.00	3.00	3.62	*including*
ZDDH0003	21.00	77.30	56.30	0.50	
ZDDH0003	21.00	27.00	6.00	1.96	*including*
ZDDH0003	21.00	22.83	1.83	5.24	*including*
ZDDH0003	37.20	43.00	5.80	1.27	*including*
ZDDH0003	47.30	48.00	0.70	2.00	*including*
ZDDH0003	64.00	77.30	13.30	0.41	*including*
ZDDH0003	90.00	91.00	1.00	1.53	
ZDDH0004	5.00	66.00	61.00	0.97	
ZDDH0004	56.00	66.00	10.00	4.53	*including*
ZDDH0004	57.00	61.00	4.00	9.60	*including*
ZDDH0005	4.00	42.65	38.65	0.65	
ZDDH0005	4.00	32.00	28.00	0.84	*including*
ZDDH0005	9.80	28.00	18.20	1.17	*including*
ZDDH0005	9.80	10.15	0.35	20.10	*including*
ZDDH0005	51.60	52.00	0.40	2.03	
ZDDH0005	65.00	67.00	2.00	1.03	
ZDDH0005	72.00	85.90	13.90	0.52	
ZDDH0005	72.00	75.00	3.00	1.90	*including*
ZDDH0005	72.00	73.00	1.00	4.32	*including*
ZDDH0005	100.60	102.00	1.40	2.07	
ZDDH0005	130.00	132.60	2.60	0.66	
ZDDH0005	135.80	136.80	1.00	12.20	
ZDDH0005	0.00	88.00	88.00	0.15	
ZDDH0006	2.40	3.00	0.60	0.75	*including*
ZDDH0006	22.60	25.95	3.35	2.14	*including*
ZDDH0006	24.00	25.00	1.00	6.10	*including*
ZDDH0006	46.70	50.30	3.60	0.32	*including*
ZDDH0006	61.10	64.02	2.92	0.42	*including*
ZDDH0006	108.30	116.00	7.70	0.30	*including*
ZDDH0006	133.50	135.60	2.10	1.30	*including*
ZDDH0006	148.00	151.80	3.80	0.59	*including*
ZDDH0006	180.10	244.00	63.90	0.23	*including*
ZDDH0006	180.10	181.10	1.00	0.55	*including*
ZDDH0006	184.00	186.00	2.00	1.06	*including*
ZDDH0006	207.00	212.00	5.00	0.77	*including*
ZDDH0006	226.00	227.00	1.00	0.55	*including*
ZDDH0006	236.00	244.00	8.00	0.66	*including*
ZDDH0007	1.00	4.00	3.00	4.75	
ZDDH0007	39.00	66.20	27.20	0.70	
ZDDH0007	39.00	58.00	19.00	0.80	*including*
ZDDH0007	104.85	110.00	5.15	0.34	
ZDDH0007	117.40	118.00	0.60	2.75	
ZDDH0008	35.00	41.10	6.10	0.28	
ZDDH0008	58.00	59.00	1.00	1.43	

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0009	4.00	6.00	2.00	1.39	
ZDDH0009	12.55	38.00	25.45	0.51	
ZDDH0009	21.00	26.00	5.00	1.09	*including*
ZDDH0009	48.00	48.50	0.50	2.19	
ZDDH0009	78.00	83.00	5.00	0.59	
ZDDH0010	31.00	33.00	2.00	2.47	
ZDDH0010	60.00	61.00	1.00	1.16	
ZDDH0010	66.00	67.00	1.00	1.04	
ZDDH0010	75.00	159.30	84.30	1.30	
ZDDH0010	75.00	104.00	29.00	2.95	*including*
ZDDH0010	82.50	86.45	3.95	4.97	*including*
ZDDH0010	91.00	102.00	11.00	4.70	*including*
ZDDH0010	93.00	97.00	4.00	8.50	*including*
ZDDH0010	120.00	126.00	6.00	1.11	*including*
ZDDH0010	149.00	159.00	10.00	1.07	*including*
ZDDH0011	176.00	274.30	98.30	1.58	
ZDDH0011	181.70	212.00	30.30	3.03	*including*
ZDDH0011	196.40	212.00	15.60	3.87	*including*
ZDDH0011	203.00	203.70	0.70	21.70	*including*
ZDDH0011	203.00	212.00	9.00	5.07	*including*
ZDDH0011	217.00	222.00	5.00	4.13	*including*
ZDDH0011	246.60	256.40	9.80	2.28	*including*
ZDDH0012	0.00	58.80	58.80	1.70	
ZDDH0012	1.70	22.00	20.30	4.50	*including*
ZDDH0012	1.70	8.40	6.70	12.21	*including*
ZDDH0012	2.30	4.70	2.40	33.35	*including*
ZDDH0012	17.60	22.00	4.40	2.00	*including*
ZDDH0012	17.60	20.00	2.40	2.82	*including*
ZDDH0012	53.20	58.80	5.60	0.95	
ZDDH0012	53.20	56.00	2.80	1.42	*including*
ZDDH0012	151.80	152.20	0.40	2.29	
ZDDH0013	0.00	3.00	3.00	0.83	
ZDDH0013	9.00	14.30	5.30	0.41	
ZDDH0013	25.00	29.80	4.80	0.72	
ZDDH0013	28.55	29.80	1.25	2.14	*including*
ZDDH0013	46.30	70.00	23.70	0.85	
ZDDH0013	46.30	51.50	5.20	1.24	*including*
ZDDH0013	51.25	65.35	14.10	1.08	*including*
ZDDH0013	58.00	65.35	7.35	1.65	*including*
ZDDH0013	102.00	104.00	2.00	0.79	
ZDDH0013	136.00	137.30	1.30	4.97	
ZDDH0013	165.00	173.60	8.60	1.60	
ZDDH0013	170.40	173.00	2.60	2.80	*including*
ZDDH0014	15.30	70.60	55.30	1.01	
ZDDH0014	15.30	34.00	18.70	2.19	*including*
ZDDH0014	15.30	26.30	11.00	3.40	*including*
ZDDH0014	23.00	26.30	3.30	6.18	*including*
ZDDH0014	64.60	70.60	6.00	2.03	*including*
ZDDH0014	64.60	67.35	2.75	5.00	*including*
ZDDH0014	112.00	122.50	10.50	0.52	
ZDDH0014	115.00	117.00	2.00	1.75	*including*
ZDDH0014	177.20	179.00	1.80	2.37	
ZDDH0015	37.90	39.70	1.80	1.11	
ZDDH0015	91.90	132.70	40.80	0.37	
ZDDH0015	91.90	94.60	2.70	1.64	*including*
ZDDH0015	112.00	116.00	4.00	1.13	*including*
ZDDH0015	240.60	242.00	1.40	8.46	
ZDDH0015	265.90	269.00	3.10	0.64	
ZDDH0016	125.00	131.72	6.72	1.47	
ZDDH0016	152.00	204.60	52.60	0.62	
ZDDH0016	188.10	194.00	5.90	3.30	*including*
ZDDH0016	188.58	188.90	0.32	31.30	*including*
ZDDH0016	203.60	204.60	1.00	3.00	*including*
ZDDH0016	281.00	290.00	9.00	0.36	
ZDDH0016	287.50	290.00	2.50	0.77	*including*

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0017	44.00	74.00	30.00	0.94	
ZDDH0017	44.00	60.10	16.10	1.05	*including*
ZDDH0017	44.00	47.00	3.00	4.27	*including*
ZDDH0017	70.00	74.00	4.00	4.26	*including*
ZDDH0017	103.46	105.60	2.14	1.76	
ZDDH0017	167.55	254.00	86.45	2.29	*including*
ZDDH0017	182.70	233.20	50.50	3.63	*including*
ZDDH0017	183.22	206.22	23.00	7.20	*including*
ZDDH0017	190.00	205.00	15.00	10.82	*including*
ZDDH0017	197.00	202.30	5.30	25.31	*including*
ZDDH0017	200.00	202.30	2.30	46.41	*including*
ZDDH0018	187.27	222.00	34.73	2.94	
ZDDH0018	187.27	211.00	23.73	4.09	*including*
ZDDH0018	197.00	199.70	2.70	22.21	*including*
ZDDH0018	189.00	204.00	15.00	5.99	*including*
ZDDH0019	21.00	89.52	68.52	0.47	
ZDDH0019	36.00	45.00	9.00	1.34	*including*
ZDDH0019	74.00	79.00	5.00	1.23	*including*
ZDDH0020	87.30	87.60	0.30	3.33	
ZDDH0021	100.92	116.50	15.58	0.95	
ZDDH0021	107.50	112.00	4.50	1.24	*including*
ZDDH0021	100.92	101.70	0.78	8.44	*including*
ZDDH0021	189.25	208.50	19.25	2.86	*open downhole*
ZDDH0021	189.25	201.30	12.05	4.25	*including*
ZDDH0021	189.25	195.40	6.15	7.37	*including*
ZDDH0021	193.90	195.40	1.50	20.82	*including*
ZDDH0022	30.00	31.00	1.00	3.16	
ZDDH0022	78.00	119.17	41.17	1.38	
ZDDH0022	94.40	95.45	1.05	2.98	*including*
ZDDH0022	105.00	119.17	14.17	3.25	*including*
ZDDH0022	105.00	110.32	5.32	6.54	*including*
ZDDH0023	146.70	151.00	4.30	7.25	
ZDDH0023	146.70	149.00	2.30	13.30	*including*
ZDDH0023	273.00	277.00	4.00	1.06	
ZDDH0023	276.00	277.00	1.00	3.32	*including*
ZDDH0024	6.00	9.00	3.00	1.63	
ZDDH0024	41.00	78.00	37.00	0.86	
ZDDH0024	41.00	45.50	4.50	2.12	*including*
ZDDH0024	44.10	45.50	1.40	5.93	*including*
ZDDH0024	54.50	57.00	2.50	1.87	*including*
ZDDH0024	56.50	69.50	13.00	1.12	*including*
ZDDH0024	66.00	69.50	3.50	2.53	*including*
ZDDH0024	155.00	169.00	14.00	3.06	
ZDDH0024	162.20	163.50	1.30	19.72	*including*
ZDDH0024	161.80	167.00	5.20	6.97	*including*
ZDDH0025	49.00	170.55	121.55	1.32	
ZDDH0025	73.10	84.00	10.90	4.57	*including*
ZDDH0025	75.00	82.00	7.00	6.14	*including*
ZDDH0025	104.00	118.00	14.00	1.63	*including*
ZDDH0025	110.00	113.60	3.60	4.97	*including*
ZDDH0025	148.00	160.27	12.27	4.98	*including*
ZDDH0025	148.00	170.55	22.55	2.98	*including*
ZDDH0025	155.20	159.90	4.70	10.69	*including*
ZDDH0026	92.00	110.00	18.00	1.36	
ZDDH0026	105.40	110.00	4.60	4.99	*including*
ZDDH0026	233.00	242.00	9.00	1.85	
ZDDH0026	240.00	242.00	2.00	7.31	*including*
ZDDH0027	176.00	206.50	30.50	0.40	
ZDDH0027	176.00	202.00	26.00	0.44	*including*
ZDDH0027	176.00	188.00	12.00	0.64	*including*
ZDDH0027	176.00	182.00	6.00	1.21	*including*

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0028	14.00	14.75	0.75	3.23	
ZDDH0028	21.00	28.00	7.00	0.85	
ZDDH0028	25.00	25.90	0.90	5.03	*including*
ZDDH0028	42.00	49.00	7.00	0.61	
ZDDH0028	43.90	45.00	1.10	1.10	*including*
ZDDH0029	29.50	206.00	176.50	0.85	
ZDDH0029	29.50	93.00	63.50	1.81	*including*
ZDDH0029	29.50	31.20	1.70	1.20	*including*
ZDDH0029	43.00	48.00	5.00	2.76	*including*
ZDDH0029	56.64	61.84	5.20	3.36	*including*
ZDDH0029	72.00	80.00	8.00	1.24	*including*
ZDDH0029	91.00	93.00	2.00	33.00	*including*
ZDDH0029	121.00	130.70	9.70	0.53	
ZDDH0029	121.00	122.00	1.00	3.20	*including*
ZDDH0029	167.40	195.00	27.60	0.85	
ZDDH0029	176.30	185.90	9.60	1.82	*including*
ZDDH0029	180.00	183.00	3.00	4.75	*including*
ZDDH0029	193.00	195.00	2.00	1.75	*including*
ZDDH0030	5.20	6.40	1.20	0.74	
ZDDH0030	50.00	76.00	26.00	0.69	
ZDDH0030	66.00	76.00	10.00	1.54	*including*
ZDDH0030	66.00	71.10	5.10	2.64	*including*
ZDDH0030	66.00	67.00	1.00	6.89	*including*
ZDDH0030	70.00	71.10	1.10	5.73	*including*
ZDDH0030	101.00	102.50	1.50	1.13	
ZDDH0030	117.00	120.00	3.00	3.23	
ZDDH0030	117.00	119.13	2.13	4.15	*including*
ZDDH0030	165.00	167.00	2.00	4.05	
ZDDH0030	195.40	199.00	3.60	1.41	*open downhole*
ZDDH0030	202.95	203.90	0.95	5.12	*open downhole*
ZDDH0031	72.00	303.00	231.00	0.83	
ZDDH0031	72.00	126.00	54.00	1.69	
ZDDH0031	72.00	75.60	3.60	1.27	*including*
ZDDH0031	100.00	104.44	4.44	1.04	*including*
ZDDH0031	100.00	125.00	25.00	3.36	*including*
ZDDH0031	118.30	125.00	6.70	11.57	*including*
ZDDH0031	146.40	154.00	7.60	0.79	*including*
ZDDH0031	171.60	173.00	1.40	1.40	*including*
ZDDH0031	193.30	217.60	24.30	2.43	*including*
ZDDH0031	193.30	208.00	14.70	3.77	*including*
ZDDH0031	193.30	197.00	3.70	4.16	*including*
ZDDH0031	204.34	217.60	13.26	3.25	*including*
ZDDH0031	204.34	208.00	3.66	10.76	*including*
ZDDH0031	228.00	229.00	1.00	2.17	*including*
ZDDH0031	248.00	263.90	15.90	1.04	*including*
ZDDH0031	291.00	295.00	4.00	1.00	*including*
ZDDH0032	3.20	6.00	2.80	1.23	
ZDDH0032	17.30	18.30	1.00	7.09	
ZDDH0032	43.50	44.00	0.50	5.70	
ZDDH0032	75.00	76.00	1.00	5.02	
ZDDH0032	128.00	204.00	76.00	0.93	
ZDDH0032	128.00	140.00	12.00	1.39	*including*
ZDDH0032	132.63	135.00	2.37	4.30	*including*
ZDDH0032	157.00	162.00	5.00	2.41	*including*
ZDDH0032	171.00	174.80	3.80	1.92	*including*
ZDDH0032	178.30	197.00	18.70	1.57	*including*
ZDDH0032	178.30	179.40	1.10	5.15	*including*
ZDDH0032	191.00	197.00	6.00	2.58	*including*
ZDDH0033	40.00	68.00	28.00	1.22	
ZDDH0033	57.00	67.00	10.00	3.17	*including*
ZDDH0033	59.00	63.00	4.00	5.96	*including*
ZDDH0033	100.00	104.00	4.00	1.51	
ZDDH0033	134.70	137.00	2.30	1.27	
ZDDH0033	143.00	144.00	1.00	1.45	

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0034	17.00	28.00	11.00	0.79	
ZDDH0034	23.00	24.00	1.00	4.59	*including*
ZDDH0034	27.00	28.00	1.00	1.77	*including*
ZDDH0034	62.22	63.34	1.12	2.85	
ZDDH0034	87.00	92.84	5.84	1.12	
ZDDH0034	89.00	91.00	2.00	2.45	
ZDDH0034	105.40	106.00	0.60	1.15	
ZDDH0034	116.00	117.00	1.00	1.17	
ZDDH0034	172.00	173.00	1.00	1.68	
ZDDH0034	180.40	181.50	1.10	6.58	
ZDDH0034	193.00	194.00	1.00	2.73	
ZDDH0034	202.00	203.00	1.00	2.12	
ZDDH0035	67.00	68.00	1.00	2.67	
ZDDH0035	81.10	110.34	29.24	1.05	
ZDDH0035	89.00	94.00	5.00	4.11	*including*
ZDDH0035	84.00	106.00	22.00	1.34	*including*
ZDDH0035	144.00	155.00	11.00	1.15	
ZDDH0035	153.00	155.00	2.00	4.41	*including*
ZDDH0035	162.00	164.00	2.00	1.03	
ZDDH0035	199.00	200.00	1.00	1.76	
ZDDH0035	192.00	238.00	46.00	0.72	
ZDDH0035	224.00	238.00	14.00	1.86	*including*
ZDDH0035	224.00	233.00	9.00	2.59	*including*
ZDDH0035	277.00	278.00	1.00	1.63	
ZDDH0036	74.00	125.00	51.00	1.07	
ZDDH0036	74.00	96.00	22.00	2.16	*including*
ZDDH0036	88.30	96.00	7.70	5.04	*including*
ZDDH0036	104.00	105.00	1.00	2.33	*including*
ZDDH0036	114.00	115.00	1.00	2.84	*including*
ZDDH0036	165.00	166.00	1.00	1.11	
ZDDH0036	215.00	216.00	1.00	1.60	
ZDDH0037	42.00	65.00	23.00	0.40	
ZDDH0037	42.00	42.68	0.68	1.55	*including*
ZDDH0037	56.00	65.00	9.00	0.70	*including*
ZDDH0037	56.00	57.00	1.00	2.47	*including*
ZDDH0037	62.00	64.00	2.00	1.32	*including*
ZDDH0037	149.00	172.00	23.00	0.82	
ZDDH0037	149.00	154.00	5.00	1.47	*including*
ZDDH0037	162.00	172.00	10.00	0.92	*including*
ZDDH0037	162.00	168.00	6.00	1.04	*including*
ZDDH0038	23.00	24.00	1.00	3.12	
ZDDH0038	74.20	113.00	38.80	0.49	
ZDDH0038	74.20	77.00	2.80	2.06	*including*
ZDDH0038	92.00	93.00	1.00	4.39	*including*
ZDDH0038	105.00	106.00	1.00	2.11	*including*
ZDDH0038	148.00	152.00	4.00	1.17	*including*
ZDDH0038	178.00	186.00	8.00	0.50	
ZDDH0038	185.00	186.00	1.00	2.48	*including*
ZDDH0038	200.00	208.10	8.10	1.12	*including*
ZDDH0038	202.00	204.00	2.00	3.72	*including*
ZDDH0039	2.50	5.60	3.10	0.39	
ZDDH0039	78.70	81.00	2.30	1.43	
ZDDH0039	188.00	252.50	64.50	0.47	
ZDDH0039	212.00	232.00	20.00	0.84	*including*
ZDDH0039	212.00	218.00	6.00	1.49	*including*
ZDDH0039	226.00	227.00	1.00	3.86	*including*
ZDDH0039	237.00	238.00	1.00	2.30	*including*
ZDDH0039	268.00	269.00	1.00	1.62	*including*
ZDDH0040	136.00	197.00	61.00	0.75	
ZDDH0040	136.00	152.00	16.00	1.96	*including*
ZDDH0040	136.00	146.00	10.00	2.61	*including*
ZDDH0040	142.00	146.00	4.00	5.34	*including*
ZDDH0040	160.00	164.00	4.00	0.95	*including*
ZDDH0040	161.00	162.00	1.00	2.84	*including*
ZDDH0040	182.00	188.00	6.00	0.72	*including*
ZDDH0040	195.00	197.00	2.00	2.75	*including*
ZDDH0040	288.00	291.00	3.00	1.24	*including*
ZDDH0041	2.00	12.00	10.00	0.55	
ZDDH0041	6.00	8.00	2.00	1.33	*including*
ZDDH0041	23.50	52.00	28.50	0.38	
ZDDH0041	23.50	32.00	8.50	0.48	*including*
ZDDH0041	29.00	32.00	3.00	0.99	*including*

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	*Comments*
ZDDH0041	40.00	46.00	6.00	0.61	
ZDDH0041	106.20	108.00	1.80	3.49	
ZDDH0041	127.50	128.00	0.50	29.90	
ZDDH0041	140.00	145.00	5.00	5.91	
ZDDH0041	141.65	143.50	1.85	15.22	*including*
ZDDH0042	112.00	127.00	15.00	0.68	
ZDDH0042	126.00	127.00	1.00	5.64	*including*
ZDDH0043	5.30	56.00	50.70	0.45	
ZDDH0043	5.30	22.50	17.20	0.94	*including*
ZDDH0043	9.50	13.00	3.50	3.44	*including*
ZDDH0043	80.00	105.00	25.00	0.41	
ZDDH0043	81.00	85.00	4.00	0.87	*including*
ZDDH0043	103.00	105.00	2.00	1.60	*including*
ZDDH0043	241.00	242.00	1.00	1.02	
ZDDH0044	104.00	107.00	3.00	0.92	
ZDDH0044	104.00	105.00	1.00	2.25	*including*
ZDDH0045	23.00	50.00	27.00	0.59	
ZDDH0045	36.00	46.20	10.20	1.07	*including*
ZDDH0045	36.00	40.00	4.00	1.80	*including*
ZDDH0045	97.00	98.00	1.00	1.91	
ZDDH0045	196.30	203.00	6.70	1.10	
ZDDH0045	197.00	198.50	1.50	3.21	*including*
ZDDH0045	196.30	199.00	2.70	2.70	*including*
ZDDH0046	17.60	39.00	21.40	1.17	
ZDDH0046	26.00	31.00	5.00	3.75	*including*
ZDDH0046	28.00	31.00	3.00	5.71	*including*
ZDDH0046	180.00	181.00	1.00	1.11	
ZDDH0046	223.00	224.00	1.00	1.45	
ZDDH0046	248.60	250.00	1.40	1.35	
ZDDH0047	30.00	134.50	104.50	0.56	
ZDDH0047	35.00	36.00	1.00	2.98	*including*
ZDDH0047	74.00	75.00	1.00	2.03	*including*
ZDDH0047	97.00	134.80	37.80	1.23	*including*
ZDDH0047	97.00	109.00	12.00	2.68	*including*
ZDDH0047	97.00	99.00	2.00	11.00	*including*
ZDDH0047	130.00	134.80	4.80	2.71	*including*
ZDDH0047	210.00	211.00	1.00	1.78	
ZDDH0047	288.00	289.00	1.00	1.19	
ZDDH0048	45.00	90.00	45.00	0.54	
ZDDH0048	53.50	54.50	1.00	3.15	*including*
ZDDH0048	47.00	55.00	8.00	1.02	*including*
ZDDH0048	80.00	83.00	3.00	4.18	*including*
ZDDH0049	124.00	235.50	111.50	1.25	
ZDDH0049	124.00	182.00	58.00	2.04	*including*
ZDDH0049	154.00	181.50	27.50	3.57	*including*
ZDDH0049	124.00	141.00	17.00	1.11	*including*
ZDDH0049	124.00	125.00	1.00	10.25	*including*
ZDDH0049	159.00	172.00	13.00	5.32	*including*
ZDDH0049	159.00	165.00	6.00	4.17	*including*
ZDDH0049	177.00	182.00	5.00	5.14	*including*
ZDDH0049	213.00	235.50	22.50	0.89	*including*
ZDDH0049	215.00	218.00	3.00	1.39	*including*
ZDDH0049	227.00	235.50	8.50	1.81	*including*
ZDDH0049	231.00	235.50	4.50	3.07	*including*
ZDDH0049	245.00	246.00	1.00	1.66	
ZDDH0049	285.00	286.00	1.00	3.81	
ZDDH0049	290.00	291.00	1.00	1.12	
ZDDH0050	6.00	16.00	10.00	1.56	
ZDDH0050	7.00	8.00	1.00	10.65	*including*
ZDDH0050	92.00	93.00	1.00	2.55	
ZDDH0050	157.00	222.00	65.00	0.84	
ZDDH0050	183.00	185.00	2.00	2.02	*including*
ZDDH0050	192.00	193.00	1.00	2.35	*including*
ZDDH0050	202.00	209.00	7.00	5.84	*including*
ZDDH0050	205.00	207.50	2.50	15.92	*including*
ZDDH0050	220.00	221.00	1.00	1.27	*including*
ZDDH0054	91.00	110.00	19.00	0.46	
ZDDH0054	104.00	108.00	4.00	1.48	*including*
ZDDH0054	118.50	119.20	0.70	1.72	
ZDDH0054	252.00	253.00	1.00	1.23	
ZDDH0054	280.00	281.00	1.00	8.75	
ZDDH0054	336.00	337.00	1.00	1.23	

*For full results for holes ZDDH00001 to ZDDH00016 refer to Plukka Ltd Prospectus 30 October 2019. For results of ZDDH00017 to ZDDH00036 refer to TSO:ASX announcements 6 March,12 March, 27 April, 6 May, 27 May 2020, 10 June 2020, 26 August 2020 , 4 September 2020, 9 October 2020, 23 October 2020 and 4th November 2020.

+61 8 9322 1587 | info@tesororesources.com.au | Suite 5, 62 Ord Street, West Perth WA 6005 | www.tesororesources.com.au

APPENDIX 2 – JORC TABLES

JORC Table 1

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	• *Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.*	Tesoro has completed 71 diamond drill holes for 18,580.90m in 2017, 2018 and 2020 (ZDDH0001 to ZDDH0071). Diamond drill holes were drilled with HQ. Sampling was half core at geologically defined and significant mineralisation boundaries. Tesoro considers the sampling methodologies to be appropriate for this style of mineralisation.
	• *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.*	Tesoro Diamond drill holes were drilled with HQ. Sampling was half core at geological and significant mineralisation boundaries. Tesoro consider this appropriate for the style of mineralisation.
	• *Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done, this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.*	Diamond drilling was used to obtain ½ core samples of various lengths (minimum 0.25m), from which 1kg of material was pulverised passing 200 mesh to produce a 50g charge for fire assay fusion with a gravimetric finish. Multielement assays were completed by 4-acid digest with a 2.5g charge. Tesoro consider these appropriate assay techniques.
Drilling techniques	• *Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).*	Tesoro has completed 71 diamond drill holes for 18,580.90m Diamond drill holes were drilled with HQ. Sampling was half core at geological and significant mineralisation boundaries. Standard tube was used.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.*	Core recovery was estimated using the drillers recorded depth marks against the length of the core recovered. Reviewing the core photos, there are occasional shears/faults where core is broken. There is however no significant core loss.
	• *Measures taken to maximise sample recovery and ensure representative nature of the samples.*	A single tube system was employed and in general core recovery good.
	• *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.*	There appears to be no potential sample bias as there was no regular loss of core.
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.*	Geological core logging to a resolution of 25 cm was undertaken with a record kept of, inter alia, colour, lithology, weathering, grain size, mineralisation, alteration, geotechnical characteristics etc. Diamond core is stored at the Company's warehouse. Tesoro consider the data to be of an appropriate level of detail to support a future resource estimation.
	• *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.*	Logging of diamond core was qualitative and diamond core was photographed.
	• *The total length and percentage of the relevant intersections logged.*	All drilled intervals are logged and recorded.
Subsampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken.*	Drill core was cut, and half core was collected for analysis
	• *If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.*	Tesoro has not completed any percussion drilling.
	• *For all sample types, the nature, quality and appropriateness of the sample preparation technique.*	Collection of half core ensured the nature, quality and appropriateness of the collected sample. The sample preparation of crushing half core at the lab to mm size prior to splitting off a 50g charge (either by cone/quarter

Criteria	JORC Code explanation	Commentary
		or riffle) for pulverisation provides an appropriate and representative sample for analysis.
	• *Quality control procedures adopted for all subsampling stages to maximise representivity of samples.*	Half core was collected for the entirety of the Tesoro drilling, as such there was consistency throughout the drilling. Core was logged by a qualified geoscientist. Each subsample is considered to be representative of the interval.
	• *Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.*	Sampling of half core is representative of the in-situ material. There are field duplicate samples collected from the diamond core with irregular results. Field drill core duplicates are irregular by nature and it has been recommended by Tesoro's consultants to use coarse reject material to monitor the sample preparation.
	• *Whether sample sizes are appropriate to the grain size of the material being sampled.*	sample sizes collected were considered appropriate to reasonably represent the material being tested.
Quality of assay data and laboratory tests	• *The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.*	Assays were undertaken at the accredited laboratories at Bureau Veritas, Santiago and ALS Santiago, both of which are fully certified. Core samples of various lengths were assayed (minimum 0.25m) from which 1kg of material was pulverized passing 200 mesh to produce a 50 g charge for fire assay fusion with gravimetric finish. Multielement assays were completed by 4-acid digest with a 2.5 g charge. All techniques are appropriate for the element being determined.
	• *For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.*	Standard chemical analyses were used for grade determination. There was no reliance on determination of analysis by geophysical tools.
	• *Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.*	QAQC procedures included the insertion of Certified Reference Materials (CRMs) (5%) and blank material (2%), Check samples (5%) and check assaying 5% Cube Consulting Pty Ltd manage the database for Tesoro and note in there The laboratories used have generally demonstrated analytical accuracy at an acceptable level within 95% confidence limits.
Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.*	A number of independent consulting geoscientists (Cube Consulting, Oliver, and Cooley) external to Tesoro have verified the intersections for holes ZDDH0001 to ZDDH0016. Holes ZDDH0017 onwards have been verified by multiple appropriately qualified Company personnel.
	• *The use of twinned holes.*	no twinned holes have been completed
	• *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.*	Tesoro drilling is digitally entered and stored following documented core handling protocols. The protocols are considered adequate.
	• *Discuss any adjustment to assay data.*	No adjustments were made to Tesoro Drilling
Location of data points	• *Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.*	Tesoro drill hole collars have been surveyed accurately using differential GPS for holes ZDDH0001 to ZDDH00027. Holes ZDDH0028 onwards have been surveyed using handheld GPS and will be surveyed using differential GPS once the drill program has concluded.
	• *Specification of the grid system used.*	The grid system used PSAD56 19S
	• *Quality and adequacy of topographic control.*	The topography generated from an accurate topographic survey data completed by a registered surveyor and has been used for the current control.
Data spacing and distribution	• *Data spacing for reporting of Exploration Results.*	Drill hole spacing is variable between 25m and 200m
	• *Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.*	The spacing of drill holes is variable and satisfactory for reconnaissance level drilling. The holes are not intended to be used for resource estimates at this stage of exploration.
	• *Whether sample compositing has been applied.*	Sample composites was not employed.
Orientation of data in relation to geological structure	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.*	Drill holes were drilled across the interpreted strike of the mineralization

Criteria	JORC Code explanation	Commentary
	• *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	Tesoro diamond drilling at various orientations does not reveal any bias regarding the orientation of the mineralised horizons.
Sample security	• *The measures taken to ensure sample security.*	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory which to date has been Bureau Veritas and ALS Santiago. All sample collection was controlled by digital sample control file(s) and hardcopy ticket books.
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data.*	No audits have been undertaken.

(Criteria in this section apply to all succeeding sections)

Section 2: Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• *Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.*	Information regarding tenure is included in the Company's most recent quarterly report released to the ASX on 24 July 2020 and announcement released to the ASX on 31 July 2020.
	• *The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.*	The Concession is believed to be in good standing with the governing authority and there is no known impediment to operating in the area.
Exploration done by other parties	• *Acknowledgment and appraisal of exploration by other parties.*	Little historical exploration has been undertaken in either project area. Coeur d'Alene's Chilean exploration division undertook activities on the Ternera prospect, under an option agreement with the previous owners between April 1990 and January 1993.
Geology	• *Deposit type, geological setting and style of mineralisation.*	The mineralisation model is to likely to be intrusive related gold deposit. The key characteristics that are consistent with this style deposit include: • Low sulphide content, (typically <5%); reduced ore mineral assemblage that typically comprises pyrite and lacks primary magnetite or hematite • Mineralisation occurs as sheeted vein deposits or stockwork assemblages and often combine gold with variably elevated Bi, W, As, Mo, Te, and/or Sb but low concentrations of base metals as seen in the initial four holes by Tesoro at El Zorro • Restricted and commonly weak proximal hydrothermal alteration • Intrusions of intermediate to felsic composition.
Drillhole information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:* o *easting and northing of the drillhole collar* o *elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar* o *dip and azimuth of the hole* o *downhole length and interception depth* o *hole length.* • *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*	Information relating to current drill program presented in this report.
Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of*	No cutting of grades has been undertaken at this early stage of exploration drilling. Downhole intercepts are calculated using a length weighted averaging method.

Criteria	JORC Code explanation	Commentary
	high grades) and cut-off grades are usually Material and should be stated.	
	• *Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.*	All individual results for holes ZDDH00001 to ZDDH00016 are reported in prospectus dated 30th October 2019 lodged by Plukka Ltd. Down hole length weighted average results are calculated using a 0.20g/t Au cut off and a maximum of 5m internal dilution
	• *The assumptions used for any reporting of metal equivalent values should be clearly stated.*	No metal equivalents are reported.
Relationship between mineralisation widths and intercept lengths	• *These relationships are particularly important in the reporting of Exploration Results.*	
	• *If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.*	The mineralisation forms sub-vertical sheeted veins and individual veins and may form plunging zones within the mineralised structures. Drilling by Tesoro has been undertaken to test these orientations.
	• *If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').*	Exploration results are reported as downhole widths as the true width is not known with any certainty.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.*	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	• *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*	All assay results from drilling are reported. Reporting of visible gold occurrences in drill core is by visual inspection only and final gold content is not known until assay results have been received.
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	All material exploration data is reported in the body of the report.
Further work	• *The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).*	Further work will be focused on drill testing the Ternera mineralisation and additional prospects as defined in the work program. Core will be used for metallurgical testwork and resource modelling is planned.
	• *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*	Diagrams have been included in the body of this report.